

50HC

High Efficiency

Cooling Only/Electric Heat Packaged Rooftop

3 to 12.5 Nominal Tons



turn to the experts 

Product Data



WeatherMaster®



C10222



TABLE OF CONTENTS

	PAGE		PAGE
FEATURES AND BENEFITS	3	SELECTION PROCEDURE	32
MODEL NUMBER NOMENCLATURE	4	COOLING TABLES	33
FACTORY OPTIONS AND/OR ACCESSORIES	6	STATIC PRESSURE ADDERS	51
AHRI COOLING RATING TABLES	9	ECONO, BARO RELIEF & PE PERFORMANCE ...	52
SOUND PERFORMANCE TABLE	10	FAN PERFORMANCE	54
PHYSICAL DATA	11	ELECTRICAL INFORMATION	70
CURBS & WEIGHTS DIMENSIONS	14	SEQUENCE OF OPERATION	142
OPTIONS AND ACCESSORY WEIGHTS	29	GUIDE SPECIFICATIONS	145
APPLICATION DATA	30		



Your Carrier rooftop unit (RTU) was designed by customers for customers. With “no-strip” screw collars, handled access panels, and more we’ve made your unit easy to install, easy to maintain and easy to use.

Easy to install:

All WeatherMaster® units are field-convertible to horizontal air flow, which makes it easy to adjust to unexpected job-site complications. Lighter units make easy replacement. Most of Carrier’s 3-12.5 ton 50HC rooftops fit on existing Carrier curbs dating back to 1989. Also, our large control box gives you room to work and room to mount Carrier accessory controls.

Easy to maintain:

Easy access handles by Carrier provide quick and easy access to all normally serviced components. Our “no-strip” screw system has superior holding power and guides screws into position while preventing the screw from stripping the unit’s metal. Take accurate pressure readings by reading condenser pressure with panels on. Simply remove the black, composite plug, route your gauge line(s) through the hole, and connect them to the refrigeration service valve(s). Now, you can take refrigeration system pressure readings without affecting the condenser airflow.

Easy to use:

The newly designed, central terminal board by Carrier puts all your connections and troubleshooting points in one convenient place, standard. Most low voltage connections are made to the same board and make it easy to find what you’re looking for and easy to access it. Carrier rooftops have high and low pressure switches, a filter drier, and 2-in (51mm) filters standard.

FEATURES AND BENEFITS

- Single-stage cooling capacity control on 04 to 07 models
- Two-stage cooling capacity control on 08-14 models
- SEER up to 15.6
- EER up to 13.0
- IEER's up to 13.2 with single speed indoor fan motor and up to 14.5 with SAV™ (Staged Air Volume) 2-speed/VFD indoor fan motor system
- Exclusive non-corrosive composite condensate pan in accordance with ASHRAE 62 Standard, sloping design; side or center drain
- Single point electrical connection
- Pre-painted exterior panels and primer-coated interior panels tested to 500 hours salt spray protection
- TXV refrigerant metering system on each circuit
- Fully insulated cabinet
- Cooling operating range up to 125°F (52°C), and down to 35°F (2°C), 0°F (-18 °C) on 11 size standard
- Access panels with easy grip handles
- Innovative , easy starting, no-strip screw feature on unit access panels
- Two-inch disposable return air filters
- Tool-less filter access door
- Belt drive evaporator-fan motor and pulley combinations available on all three phase models
- Electric Drive X13 (5 speed/torque) motor on 04 to 06 models
- New terminal board facilitating simple safety circuit troubleshooting and simplified control box arrangement
- Field Convertible airflow (3-12.5 ton). Being able to convert a unit from vertical airflow to horizontal makes it easy to overcome job site complications. 12.5 ton models require a simple supply air duct cover to field convert from factory vertical to horizontal.
- Provisions for thru-the-bottom power entry capability as standard
- Full perimeter base rail with built-in rigging adapters and fork truck slots
- Scroll compressors with internal line-break overload protection
- 24-volt control circuit protected with resettable circuit breaker
- Permanently lubricated evaporator-fan motor
- Totally enclosed condenser motors with permanently lubricated bearings
- Low Pressure switch and high-pressure switch protection
- Liquid line filter drier on each circuit
- Factory-installed Humidi-MiZer® adaptive dehumidification system on all sizes, includes MotorMaster I controller.
- Standard Warranty: 5 years electric heater exchanger, 5 years compressor, 1 year parts
- Optional Staged Air Volume (SAV) system utilizes a Variable Frequency Drive (VFD) to automatically adjust the indoor fan motor speed between cooling stages. Available on 2-stage cooling models 08-14 with electromechanical, ComfortLink or RTU Open controls.

MODEL NUMBER NOMENCLATURE

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
5	0	H	C	-	D	0	8	A	3	A	5	-	0	A	0	A	0

Product Type

50 – Elect Heat Pkg. Rooftop

Model Series – WeatherMaster

HC – High Efficiency

Electric Heater Option

- – Standard (No Electric Heat)
- A – Low Electric Heat
- B – Medium Electric Heat
- C – High Electric Heat

Refrigerant System Options

- A – Single stage cooling models
- B – Single stg cooling w/Humidi–MiZer
- D – 2 stage Cooling
- E – 2 stg cooling w/Humidi–MiZer
- F – Single stg cool w/MotorMaster low amb cntl
- G – 2 stg cool w/Motormaster low amb cntl

Nominal Cooling Capacity (Tons)

- | | |
|--------------|------------------------|
| 04 – 3 ton | 09 – 8.5 ton |
| 05 – 4 ton | 11 – 10 ton (12.0 EER) |
| 06 – 5 ton | 12 – 10 ton (11.7 EER) |
| 07 – 6 ton | 14 – 12.5 ton |
| 08 – 7.5 ton | |

Sensor Options

- A – None
- B – RA Smoke Detector
- C – SA Smoke Detector
- D – RA + SA Smoke Detector
- E – CO₂ Sensor
- F – RA Smoke Detector + CO₂
- G – SA Smoke Detector + CO₂
- H – RA + SA Smoke Detector + CO₂

Indoor Fan Options 3, 4, 5 Ton Models Only*

- 0 – Electric (Direct) Drive X13 motor
- 2 – Medium Static Option – Belt Drive
- 3 – High Static Option – Belt Drive

Indoor Fan Options 6–12.5 Ton Models Only

- 1 – Standard Static Option – Belt Drive
- 2 – Medium Static Option – Belt Drive
- 3 – High Static Option – Belt Drive
- C – High Static Option w/Hi–Effy Motor – Belt Drive (14 size only)

Coil Options (RTPF) (Outdoor–Indoor–Hail Guard)

- A – Al/Cu – Al/Cu
- B – Pre–coat Al/Cu – Al/Cu
- C – E–coat Al/Cu – Al/Cu
- D – E–coat AL/Cu – E–coat AL/Cu
- E – Cu/Cu – Al/Cu
- F – Cu/Cu – Cu/Cu
- M – Al/Cu – Al/Cu – Louvered Hail Guard
- N – Pre–Coat Al/Cu – Al/Cu – Louvered Hail Guard
- P – E–Coat Al/Cu – Al/Cu Louvered Hail Guard
- Q – E–Coat Al/Cu – E–coat Al/Cu – Louvered Hail Guard
- R – Cu/Cu – Al/Cu – Louvered Hail Guard
- S – Cu/Cu – Cu/Cu – Louvered Hail Guard

* See Price Page details for specific Humidi–MiZer models

Packaging

- 0 – Standard
- 1 – LTL

Electrical Options

- A – None
- B – HACR breaker
- C – Non–fused disconnect
- D – Thru the base connections
- F – Non–fused disconnect & thru the base
- G – 2–speed indoor fan (VFD) controller
- J – 2–spd contr (VFD) & non–fused disc.
- K – 2–spd contr (VFD) & thru the base
- M – 2–spd cont (VFD) non–fused disc. & thru the base connections

Service Options

- 0 – None
- 1 – Un–powered Convenience Outlet
- 2 – Powered Convenience Outlet
- 3 – Hinged Panels
- 4 – Hinged Panels, un–powered C.O.
- 5 – Hinged Panels, powered C.O.
- C – Foil faced insulation

Intake / Exhaust Options

- A – None
- B – Temperature Economizer w/Barometric Relief
- F – Enthalpy Economizer w/Barometric Relief
- K – 2 position Damper
- U – Temp Ultra Low Leak Economizer w/Baro Relief
- W – Enthalpy Ultra Low Leak Econo w/Baro Relief

Base Unit Controls

- 0 – Base Electromechanical Controls. Can be used with W7212 EconoMi\$er IV (Non–Fault Detection and Diagnostic)
- 1 – PremierLink Controller
- 2 – RTU Open Multi–Protocol Controller
- 6 – Electromechanical Controls. Can be used with W7220 EconoMi\$er X (Non–Fault Detection and Diagnostic)
- D – ComfortLink Controls

Design Revision

- Factory Design Revision

Voltage

- 1 – 575/3/60
- 3 – 208–230/1/60
- 5 – 208–230/3/60
- 6 – 460/3/60

Note: On single phase (–3 voltage code) models, the following are not available as a factory installed option:

- Humidi–MiZer
- Coated Coils or CU Fin Coils
- Louvered Hail Guards
- Economizer or 2 Position Damper
- Powered 115 Volt Convenience Outlet

Not all possible options can be displayed above – see price pages or contact your Carrier Expert for more details

Table 1 – FACTORY-INSTALLED OPTIONS AND FIELD-INSTALLED ACCESSORIES

CATEGORY	ITEM	FACTORY INSTALLED OPTION	FIELD INSTALLED ACCESSORY
Cabinet	Thru-the-base electrical connections	X	X
	Hinged access panels	X	
	Supply duct cover – 14 size only		X
	Foil faced insulation throughout entire cabinet	X	
Coil Options	Cu/Cu indoor and/or outdoor coils ¹	X	
	Pre-coated outdoor coils ¹	X	
	Premium, E-coated outdoor coils ¹	X	
Humidity Control	Humidi-MiZer Adaptive Dehumidification System ¹	X	
Condenser Protection	Condenser coil hail guard (louvered design) ¹	X	
Controls	Thermostats, temperature sensors, and subbases		X
	PremierLink DDC communicating controller	X	X
	RTU Open Multi-Protocol Controller	X	
	ComfortLink Controls	X	
	Smoke detector (supply and/or return air)	X	
	Time Guard II compressor delay control circuit		X
	Phase Monitor		X
Economizers & Outdoor Air Dampers	EconoMi\$er IV for electro-mechanical controls – Non FDD (Standard air leak damper models) ^{1, 9}	X	X
	EconoMi\$er2 for DDC controls (Standard and Ultra Low Leak air damper models) ^{1, 10}	X	X
	Motorized 2 position outdoor-air damper ¹	X	X
	Manual outdoor-air damper (25% and 50%)	X	X
	Barometric relief ²	X	X
	Power exhaust – prop design		X
	EconoMi\$erX for electro-mechanical controls, complies with FDD. (Standard and Ultra Low Leak air damper models) ^{1, 9}	X	X
Economizer Sensors & IAQ Devices	Single dry bulb temperature sensors ³	X	X
	Differential dry bulb temperature sensors ³		X
	Single enthalpy sensors ³	X	X
	Differential enthalpy sensors ³		X
	CO ₂ sensor (wall, duct, or unit mounted) ³	X	X
Electric Heat	Electric Resistance Heaters	X	X
	Single Point Kit	X	X
Indoor Motor & Drive	Multiple motor and drive packages	X	
	Staged Air Vol (SAV) system w/VFD controller (2-stage cool only with electrical mechanical and RTU Open controls)	X	
	Display Kit for SAV system with VFD		X
Low Ambient Control	Winter start kit ⁴		X
	Motormaster head pressure controller to -20°F (-29°C) ⁴		X
Power Options	Cooling Low Ambient Controller to 0°F/-18°C (except 11 size) ⁴	X	
	Convenience outlet (powered) ^{1,5}	X	
	Convenience outlet (unpowered)	X	
	HACR circuit breaker ⁶	X	
Roof Curbs	Non-fused disconnect ^{7,8}	X	
	Roof curb 14-in (356mm)		X
	Roof curb 24-in (610mm)		X

NOTES:

- Not available as factory installed option on single phase (208/230/1/60) models. Use field installed accessory where available.
- Included with economizer.
- Sensors used to optimize economizer performance.
- See application data for assistance.
- Powered convenience outlet is not available on 11 size models with 460/3/60 or 575/3/60 voltage.
- HACR circuit breaker cannot be used when unit MOCP electrical rating exceeds:
 04-12 sizes – 208/230/1/60 and 208/230/3/60 = 100 amps, 460/3/60 = 90 amps, 575/3/60 = 70 amps.
 14 size – 208/230/3/60 = 200 amps, 460/3/60 = 90 amps, 575/3/60 = 80 amps.
 HACR circuit breaker on 575 volt can only be used on Wye power supply. Delta power supply is prohibited.
 Carrier RTUBuilder automatically selects the amp limitations.
- Non-fused disconnect switch (04-12 sizes) cannot be used when unit electrical rating exceeds:
 Without factory installed electric heat: 208/230/1/60 and 208/230/3/60 = 80 amps (FLA), 460/3/60 and 575/3/60 = 80 amps (FLA).
 With factory installed electric heat: 208/230/1/60 and 208/230/3/60 = 100 amps (FLA), 460/3/60 and 575/3/60 = 80 amps (FLA).
 Non-fused disconnect switch (14 size) cannot be used when unit electrical rating exceeds:
 Without factory installed electric heat: 208/230/3/60 = 115 amps (MCA), 460/3/60 and 575/3/60 = 100 amps (FLA).
 With factory installed electric heat: 208/230/2/60 = 200 amps (FLA), 460/3/60 and 575/3/60 = 100 amps (FLA)
 Carrier RTUBuilder automatically selects the amp limitations.
- If field installing electric heaters, Single Point Kits are required:
 On sizes 04, 05 and 06 – Single Point Kit CRSINGLE037A00 is required.
 On size 07 – Single Point Kit CRSINGLE042A00 is required.
 On sizes 08, 09 and 12 – Single Point Kit CRSINGLE047A00 is required.
- FDD – (Fault Detection and Diagnostic) capability per California Title 24 section 120.2.
- Models with ComfortLink and RTU Open DDC controls comply with California Title 24 Fault Detection and Diagnostic (FDD) PremierLink in non FDD

FACTORY OPTIONS AND/OR ACCESSORIES

Economizer (dry-bulb or enthalpy)

Economizers save energy, money and improve comfort levels in the conditioned space. They bring in fresh, outside air for ventilation; and provide cool outside air to cool your building. This also is the preferred method of low ambient cooling. When integrated with CO₂ sensors, economizers can provide even more savings by coupling the ventilation air to only that amount required based on space occupancy. Economizers are available, installed and tested by the factory, with either enthalpy or temperature dry-bulb inputs. There are also models for electromechanical, direct digital controllers and single speed fan or 2-speed indoor fan motors. Additional sensors are available as accessories to optimize the economizer. Economizers include gravity controlled barometric relief that helps equalize building pressure and ambient air pressures. This can be a cost effective solution to prevent building pressurization. Economizers are available in Ultra Low Leak and standard low leak versions.

CO₂ Sensor

Improves productivity and saves money by working with the economizer to intake only the correct amount of outside air for ventilation. As occupants fill your building, the CO₂ sensor detects their presence through increasing CO₂ levels, and opens the economizer appropriately.

When the occupants leave, the CO₂ levels decrease, and the sensor appropriately closes the economizer. This intelligent control of the ventilation air, called Demand Control Ventilation (DCV) reduces the overall load on the rooftop, saving money.

Smoke Detectors

Trust the experts. Smoke detectors make your application safer and your job easier. Carrier smoke detectors immediately shut down the rooftop unit when smoke is detected. They are available, installed by the factory, for supply air, return air, or both.

Louvered Hail Guards

Sleek, louvered panels protect the condenser coil from hail damage, foreign objects, and incidental contact.

Convenience Outlet (powered or un-powered)

Reduce service and/or installation costs by including a convenience outlet in your specification. Carrier will install this service feature at our factory. Provides a convenient, 15 amp, 115v GFCI receptacle with “Wet in Use” cover. The “powered” option allows the installer to power the outlet from the line side of the disconnect or load side as required by code. The “unpowered” option is to be powered from a separate 115/120v power source. Non-fused Disconnect

This OSHA-compliant, factory-installed, safety switch allows a service technician to locally secure power to the rooftop.

If field installing electric heat with factory-installed non-fused disconnect switch, a Single Point Kit is required. See details on page 5, Note 8.

Power Exhaust

Superior internal building pressure control. This field-installed accessory may eliminate the need for costly, external pressure control fans.

PremierLink

This CCN controller regulates your rooftop’s performance to tighter tolerances and expanded limits, as well as facilitates zoning systems and digital accessories. It also unites your Carrier HVAC equipment together on one, coherent CCN network. The PremierLink can be factory-installed, or easily field-installed.

RTU Open, Multi-protocol Controller

Connect the rooftop to an existing BAS without needing complicated translators or adapter modules using the RTU Open controller. This new controller speaks the 4 most common building automation system languages (Bacnet, Modbus, N2, and Lonworks). Use this controller when you have an existing BAS. Besides the 4 protocols, it also communicates with a Carrier Open system (I-Vu and VVT).

Time Guard II Control Circuit

This accessory protects your compressor by preventing short-cycling in the event of some other failure, prevents the compressor from restarting for 30 seconds after stopping. Not required with PremierLink, RTU-Open, or authorized commercial thermostats.

Motorized 2-Position Damper

The new Carrier 2-position, motorized outdoor air damper admits up to 100% outside air. Using reliable, gear-driven technology, the 2-position damper opens to allow ventilation air and closes when the rooftop stops, stopping unwanted infiltration. Not available with Staged Air Volume (SAV) models.

Manual OA Damper

Manual outdoor air dampers are an economical way to bring in ventilation air. The dampers are available in 25% and 50% versions. Not available with Staged Air Volume (SAV) models.

Optional Humidi-MiZer Adaptive Dehumidification System

Carrier’s Humidi-MiZer adaptive dehumidification system is an all-inclusive factory installed option that can be ordered with any WeatherMaster 50HC04-14 rooftop unit. This system expands the envelope of operation of Carrier’s WeatherMaster rooftop products to provide unprecedented flexibility to meet year round comfort conditions.

FACTORY OPTIONS AND/OR ACCESSORIES (cont.)

Optional Humidi-MiZer Adaptive Dehumidification System (cont.)

The Humidi-MiZer adaptive dehumidification system has the industry's only dual dehumidification mode setting. The Humidi-MiZer system includes two new modes of operation.

The WeatherMaster 50HC04-14 rooftop coupled with the Humidi-MiZer system is capable of operating in normal design cooling mode, subcooling mode, and hot gas reheat mode. Normal design cooling mode is when the unit will operate under its normal sequence of operation by cycling compressors to maintain comfort conditions.

Subcooling mode will operate to satisfy part load type conditions when the space requires combined sensible and a higher proportion of latent load control. Hot Gas Reheat mode will operate when outdoor temperatures diminish and the need for latent capacity is required for sole humidity control. Hot Gas Reheat mode will provide neutral air for maximum dehumidification operation.

Staged Air Volume (SAV) Indoor Fan Speed System

Carrier's Staged Air Volume (SAV) system saves energy and installation time by utilizing a Variable Frequency Drive (VFD) to automatically adjust the indoor fan motor speed in sequence with the units cooling operation. Per ASHRAE 90.1 standard section 6.4.3.10.b, during the first stage of cooling operation the VFD will adjust the fan motor to provide 2/3rd of the total cfm established for the unit. When a call for the second stage of cooling is required, the VFD will allow the total cfm for the unit established (100%). During the heating mode the VFD will allow total design cfm (100%) operation and during the ventilation mode the VFD will allow operation to 2/3rd of total cfm.

Compared to single speed indoor fan motor systems, Carrier's SAV system can save substantial energy, 25%+*, versus single speed indoor fan motor systems.

The VFD used in Carrier's SAV system has soft start capabilities to slowly ramp up the speeds, thus eliminating any high inrush air volume during initial start-up. It also has internal over current protection for the fan motor and a field installed display kit that allows adjustment and in depth diagnostics of the VFD.

This SAV system is available on models with 2-stage cooling operation with electrical mechanical or RTU Open, Multi Protocol controls. Both space sensor and conventional thermostats controls can be used to provide accurate control in any application.

The SAV system is very flexible for initial fan performance set up and adjustment. The standard factory shipped VFD is pre-programmed to automatically stage the fan speed between the first and second stage of cooling. The unit fan performance static pressure and cfm can be easily adjusted using the traditional means of pulley adjustments. The other means to adjust the unit

static and cfm performance is to utilize the field installed Display Kit and adjust the frequency and voltage in the VFD to required performance requirements. In either case, once set up, the VFD will automatically adjust the speed between the cooling stage operations.

*Data based on .10 (\$/kWh) in an office application utilizing Carrier's HAP 4.6 simulation software program

Hinged Access Panels

Allows access to unit's major components with specifically designed hinged access panels. Panels are: filter, control box, fan motor and compressor.

MotorMaster Head Pressure Controller

The Motormaster motor controller is a low ambient, head pressure controller kit that is designed to maintain the unit's condenser head pressure during periods of low ambient cooling operation. This device should be used as an alternative to economizer free cooling not when economizer usage is either not appropriate or desired. The MotorMaster will either cycle the outdoor-fan motors or operate them at reduced speed to maintain the unit operation, depending on the model.

MotorMaster allows cooling operation down to -20°F (-29°C) ambient conditions.

Winter Start Kit

The winter start kit by Carrier extends the low ambient limit of your rooftop to 25°F (-4°C). The kit bypasses the low pressure switch, preventing nuisance tripping of the low pressure switch. Other low ambient precautions may still be prudent.

Alternate Motors and Drives

Some applications need larger horsepower motors, some need more airflow, and some need both. Regardless of the case, your Carrier expert has a factory installed combination to meet your application. A wide selection of motors and pulleys (drives) are available, factory installed, to handle nearly any application.

Thru-the-Base Connections

Thru-the-base connections, available as either an accessory or as a factory option, are necessary to ensure proper connection and seal when routing wire and piping through the rooftop's basepan and curb. These couplings eliminate roof penetration and should be considered for gas lines, main power lines, as well as control power.

Electric Heaters

Carrier offers a full-line of field-installed accessory heaters. The heaters are very easy to use, install and are all pre-engineered and certified.

FACTORY OPTIONS AND/OR ACCESSORIES (cont.)

ComfortLink Controls

Models with the optional Carrier ComfortLink Controls allow added unit diagnostics and operation setup capabilities, as well as controlling logic for single zone Variable Air Volume (VAV) applications.

The ComfortLink control is your link to a world of simple and easy to use rooftop units that offer outstanding performance and value. It optimizes the performance of the refrigeration circuits as conditions change, resulting in the following features:

- Better control of temperature and humidity
- Superior reliability
- Automatic redundancy
- Low ambient cooling operation to 0°F
- More accurate diagnostics, at unit or remote

The ComfortLink Scrolling Marquee is very easy to use. The messages are displayed in easy to understand English, no decoding is required. A scrolling readout provides detailed explanations of control information. Only four, large, easy-to-use buttons are required to maneuver through the entire menu. The readout is designed to be visible even in the brightest sunlight. A handheld Navigator accessory or wall-mounted System Pilot™ accessory can be used for added service flexibility.

The ComfortLink control provides unparalleled service diagnostic information. Temperature and pressure can be read directly from the display with no need for separate gauges. Other data, such as compressor cycles, unit run time hours, current alarms, can also be accessed. A history of alarms is also available for viewing.

The service run test can be very helpful when troubleshooting. The user can run test major components to determine the root cause of a problem. The unit can be run-tested before an installation is complete to ensure satisfactory start-up. To ensure reliability, the ComfortLink control prevents reverse compressor rotation. No laptop computers are required for start-up.

Time schedules are built in and the Scrolling Marquee display provides easy access to setpoints. The ComfortLink control accepts input from a CO₂ sensor and a smoke detector. Both are available as factory installed options or as field installed accessories.

HACR Breaker

These manual reset devices provide overload and short circuit protection for the unit. Factory wired and mounted with the units with access cover to help provide environment protection.

On 575V applications, HACR breaker can only be used with WYE power distribution systems. Use on Delta power distribution systems is prohibited.

Foil Faced Insulated Cabinet

Cabinet is fully insulated with non-fibrous, foil faced cleanable insulation that is mechanically secured and encapsulated in unit design.

Low Ambient Controller

The low ambient controller is a head pressure controller kit that is designed to maintain the unit's condenser head pressure during periods of low ambient cooling operation. This device should be used as an alternative to economizer free cooling not when economizer usage is either not appropriate or desired. The low ambient controller will either cycle the outdoor fan motors or operate them at reduced speed to maintain the unit operation, depending on the model. This controller allows cooling operation down to 0°F (-18°C) ambient conditions. (Not available on 11 size models as standard unit cooling operation down to 0°F /-18°C.)

Table 2 – AHRI COOLING RATING TABLE 1-STAGE COOLING

UNIT	COOLING STAGES	NOM. CAPACITY (TONS)	NET COOLING CAPACITY (MBH)	TOTAL POWER (kW)	SEER	EER	IEER
A04	1	3	36.0	2.9	15.00	12.50	–
A05	1	4	48.5	3.7	15.60	13.00	–
A06	1	5	57.5	4.6	15.20	12.50	–
A07	1	6	73.0	6.0	–	12.20	13.20

Table 3 – AHRI COOLING RATING TABLE 2-STAGE COOLING

UNIT	COOLING STAGES	NOM. CAPACITY (TONS)	NET COOLING CAPACITY (MBH)	TOTAL POWER (kW)	EER	IEER WITH SINGLE SPEED INDOOR FAN MOTOR	IEER WITH 2-SPEED INDOOR MOTOR
D08	2	7.5	89.0	7.3	12.20	13.20	14.0
D09	2	8.5	97.0	8.0	12.20	13.20	14.0
D11	2	10.0	111.0	9.3	12.00	12.60	14.5
D12	2	10.0	115.0	9.8	11.70	12.20	12.6
D14	2	12.5	146.0	11.8	12.40	13.20	14.1

LEGEND

- AHRI – Air Conditioning, Heating and Refrigeration Institute Test Standard
- ASHRAE – American Society of Heating, Refrigerating and Air Conditioning, Inc.
- EER – Energy Efficiency Ratio
- IEER – Integrated Energy Efficiency Ratio
- SEER – Seasonal Energy Efficiency Ratio



Use of the AHRI Certified TM Mark indicates a manufacturer's participation in the program. For verification of certification for individual products, go to www.ahridirectory.org.



NOTES:

- Rated in accordance with AHRI Standards 210/240 (04–06 size) and 340/360 (07–14 size).
- Ratings are based on:
Cooling Standard: 80°F (27°C) db, 67°F (19°C) wb indoor air temp and 95°F (35°C) db outdoor air temp.
IEER Standard: A measure that expresses cooling part-load EER efficiency for commercial unitary air-conditioning and heat pump equipment on the basis of weighted operation at various load capacities.
- All 50HC units comply with ASHRAE 90.1 and Energy Star Energy Standard for minimum SEER and EER requirements.
- 50HC units comply with US Energy Policy Act (2005). To evaluate code compliance requirements, refer to state and local codes.

Table 4 – MINIMUM - MAXIMUM AIRFLOWS ELECTRIC HEAT

UNIT	COOLING			ELECTRIC HEATERS		
	Minimum Single Speed Fan Motor	Minimum 2-speed Fan Motor (at high speed)	Minimum 2-speed Fan Motor (at low speed)	Maximum	Minimum	Maximum
50HC**04	900	–	–	1500	900	1500
50HC**05	1200	–	–	2000	1200	2000
50HC**06	1500	–	–	2500	1500	2500
50HC**07	1800	–	–	3000	1800	3000
50HC**08	2250	2535	1673	3750	2250	3750
50HC**09	2550	2550	1683	4250	2250	4250
50HC**11	3000	3380	2231	5000	3000	5000
50HC**12	3000	3380	2231	5000	3000	5000
50HC**14	3750	4225	2789	6250	3750	6250

– Not available

Table 5 – SOUND PERFORMANCE TABLE

UNIT	COOLING STAGES	OUTDOOR SOUND (dB) AT 60								
		A-WEIGHTED	63	125	250	500	1000	2000	4000	8000
A04	1	76	78.2	78.0	74.2	73.3	70.6	66.0	62.4	56.9
A05	1	78	84.7	83.6	77.1	74.6	72.3	68.3	64.7	60.9
A06	1	77	87.5	82.5	76.1	73.6	71.3	67.1	64.1	60.0
A07	1	82	90.1	82.6	81.0	79.4	77.0	73.0	70.4	66.7
D08	2	82	90.6	84.3	80.2	79.3	77.1	72.2	67.4	63.7
D09	2	82	88.6	85.0	81.6	79.5	77.4	74.1	71.0	66.3
D11	2	87	85.9	87.9	85.6	84.4	82.8	78.5	74.9	72.5
D12	2	87	85.9	87.9	85.6	84.4	82.8	78.5	74.9	72.5
D14	2	83	89.3	86.0	82.9	80.7	78.5	73.6	69.6	64.5

LEGEND: dB – Decibel**NOTES:**

1. Outdoor sound data is measure in accordance with AHRI.
2. Measurements are expressed in terms of sound power. Do not compare these values to sound pressure values because sound pressure depends on specific environmental factors which normally do not match individual applications. Sound power values are independent of the environment and therefore more accurate.
3. A-weighted sound ratings filter out very high and very low frequencies, to better approximate the response of "average" human ear. A-weighted measurements for Carrier units are taken in accordance with AHRI.

Table 6 – PHYSICAL DATA

(COOLING)

3 - 6 TONS

		50HC*04	50HC*05	50HC*06	50HC*07
Refrigeration System					
	# Circuits / # Comp. / Type	1 / 1 / Scroll	1 / 1 / Scroll	1 / 1 / Scroll	1 / 1 / Scroll
	Puron® refrig. (R-410A) charge (lbs-oz)	9 - 0	12 - 8	13 - 3	14 - 0
	Humidi-MiZer Puron refrig. (R-410A) charge (lbs-oz)	11 - 0	19 - 12	20 - 0	22 - 8
	Metering Device	TXV	TXV	TXV	TXV
	High-press. Trip / Reset (psig)	630 / 505	630 / 505	630 / 505	630 / 505
	Low-press. Trip / Reset (psig)	54 / 117	54 / 117	54 / 117	54 / 117
	Compressor Capacity Staging (%)	100%	100%	100%	100%
Evaporator Coil					
	Material (Tube Fin)	Cu / Al	Cu / Al	Cu / Al	Cu / Al
	Coil type	3/8-in RTPF	3/8-in RTPF	3/8-in RTPF	3/8-in RTPF
	Rows / FPI	3 / 15	3 / 15	4 / 15	3 / 15
	Total Face Area (ft ²)	5.5	7.3	7.3	8.9
	Condensate Drain Conn. Size	3/4-in	3/4-in	3/4-in	3/4-in
Humidi-MiZer Coil					
	Material (Tube Fin)	Cu / Al	Cu / Al	Cu / Al	Cu / Al
	Coil type	3/8-in RTPF	3/8-in RTPF	3/8-in RTPF	3/8-in RTPF
	Rows / FPI	1 / 17	2 / 17	2 / 17	2 / 17
	Total Face Area (ft ²)	3.9	5.2	5.2	5.2
Evaporator Fan and Motor					
Standard Static 1 phase	Motor Qty / Drive Type	1 / Direct	1 / Direct	1 / Direct	-
	Max BHP	1.0	1.0	1.0	-
	RPM Range	600-1200	600-1200	600-1200	-
	Motor Frame Size	48	48	48	-
	Fan Qty / Type	1 / Centrifugal	1 / Centrifugal	1 / Centrifugal	-
	Fan Diameter (in)	10 x 10	10 x 10	10 x 10	-
Standard Static 3 phase	Motor Qty / Drive Type	1 / Direct	1 / Direct	1 / Direct	1 / Belt
	Max BHP	1.0	1.0	1.0	1.7
	RPM Range	600-1200	600-1200	600-1200	489-747
	Motor Frame Size	48	48	48	56
	Fan Qty / Type	1 / Centrifugal	1 / Centrifugal	1 / Centrifugal	1 / Centrifugal
	Fan Diameter (in)	10 x 10	10 x 10	11 x 10	15 x 15
Standard Static 3 phase*	Motor Qty / Drive Type	1 / Belt	1 / Belt	1 / Belt	1 / Belt
	Max BHP	1.7	1.7	1.7	1.7
	RPM Range	560-854	560-854	770-1175	489-747
	Motor Frame Size	48	48	48	56
	Fan Qty / Type	1 / Centrifugal	1 / Centrifugal	1 / Centrifugal	1 / Centrifugal
	Fan Diameter (in)	10 x 10	10 x 10	10 x 10	15 x 15

* Humidi-MiZer models only

- Not applicable

Table 6 (cont.) - PHYSICAL DATA

(COOLING)

3 - 6 TONS

		50HC*04	50HC*05	50HC*06	50HC*07
Evaporator Fan and Motor					
Medium Static 3 phase	Motor Qty / Drive Type	1 / Belt	1 / Belt	1 / Belt	1 / Belt
	Max BHP	1.7	1.7	2.4	2.9
	RPM Range	770-1175	920-1303	1035-1466	733-949
	Motor Frame Size	48	56	56	56
	Fan Qty / Type	1 / Centrifugal	1 / Centrifugal	1 / Centrifugal	1 / Centrifugal
	Fan Diameter (in)	10 x 10	10 x 10	10 x 10	15 x 15
Medium Static 3 phase*	Motor Qty / Drive Type	1 / Belt	1 / Belt	1 / Belt	-
	Max BHP	1.7	1.7	2.4	-
	RPM Range	770-1175	770-1175	1035-1466	-
	Motor Frame Size	48	48	56	-
	Fan Qty / Type	1 / Centrifugal	1 / Centrifugal	1 / Centrifugal	-
	Fan Diameter (in)	10 x 10	10 x 10	10 x 10	-
High Static 3 phase	Motor Qty / Drive Type	1 / Belt	1 / Belt	1 / Belt	1 / Belt
	Max BHP	2.4	2.9	2.9	4.7
	RPM Range	1035-1466	1208-1639	1303-1687	909-1102
	Motor Frame Size	56	56	56	14
	Fan Qty / Type	1 / Centrifugal	1 / Centrifugal	1 / Centrifugal	1 / Centrifugal
	Fan Diameter (in)	10 x 10	10 x 10	10 x 10	15 x 15
Cond. Coil					
	Material (Tube/Fin)	Cu / Al	Cu / Al	Cu / Al	Cu / Al
	Coil type	3/8-in RTPF	3/8-in RTPF	3/8-in RTPF	3/8-in RTPF
	Rows / FPI	2 / 17	2 / 17	2 / 17	2 / 17
	Total Face Area (ft ²)	12.7	21.3	21.3	20.5
Cond. fan / motor					
	Qty / Motor Drive Type	1/ Direct	1/ Direct	1/ Direct	2/ Direct
	Motor HP / RPM	1/8 / 825	1/4 / 1100	1/4 / 1100	1/4 / 1100
	Fan diameter (in)	22	22	22	22
Filters					
	RA Filter # / Size (in)	2 / 16 x 25 x 2	4 / 16 x 16 x 2	4 / 16 x 16 x 2	4 / 16 x 20 x 2
	OA inlet screen # / Size (in)	1 / 20 x 24 x 1	1 / 20 x 24 x 1	1 / 20 x 24 x 1	1 / 20 x 36 x 1

* Humidi-MiZer models only

- Not applicable

Table 7 – PHYSICAL DATA

(COOLING)

7.5 - 12.5 TONS

		50HC*08	50HC*09	50HC*11	50HC*12	50HC*14
Refrigeration System						
# Circuits / # Comp. / Type		2 / 2 / Scroll	2 / 2 / Scroll	2 / 2 / Scroll	2 / 2 / Scroll	2 / 2 / Scroll
Puron Refrig (R-410A) charge A/B (lbs-oz)		9 – 10 / 9 – 10	9 – 14 / 9 – 14	12 – 10 / 13 – 0	12 – 11 / 12 – 5	16 – 7 / 15 – 5
Humidi-MiZer Puron Refrig (R-410A) charge A/B (lbs-oz)		17-0 / 17-0	15-2 / 15-0	18-0 / 18-0	18-3 / 17-3	25-8 / 22-8
Metering device		TXV	TXV	TXV	TXV	TXV
High-press. Trip / Reset (psig)		630 / 505	630 / 505	630 / 505	630 / 505	630 / 505
Low-press. Trip / Reset (psig)		54 / 117	54 / 117	27 / 44	54 / 117	54 / 117
Compressor Capacity Staging (%)		50% / 100%	50% / 100%	50% / 100%	50% / 100%	50% / 100%
Evaporator Coil						
Material (Tube/Fin)		Cu / Al	Cu / Al	Cu / Al	Cu / Al	Cu / Al
Coil type		3/8-in RTPPF	3/8-in RTPPF	3/8-in RTPPF	3/8-in RTPPF	3/8-in RTPPF
Rows / FPI		4 / 15	4 / 15	4 / 15	4 / 15	4 / 15
total face area (ft ²)		11.1	11.1	11.1	11.1	17.5
Condensate drain conn. size		3/4-in	3/4-in	3/4-in	3/4-in	3/4-in
Humidi-MiZer Coil						
Material (Tube/Fin)		Cu / Al	Cu / Al	Cu / Al	Cu / Al	Cu / Al
Coil type		3/8-in RTPPF	3/8-in RTPPF	3/8-in RTPPF	3/8-in RTPPF	3/8-in RTPPF
Rows / FPI		2 / 17	2 / 17	2 / 17	2 / 17	1 / 17
total face area (ft ²)		6.3	8.4	8.6	8.6	13.8
Evaporator fan and motor						
Standard Static 3 phase	Motor Qty / Drive type	1 / Belt	1 / Belt	1 / Belt	1 / Belt	1 / Belt
	Max BHP	1.7	1.7	2.4	2.4	2.9
	RPM range	518-733	518-733	591-838	591-838	440-609
	Motor Frame Size	56	56	56	56	56Y
	Fan Qty / Type	1 / Centrifugal	1 / Centrifugal	1 / Centrifugal	1 / Centrifugal	1 / Centrifugal
	Fan Diameter (in)	15 x 15	15 x 15	15 x 15	15 x 15	18 x 18
Medium Static 3 phase	Motor Qty / Drive type	1 / Belt	1 / Belt	1 / Belt	1 / Belt	1 / Belt
	Max BHP	2.4	2.4	3.7	3.7	3.7
	RPM range	690-936	690-936	838-1084	838-1084	609-778
	Motor Frame Size	56	56	56HZ	56HZ	56HZ
	Fan Qty / Type	1 / Centrifugal	1 / Centrifugal	1 / Centrifugal	1 / Centrifugal	1 / Centrifugal
	Fan Diameter (in)	15 x 15	15 x 15	15 x 15	15 x 15	18 x 18
High Static 3 phase	Motor Qty / Drive type	1 / Belt	1 / Belt	1 / Belt	1 / Belt	1 / Belt
	Max BHP	3.7	3.7	4.9	4.9	6.1
	RPM range	838-1084	838-1084	1022-1240	1022-1240	776-955
	Motor Frame Size	56	56	145TY	145TY	S184T
	Fan Qty / Type	1 / Centrifugal	1 / Centrifugal	1 / Centrifugal	1 / Centrifugal	1 / Centrifugal
	Fan Diameter (in)	15 x 15	15 x 15	15 x 15	15 x 15	18 x 18
Condenser Coil						
Material (Tube/Fin)		Cu / Al	Cu / Al	Cu / Al	Cu / Al	Cu / Al
Coil type		3/8-in RTPPF	3/8-in RTPPF	3/8-in RTPPF	3/8-in RTPPF	3/8-in RTPPF
Rows / FPI		2 / 17	2 / 17	3 / 17	3 / 17	2 / 17
Total Face Area (ft ²)		25.1	25.1	25.1	25.1	2 at 23.1
Condenser fan / motor						
Qty / Motor drive type		2 / direct	2 / direct	1 / direct ECM	1 / direct	3 / direct
Motor HP / RPM		1/4 / 1100	1/4 / 1100	1 / 1050	1 / 1175	1/4 / 1100
Fan diameter (in)		22	22	30	30	22
Filters						
RA Filter # / size (in)		4 / 20 x 20 x 2	4 / 20 x 20 x 2	4 / 20 x 20 x 2	4 / 20 x 20 x 2	6 / 18 x 24 x 2 Vert 2/24 x 27 x 1
OA inlet screen # / size (in)		1 / 20 x 24 x 1	1 / 20 x 24 x 1	1 / 20 x 24 x 1	1 / 20 x 24 x 1	Horz 1/30 x 39 x 1

CURBS & WEIGHTS DIMENSIONS - 50HC 04-06

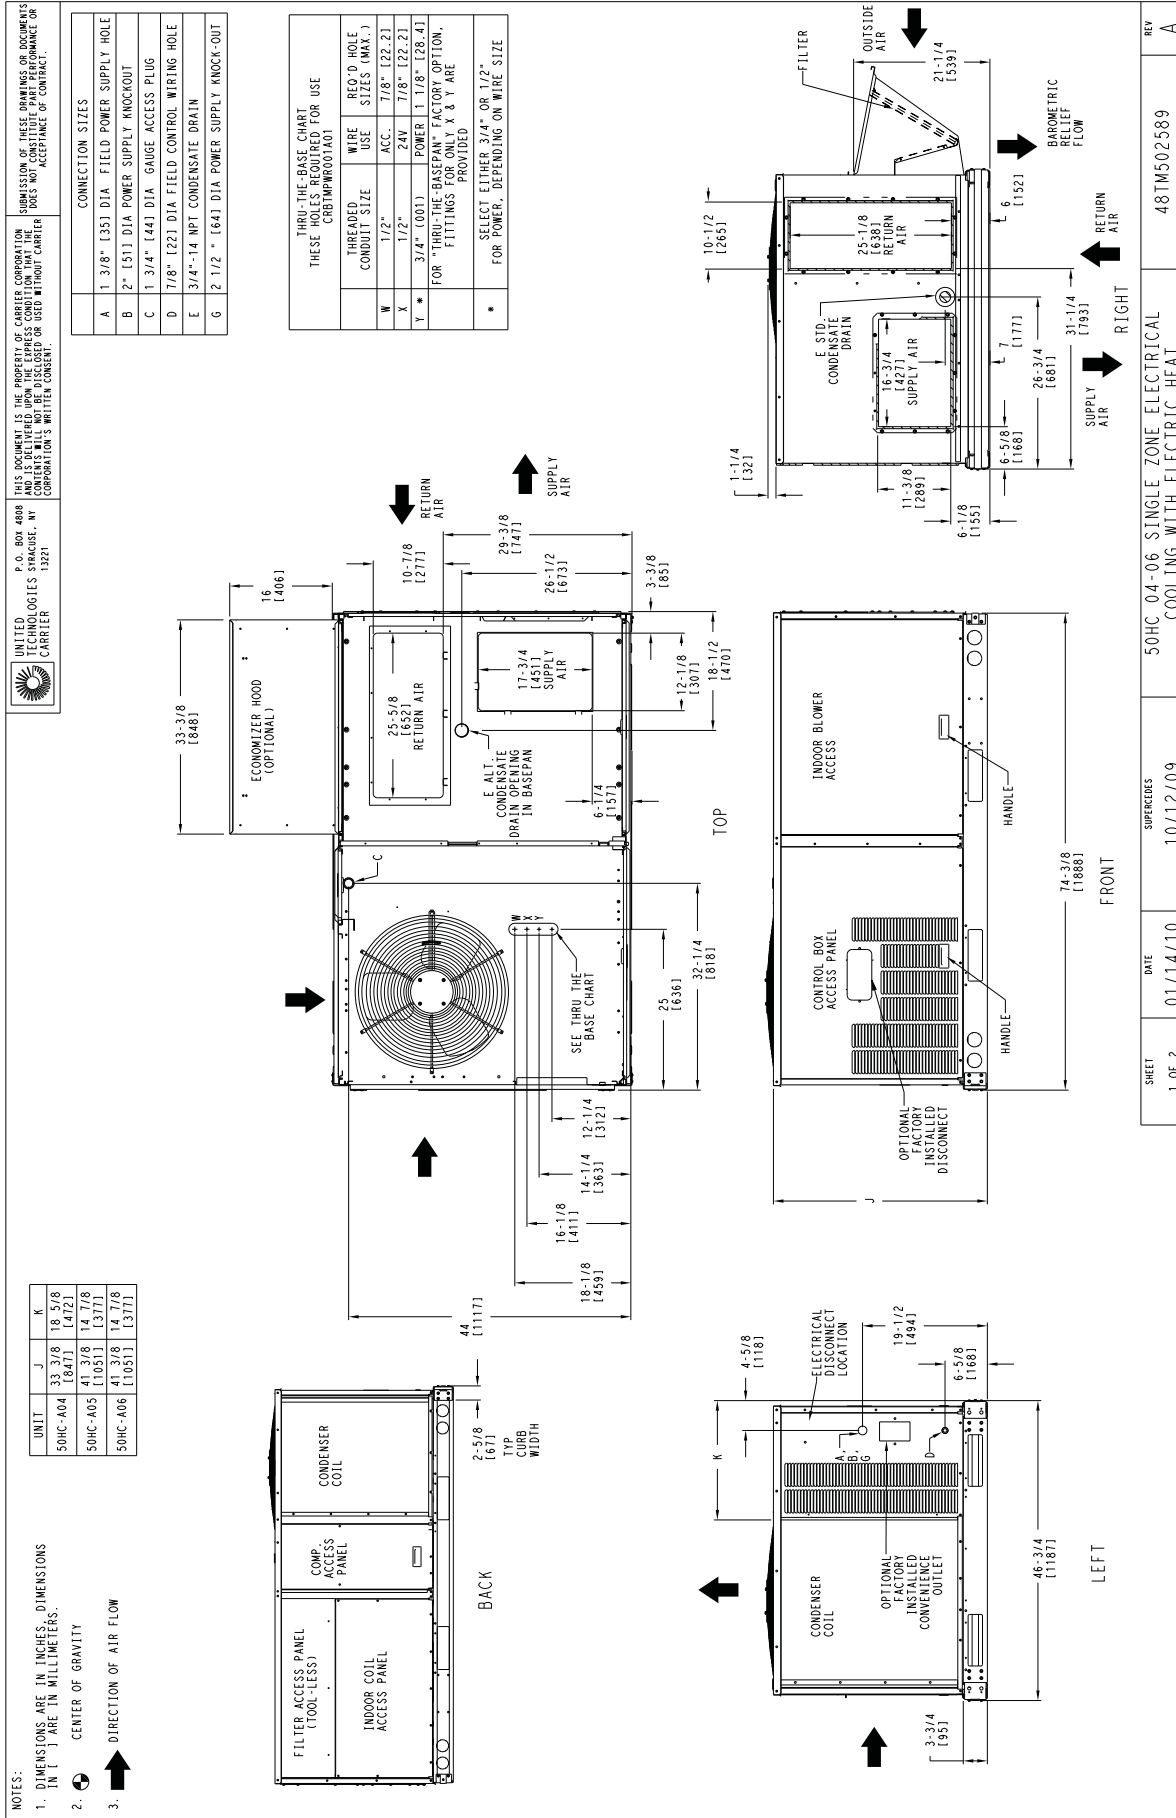


Fig. 1 - Dimensions 50HC 04-06

CURBS & WEIGHTS DIMENSIONS - 50HC 04-06 (cont.)

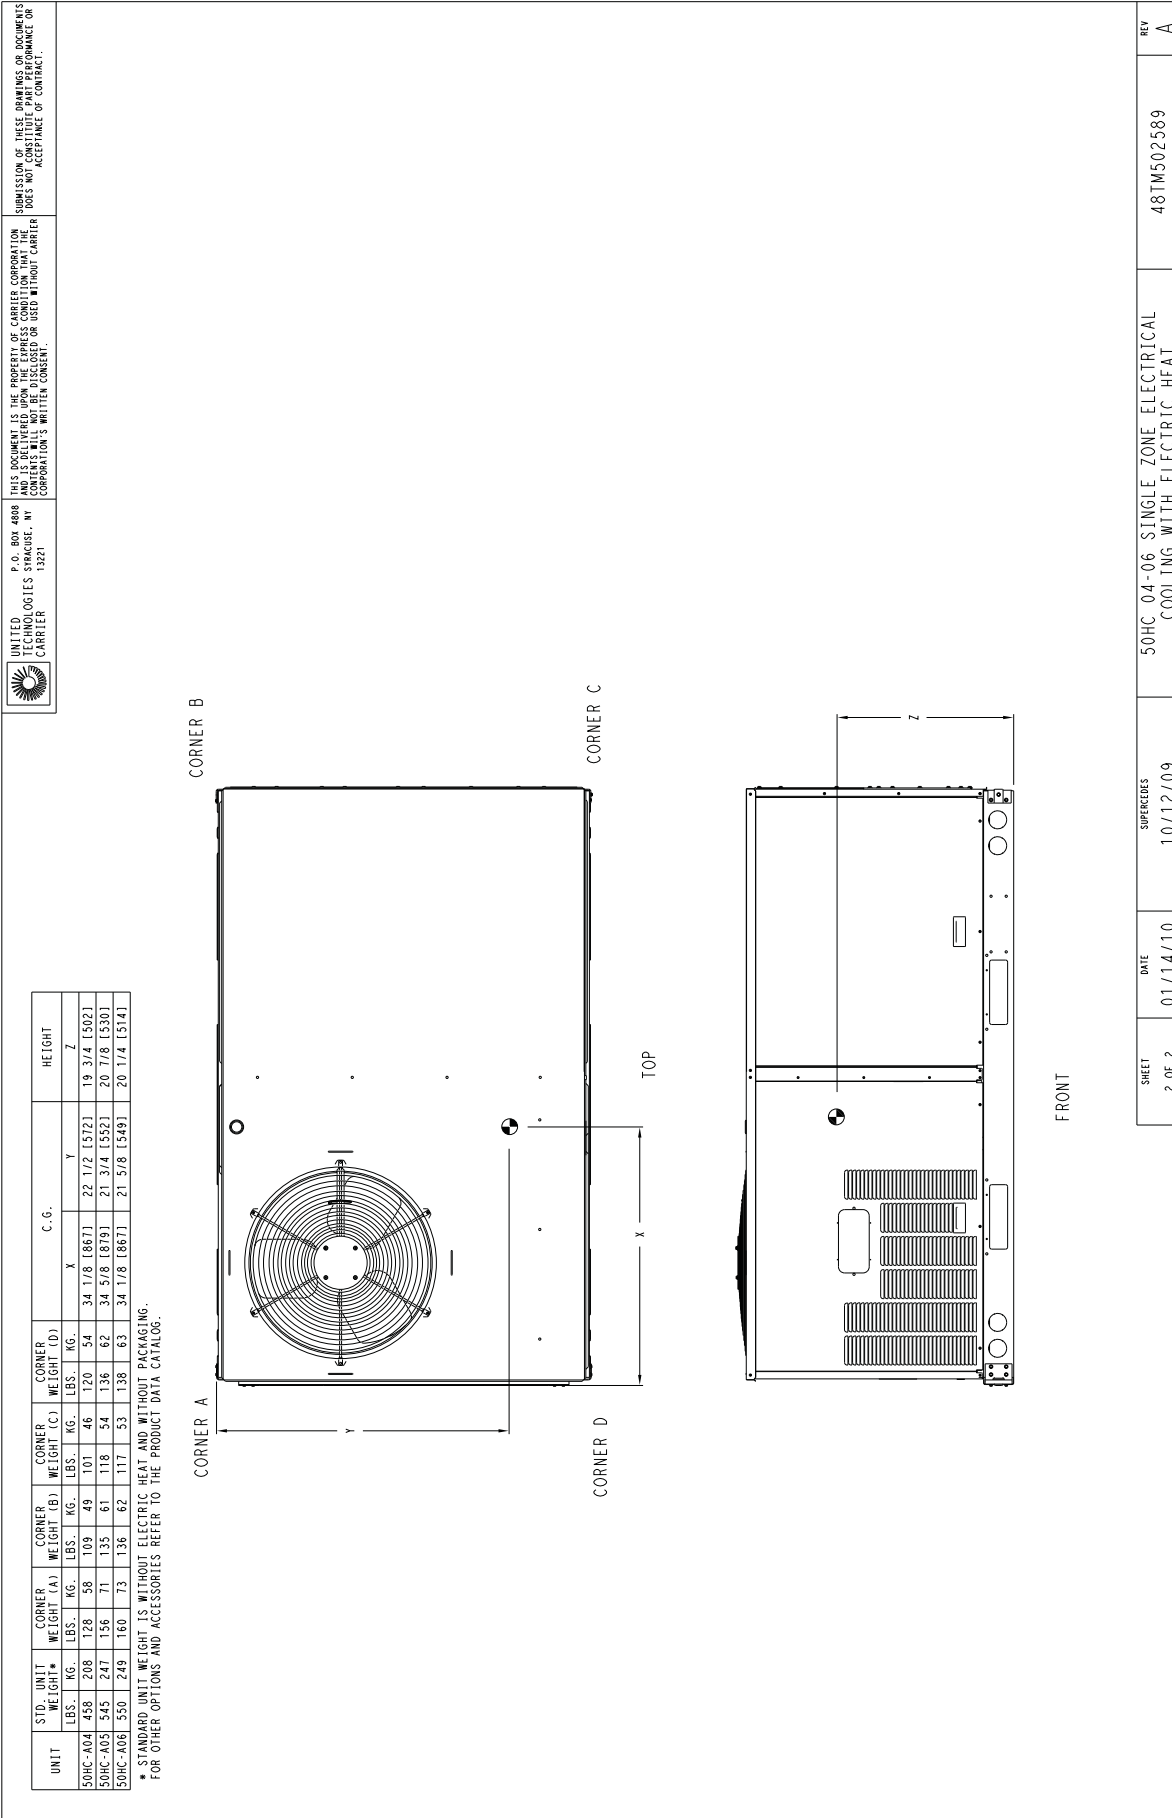


Fig. 2 - Dimensions 50HC 04-06

CURBS & WEIGHTS DIMENSIONS - 50HC 04-06 (cont.)

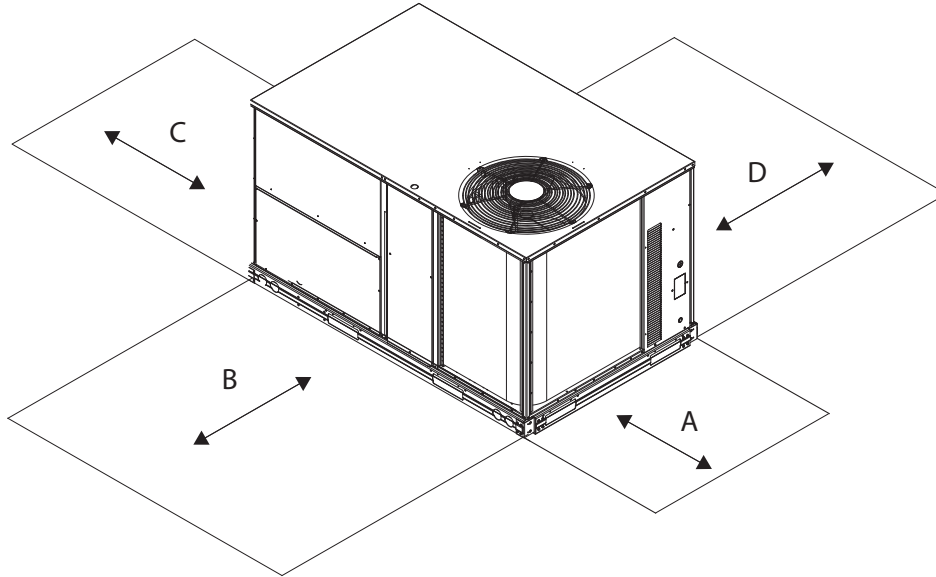


Fig. 3 - Service Clearance

C08337

LOC	DIMENSION	CONDITION
A	48-in (1219 mm) 18-in (457 mm) 18-in (457 mm) 12-in (305 mm)	Unit disconnect is mounted on panel No disconnect, convenience outlet option Recommended service clearance Minimum clearance
B	42-in (1067 mm) 36-in (914 mm) Special	Surface behind servicer is grounded (e.g., metal, masonry wall) Surface behind servicer is electrically non-conductive (e.g., wood, fiberglass) Check for sources of flue products within 10-ft of unit fresh air intake hood
C	36-in (914 mm) 18-in (457 mm)	Side condensate drain is used Minimum clearance
D	42-in (1067 mm) 36-in (914 mm)	Surface behind servicer is grounded (e.g., metal, masonry wall, another unit) Surface behind servicer is electrically non-conductive (e.g., wood, fiberglass)

NOTE: Unit not designed to have overhead obstruction. Contact Application Engineering for guidance on any application planning overhead obstruction or for vertical clearances.

CURBS & WEIGHTS DIMENSIONS - 50HC 04-06 (cont.)

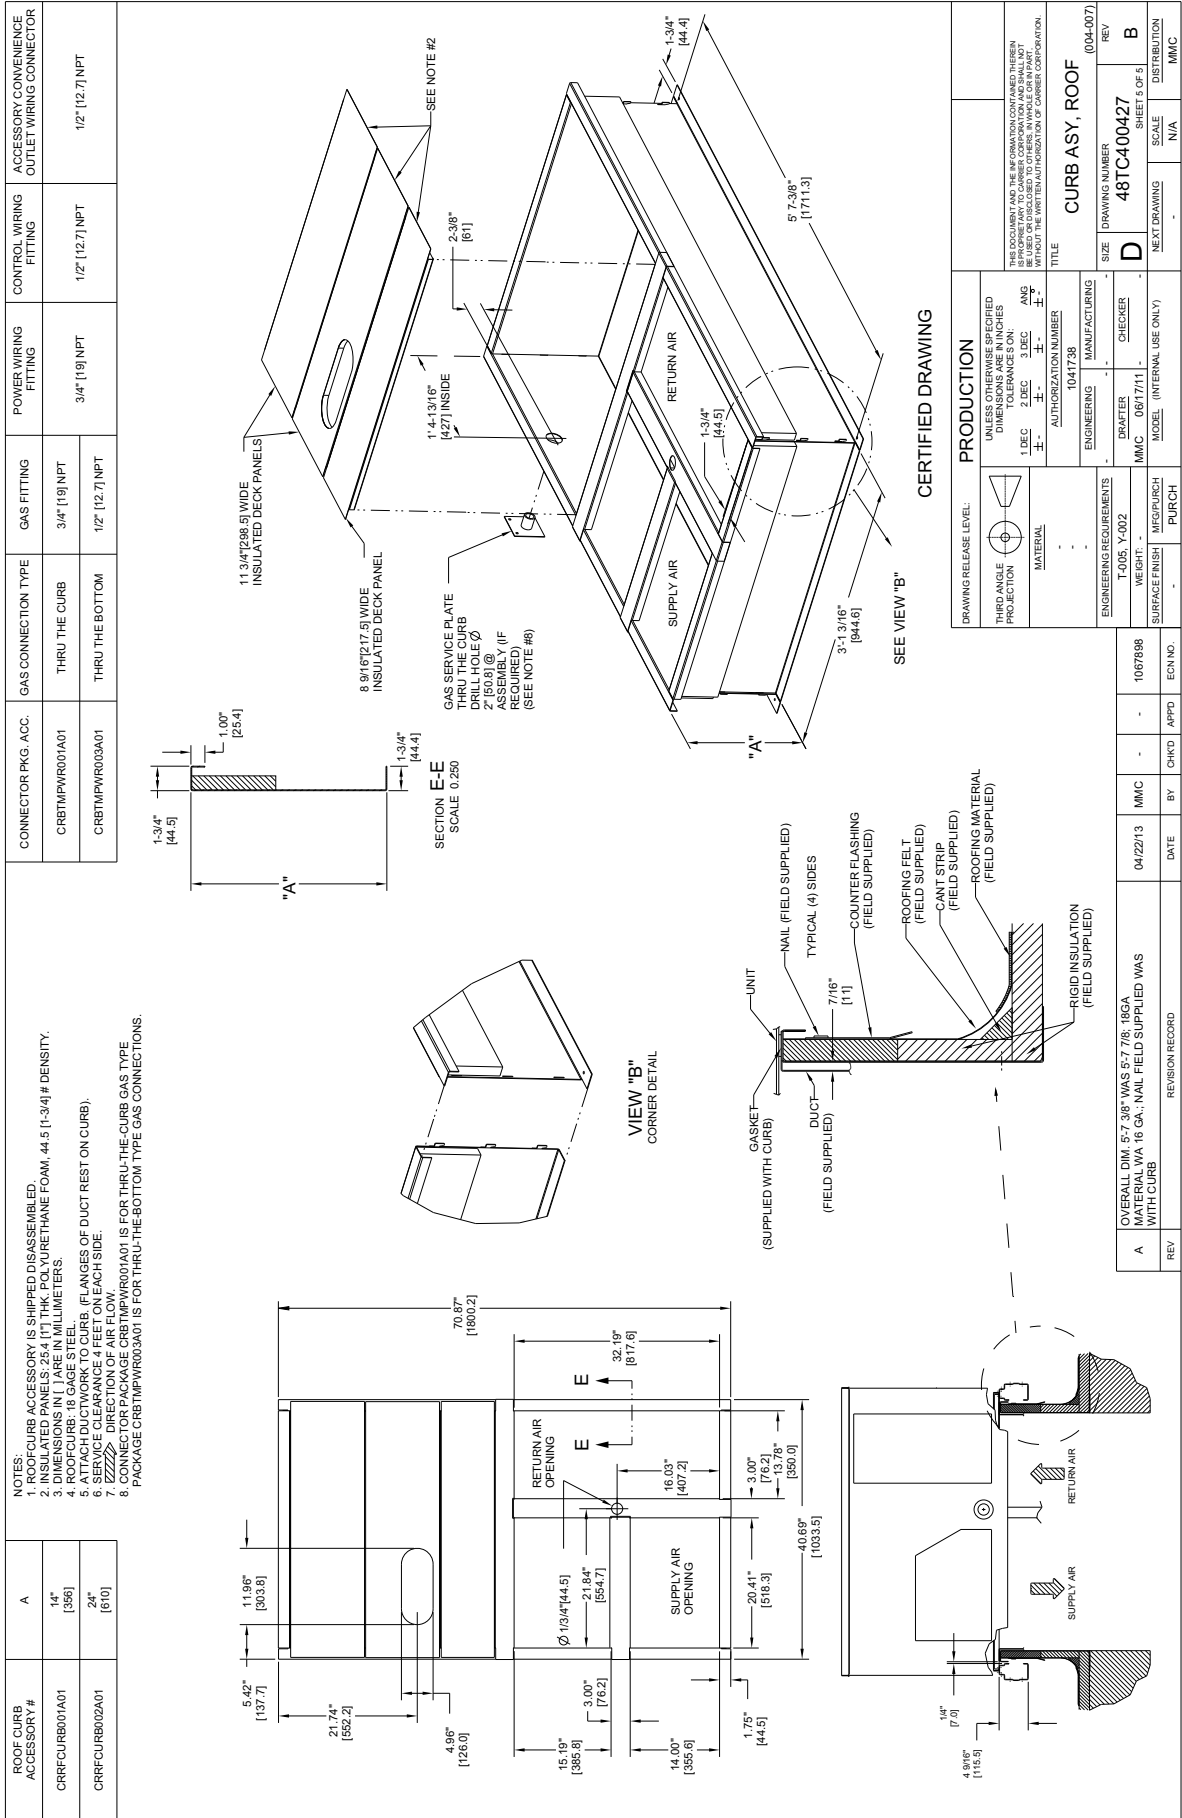


Fig. 4 - Roof Curb Details

CURBS & WEIGHTS DIMENSIONS - 50HC 07-09

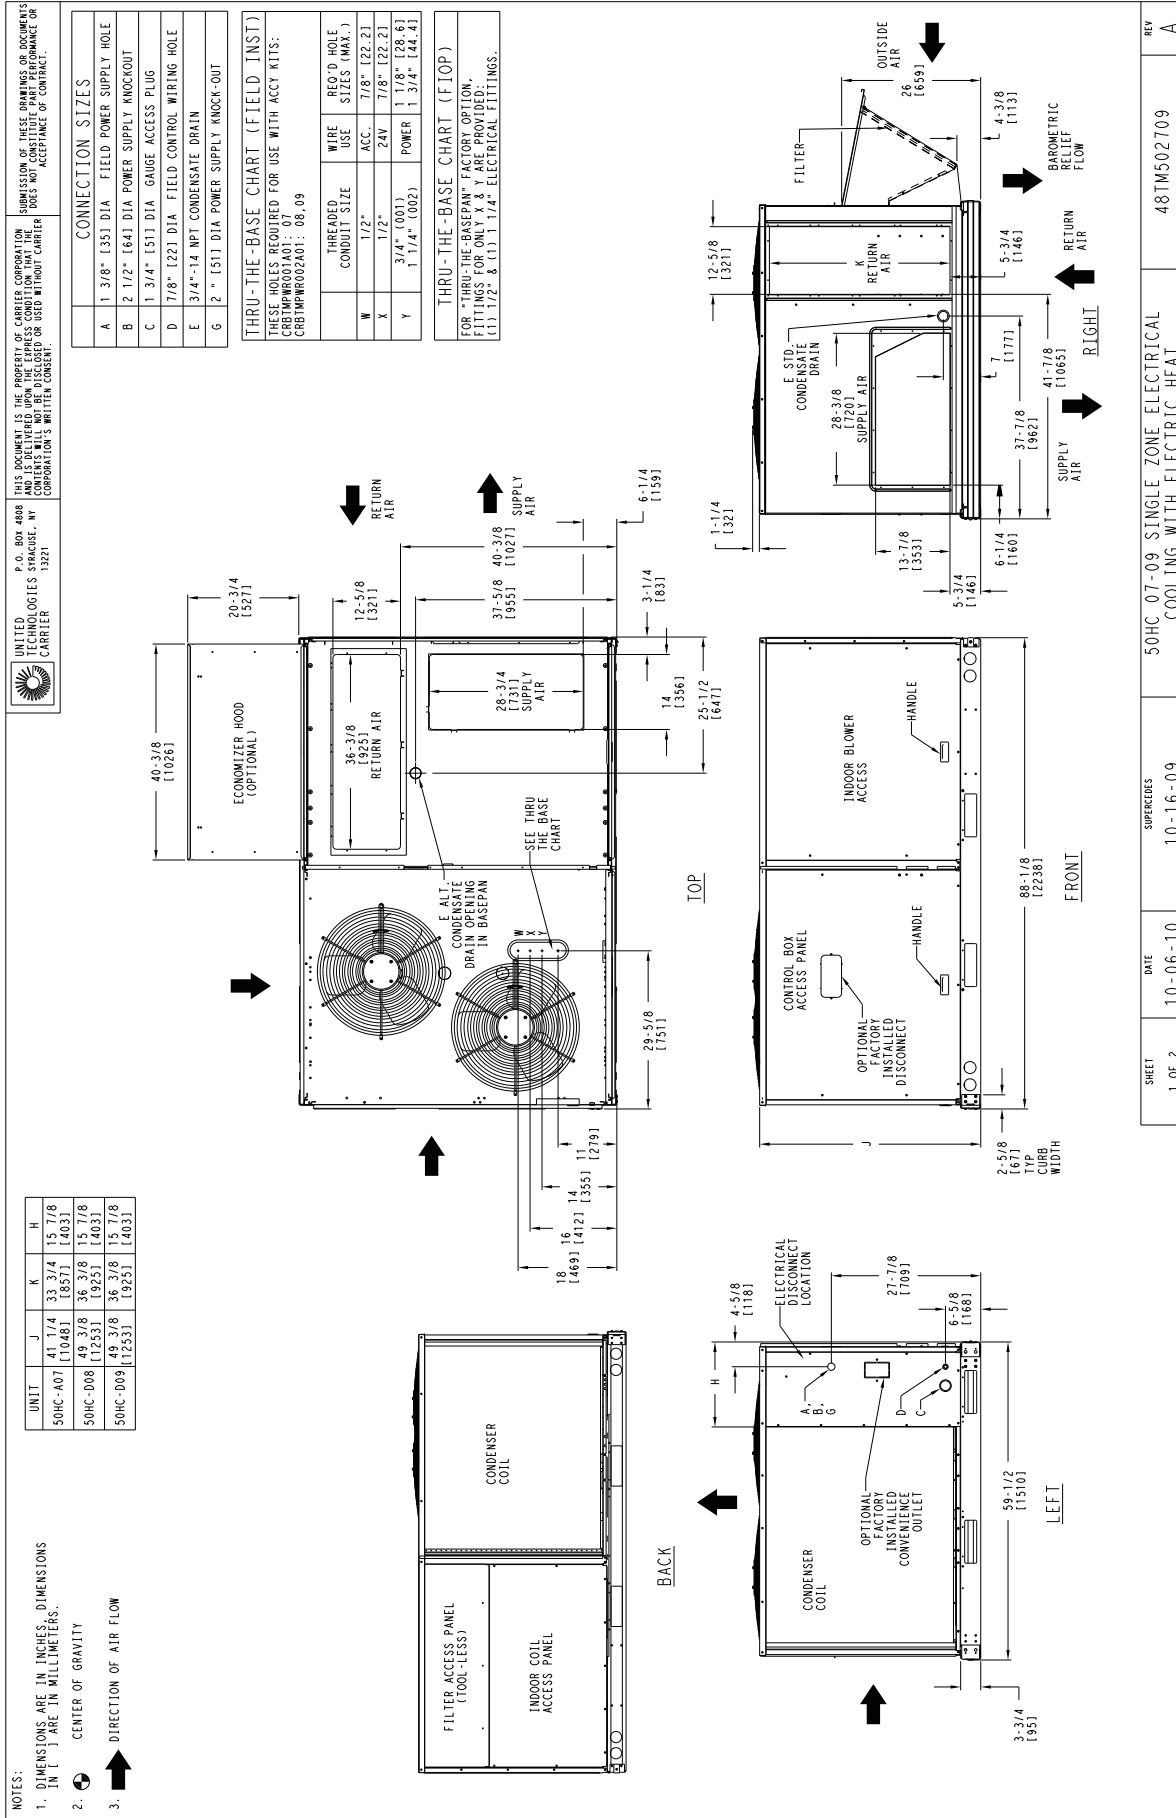


Fig. 5 - Dimensions 50HC 07-09

CURBS & WEIGHTS DIMENSIONS - 50HC 07-09 (cont.)

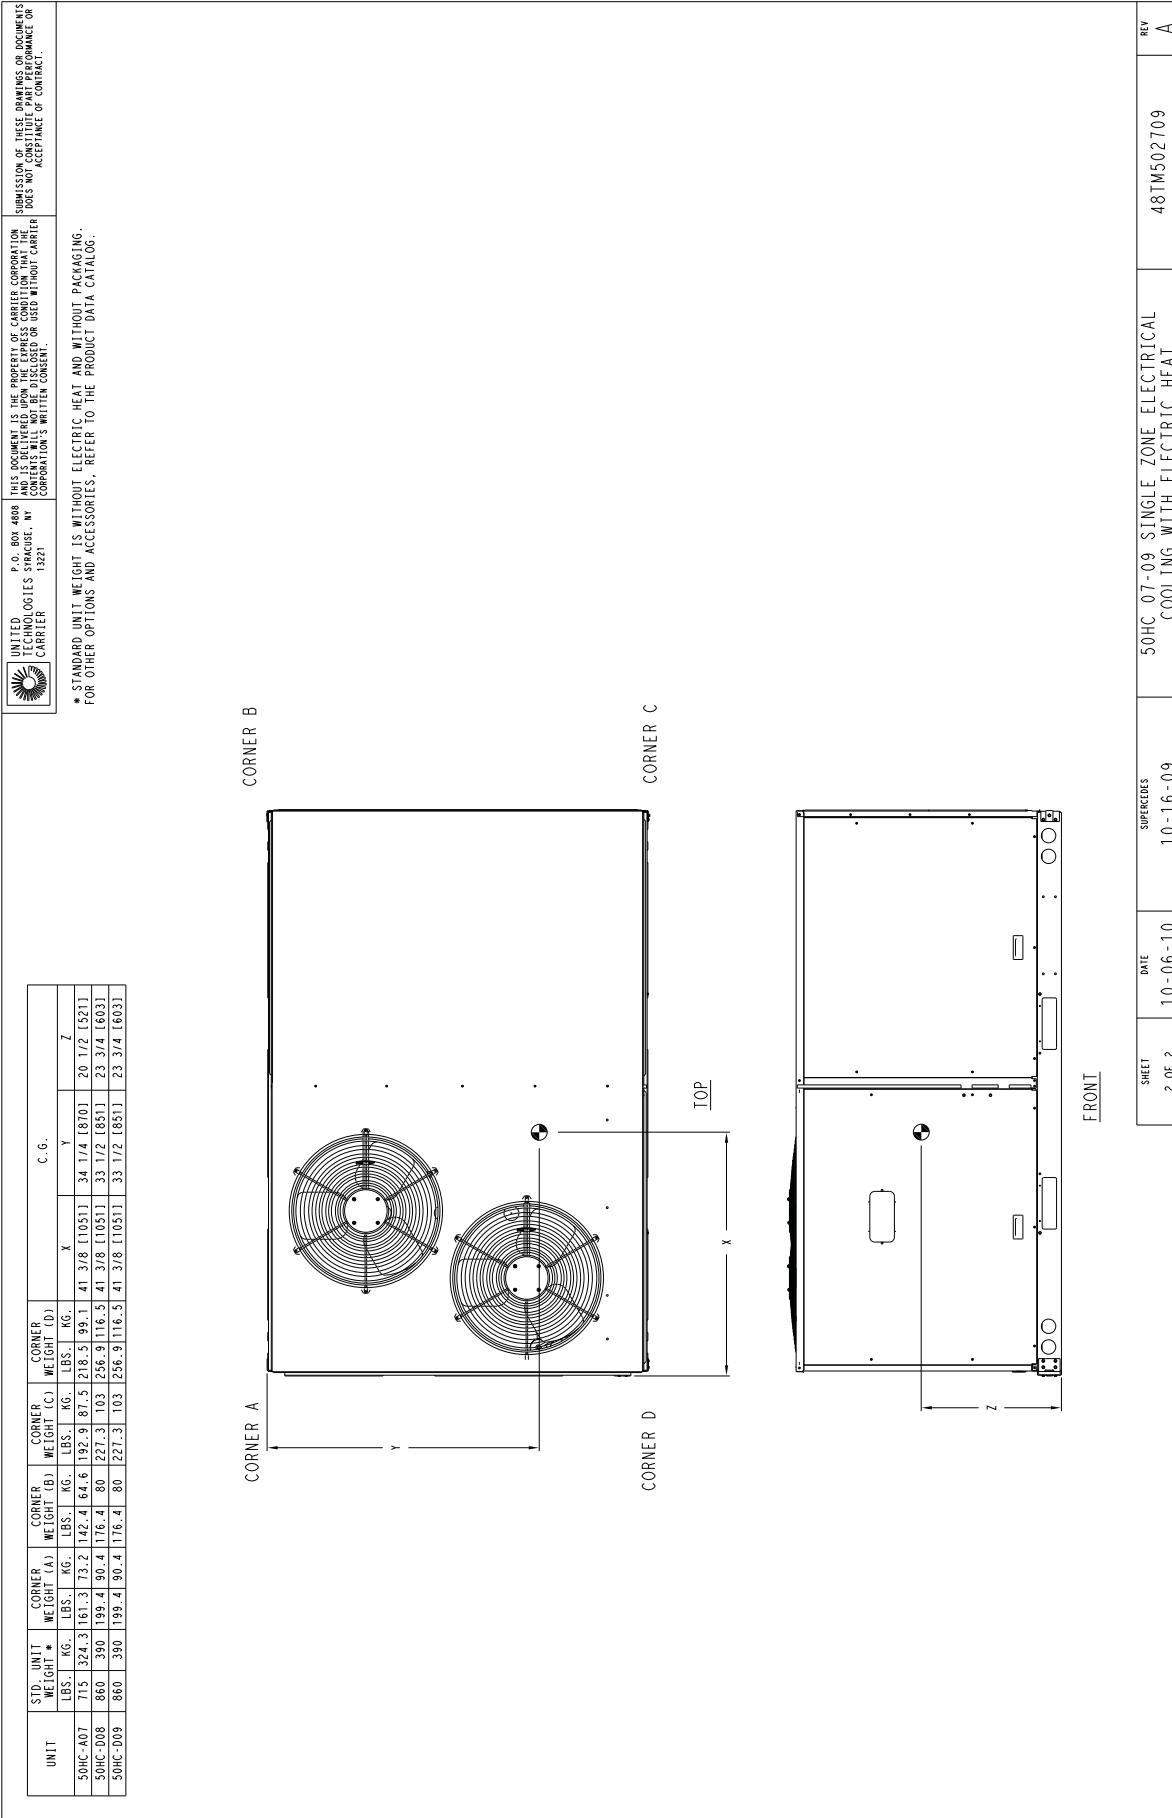


Fig. 6 - Dimensions 50HC 07-09

CURBS & WEIGHTS DIMENSIONS - 50HC 07-09 (cont.)

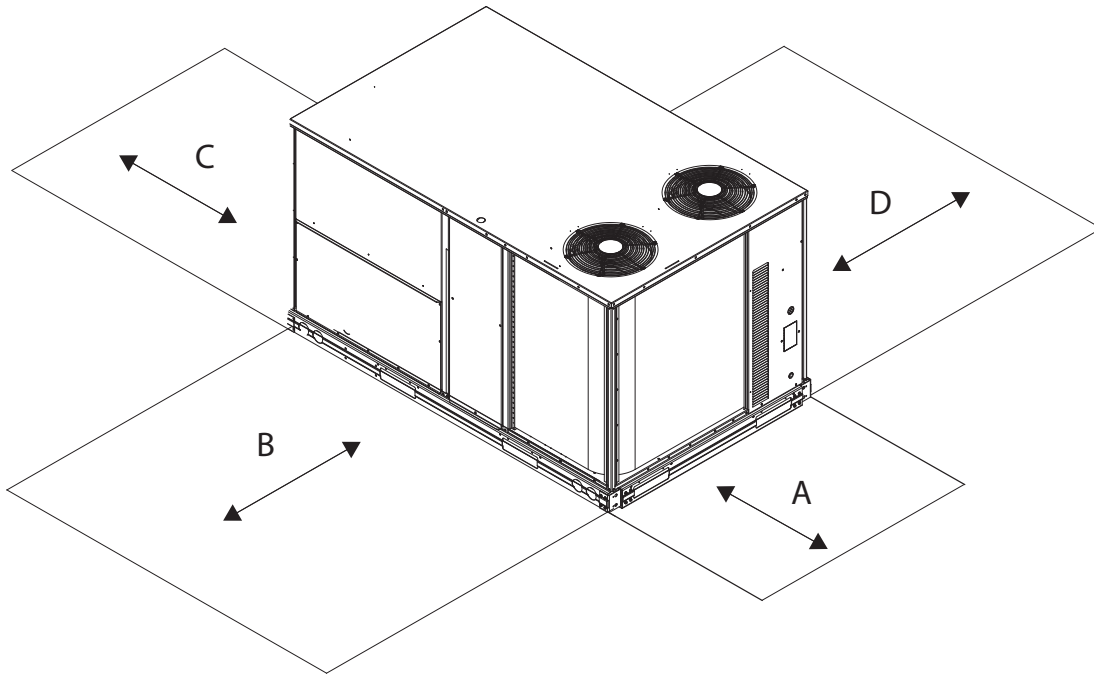



Fig. 7 - Service Clearance

C10577

LOC	DIMENSION	CONDITION
A	48-in (1219 mm) 18-in (457 mm) 18-in (457 mm) 12-in (305 mm)	Unit disconnect is mounted on panel No disconnect, convenience outlet option Recommended service clearance Minimum clearance
B	42-in (1067 mm) 36-in (914 mm) Special	Surface behind servicer is grounded (e.g., metal, masonry wall) Surface behind servicer is electrically non-conductive (e.g., wood, fiberglass) Check for sources of flue products within 10-ft of unit fresh air intake hood
C	36-in (914 mm) 18-in (457 mm)	Side condensate drain is used Minimum clearance
D	42-in (1067 mm) 36-in (914 mm)	Surface behind servicer is grounded (e.g., metal, masonry wall, another unit) Surface behind servicer is electrically non-conductive (e.g., wood, fiberglass)

NOTE: Unit not designed to have overhead obstruction. Contact Application Engineering for guidance on any application planning overhead obstruction or for vertical clearances.

CURBS & WEIGHTS DIMENSIONS - 50HC 11-12

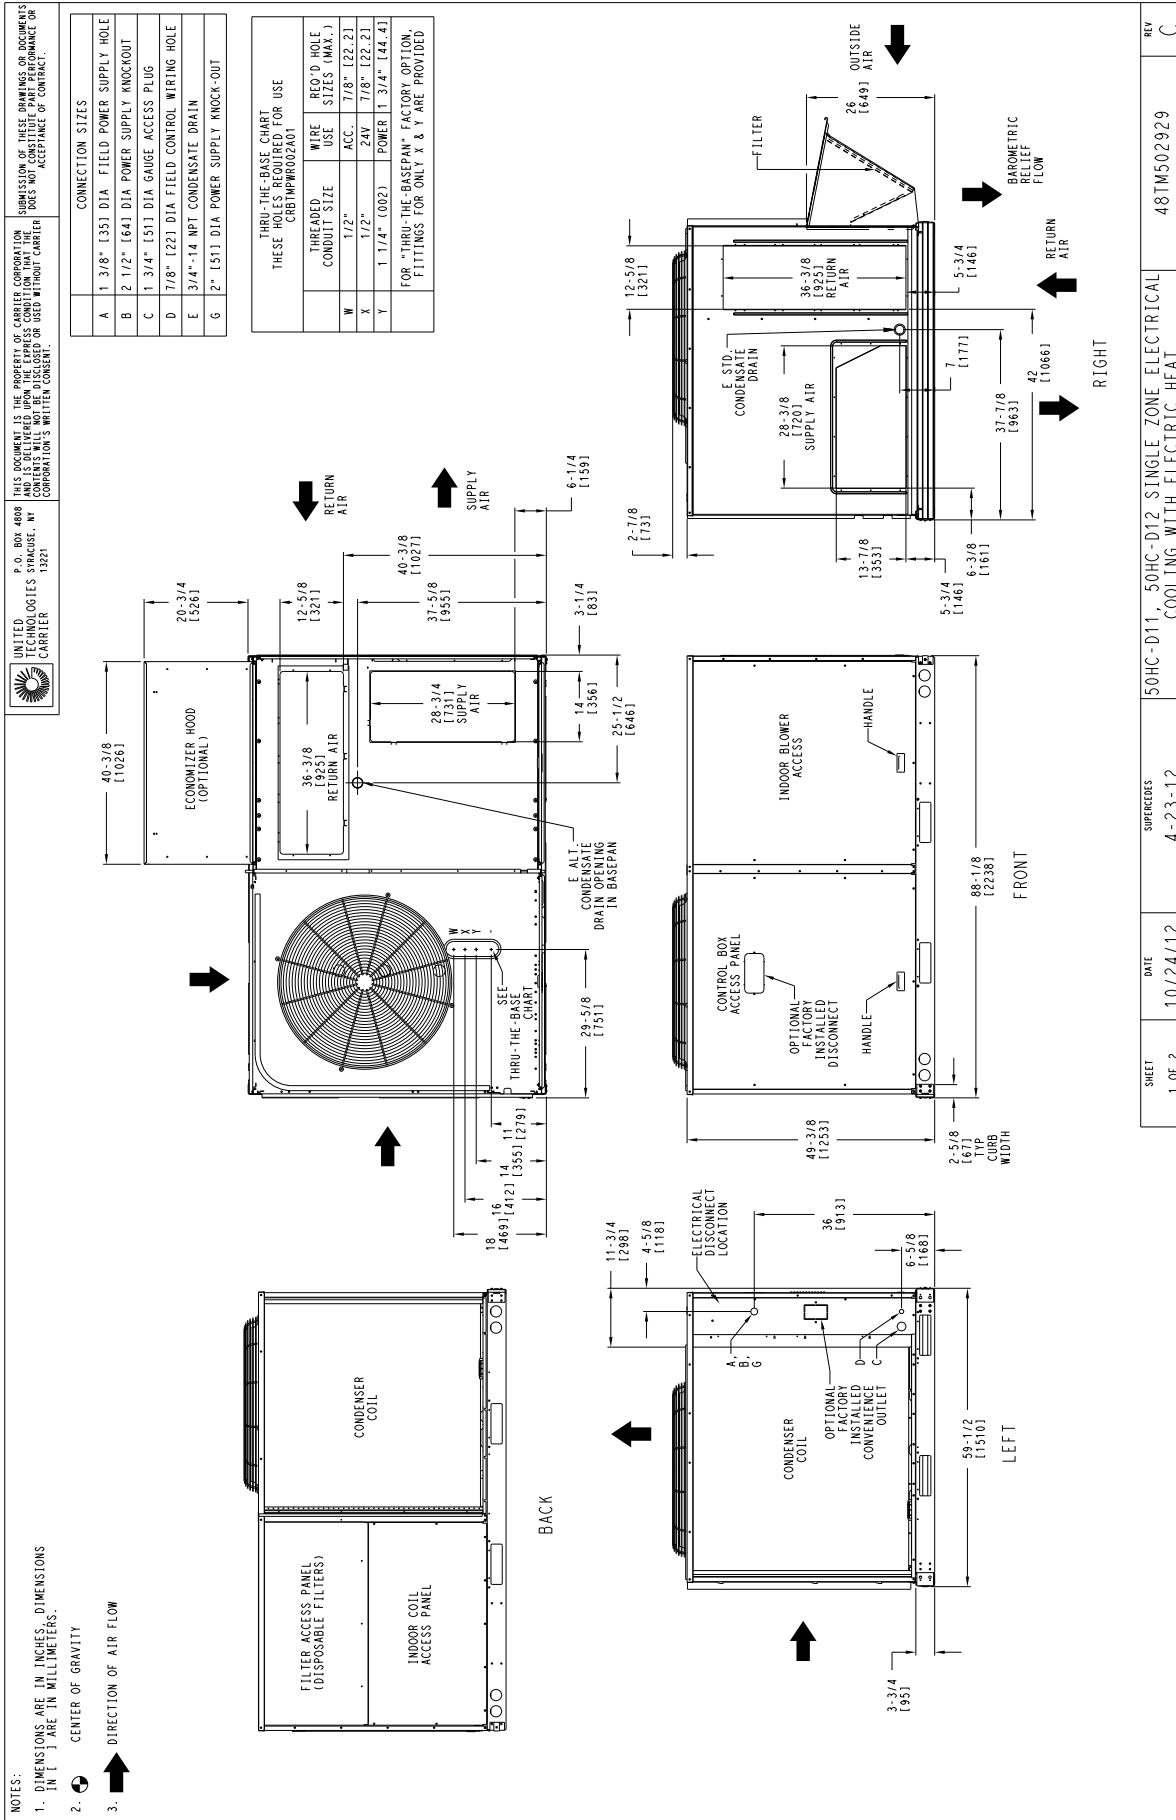

SHEET 1 OF 2
 DATE 10/24/12
 SUPERCEDES 4-23-12
 50HC-D11, 50HC-D12 SINGLE ZONE ELECTRICAL COOLING WITH ELECTRIC HEAT
 REV C
 48TM502929

Fig. 8 - Dimensions 50HC 11-12

CURBS & WEIGHTS DIMENSIONS - 50HC 11-12 (cont.)

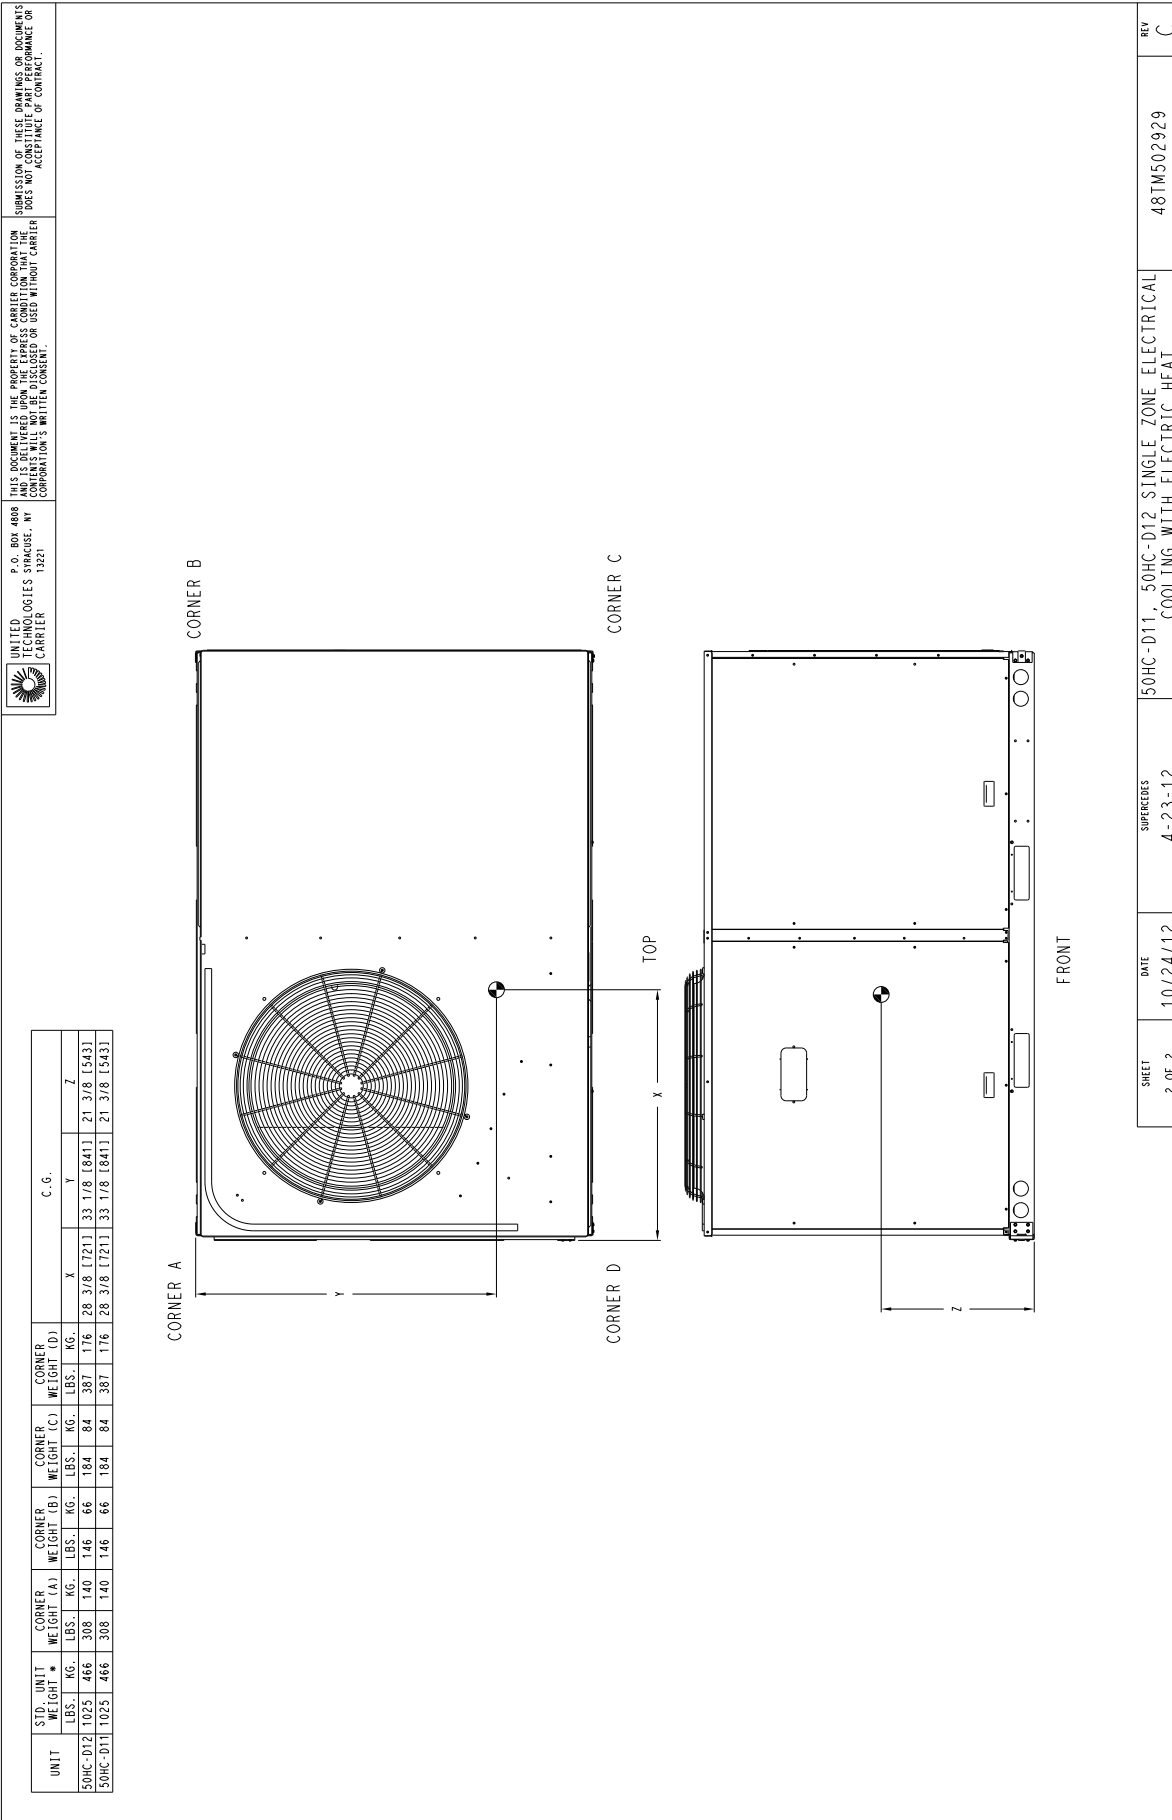


Fig. 9 - Dimensions 50HC 12

CURBS & WEIGHTS DIMENSIONS - 50HC 11-12 (cont.)

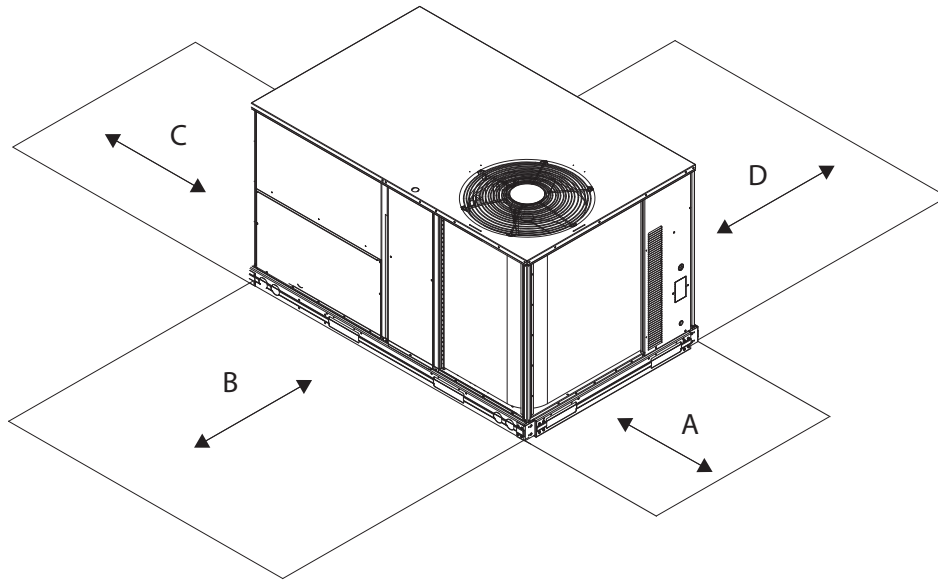


Fig. 10 - Service Clearance

C08337

LOC	DIMENSION	CONDITION
A	48-in (1219 mm) 18-in (457 mm) 18-in (457 mm) 12-in (305 mm)	Unit disconnect is mounted on panel No disconnect, convenience outlet option Recommended service clearance Minimum clearance
B	42-in (1067 mm) 36-in (914 mm) Special	Surface behind servicer is grounded (e.g., metal, masonry wall) Surface behind servicer is electrically non-conductive (e.g., wood, fiberglass) Check for sources of flue products within 10-ft of unit fresh air intake hood
C	36-in (914 mm) 18-in (457 mm)	Side condensate drain is used Minimum clearance
D	42-in (1067 mm) 36-in (914 mm)	Surface behind servicer is grounded (e.g., metal, masonry wall, another unit) Surface behind servicer is electrically non-conductive (e.g., wood, fiberglass)

NOTE: Unit not designed to have overhead obstruction. Contact Application Engineering for guidance on any application planning overhead obstruction or for vertical clearances.

CURBS & WEIGHTS DIMENSIONS - 50HC 07-12 (cont.)

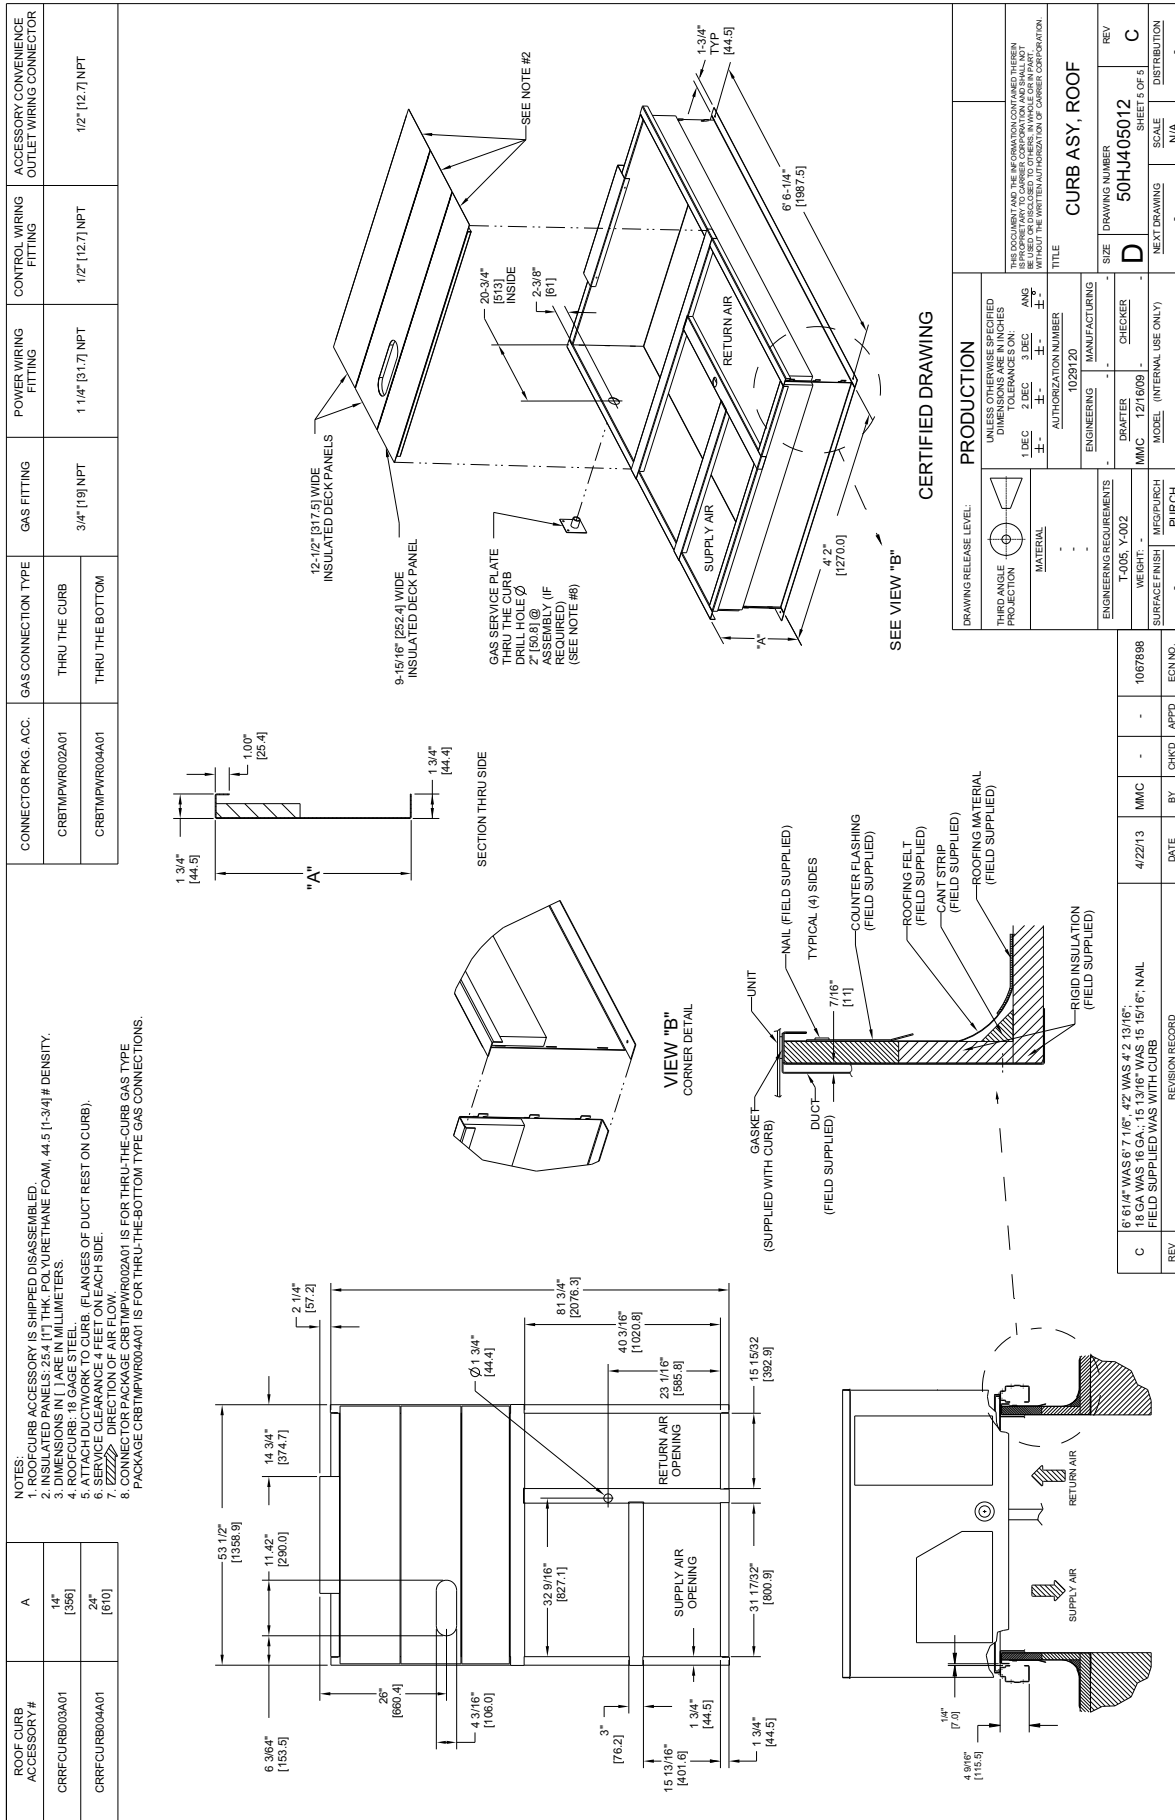


Fig. 11 - Roof Curb Details

CURBS & WEIGHTS DIMENSIONS - 50HC 14

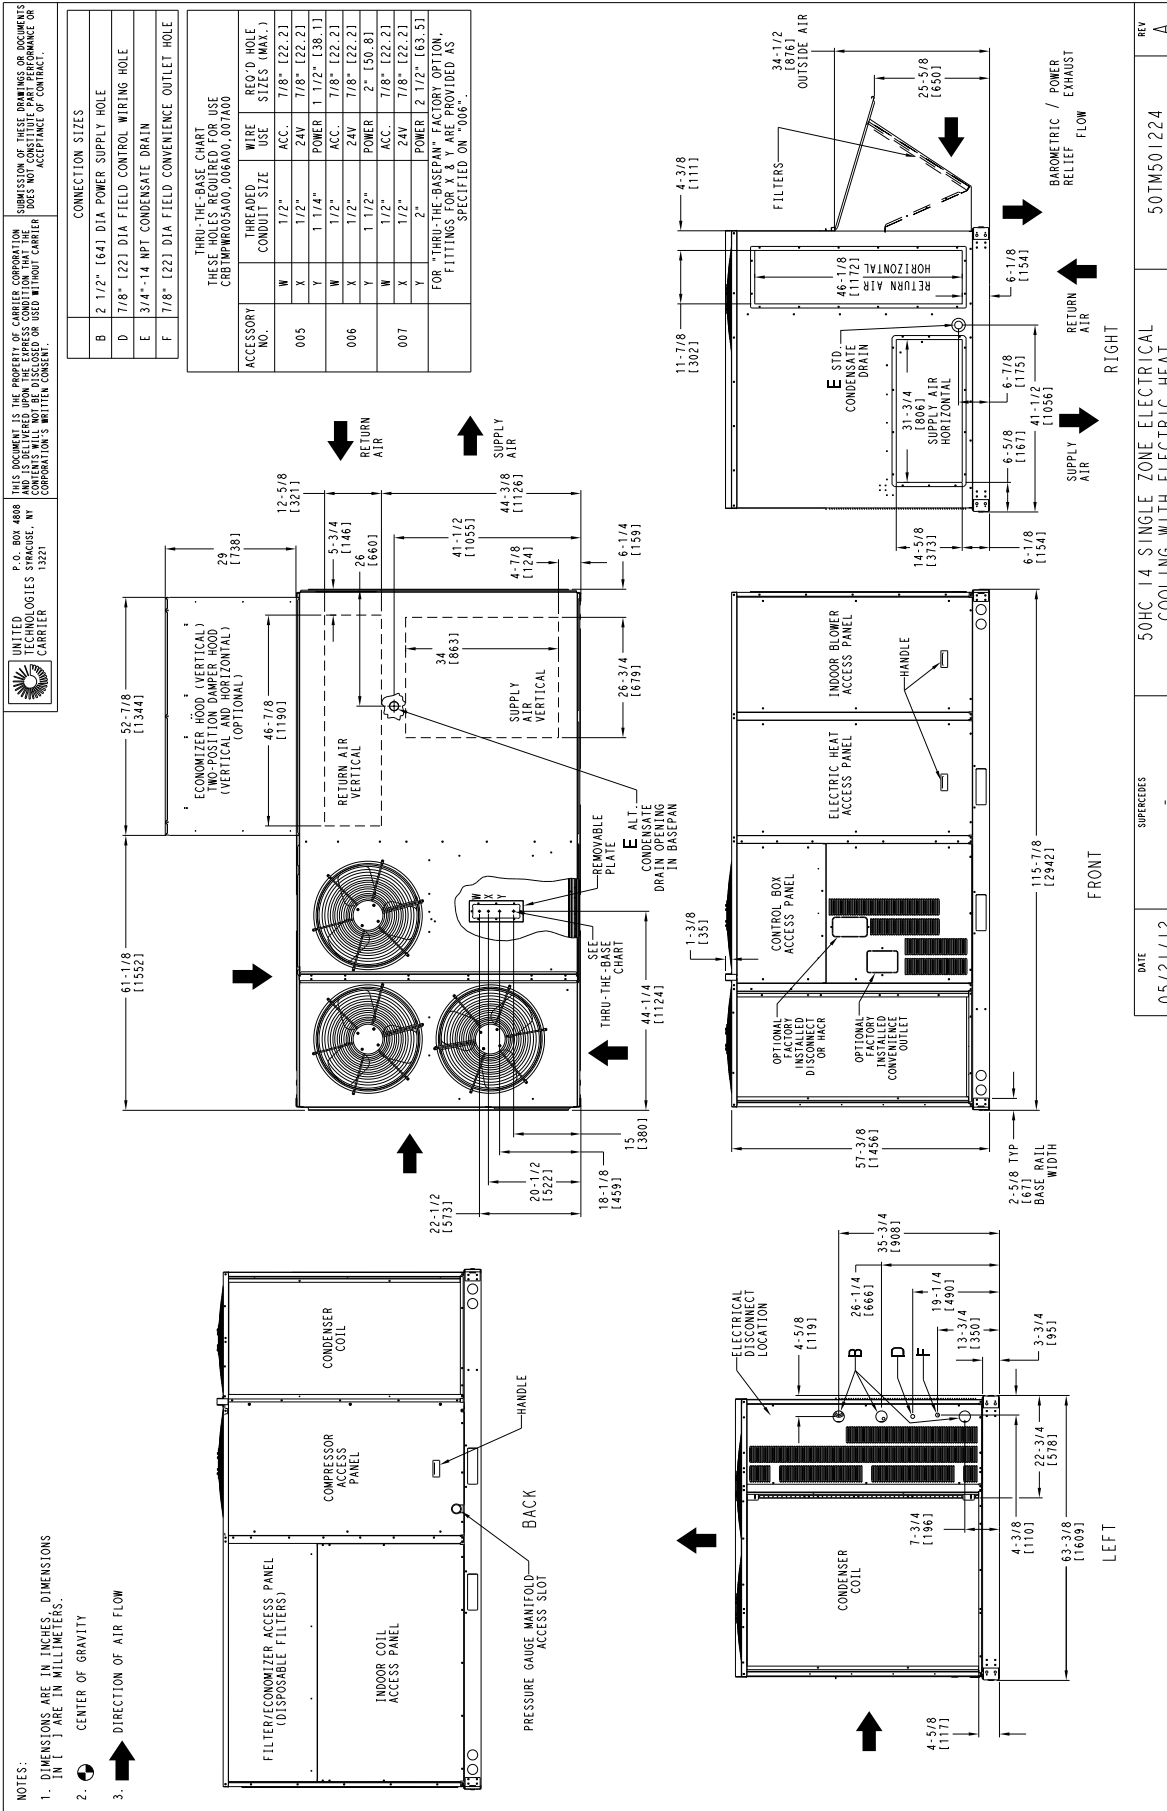


Fig. 12 - Dimensions 50HC 14

CURBS & WEIGHTS DIMENSIONS - 50HC 14 (cont.)

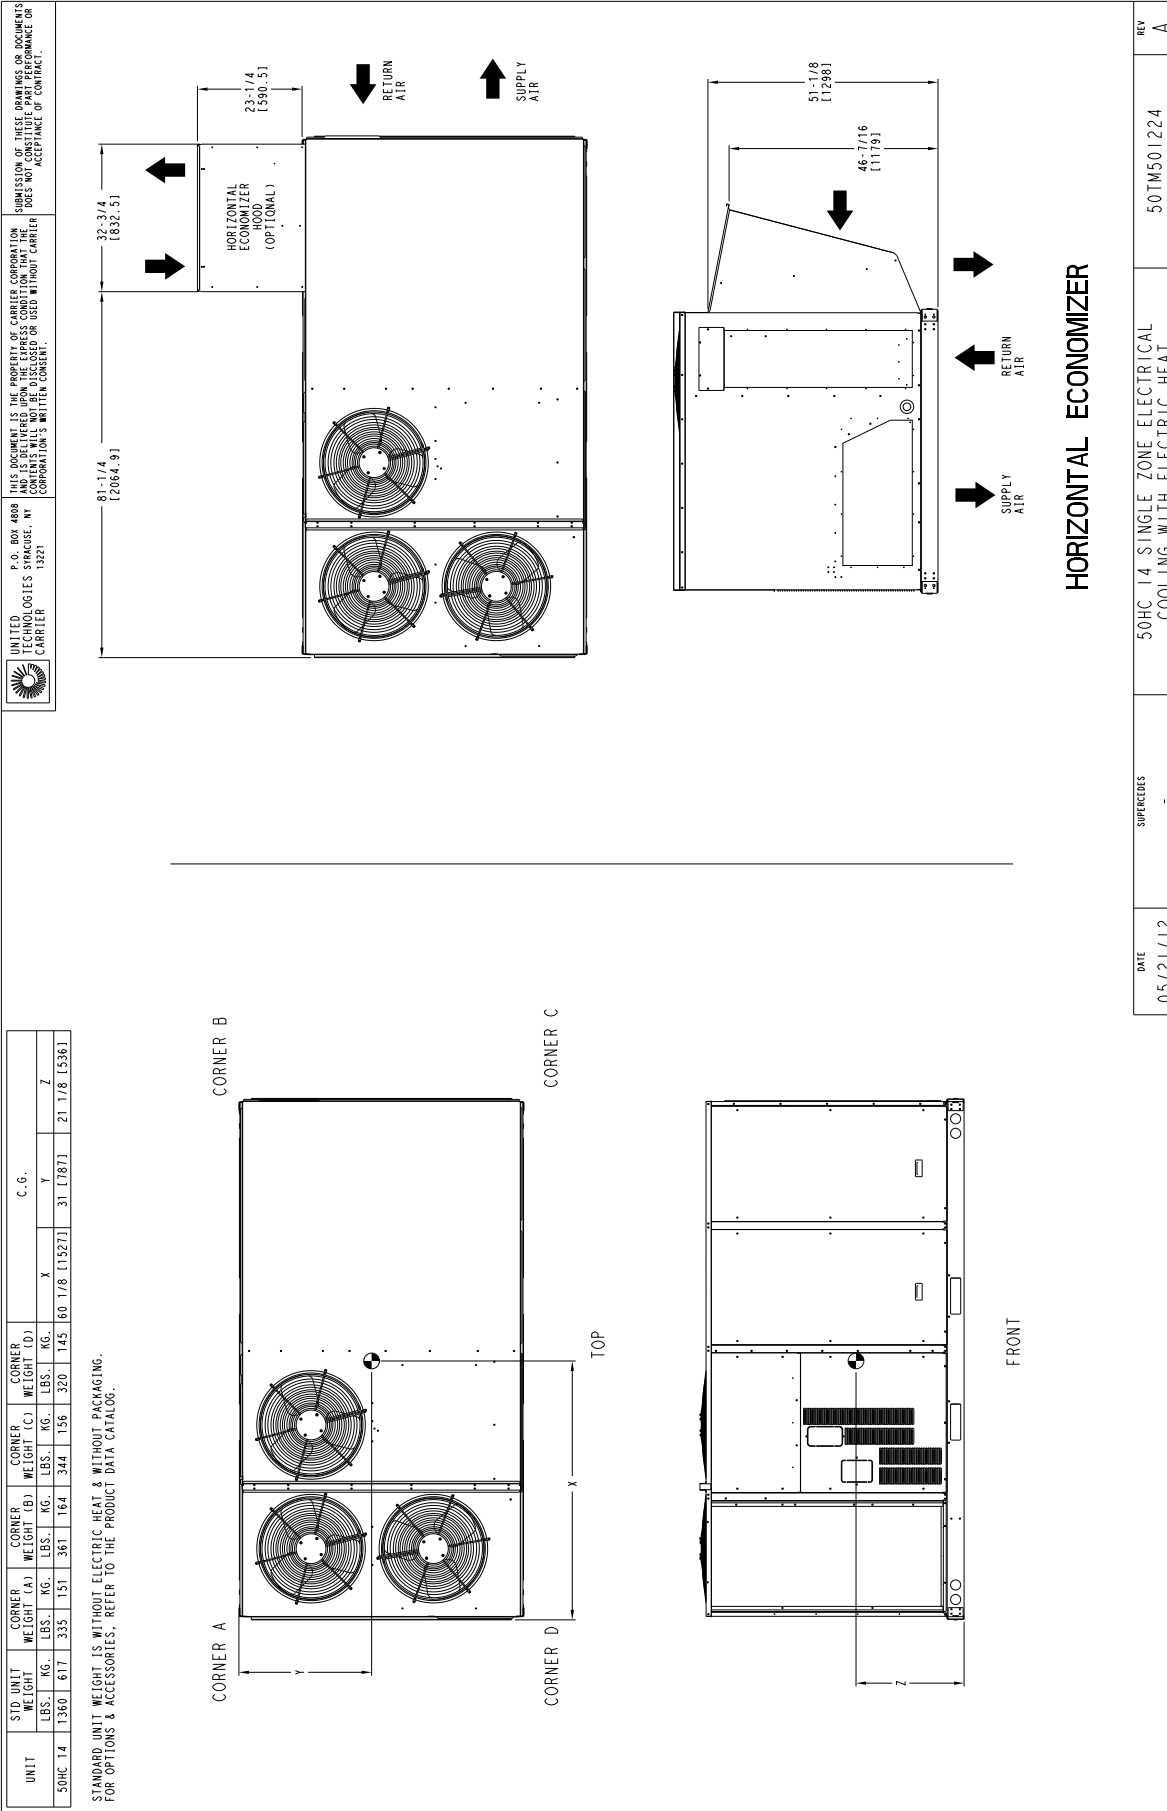


Fig. 13 - Dimensions 50HC 14

CURBS & WEIGHTS DIMENSIONS - 50HC 14 (cont.)

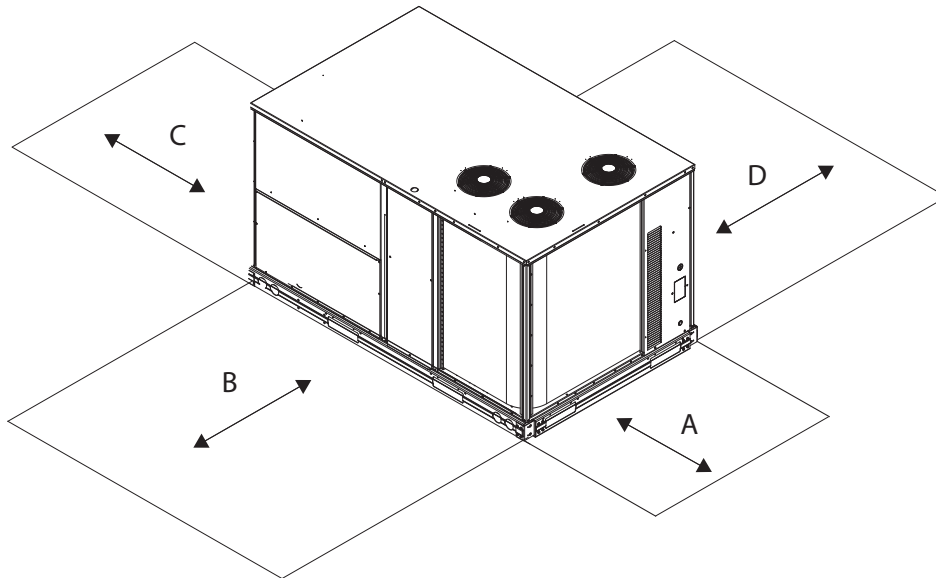


Fig. 14 - Service Clearance

C10578B

LOC	DIMENSION	CONDITION
A	48-in (1219 mm) 18-in (457 mm) 18-in (457 mm) 12-in (305 mm)	Unit disconnect is mounted on panel No disconnect, convenience outlet option Recommended service clearance Minimum clearance
B	42-in (1067 mm) 36-in (914 mm) Special	Surface behind servicer is grounded (e.g., metal, masonry wall) Surface behind servicer is electrically non-conductive (e.g., wood, fiberglass) Check for sources of flue products within 10-ft of unit fresh air intake hood
C	36-in (914 mm) 18-in (457 mm)	Side condensate drain is used Minimum clearance
D	42-in (1067 mm) 36-in (914 mm)	Surface behind servicer is grounded (e.g., metal, masonry wall, another unit) Surface behind servicer is electrically non-conductive (e.g., wood, fiberglass)

NOTE: Unit not designed to have overhead obstruction. Contact Application Engineering for guidance on any application planning overhead obstruction or for vertical clearances.

CURBS & WEIGHTS DIMENSIONS - 50HC 14 (cont.)

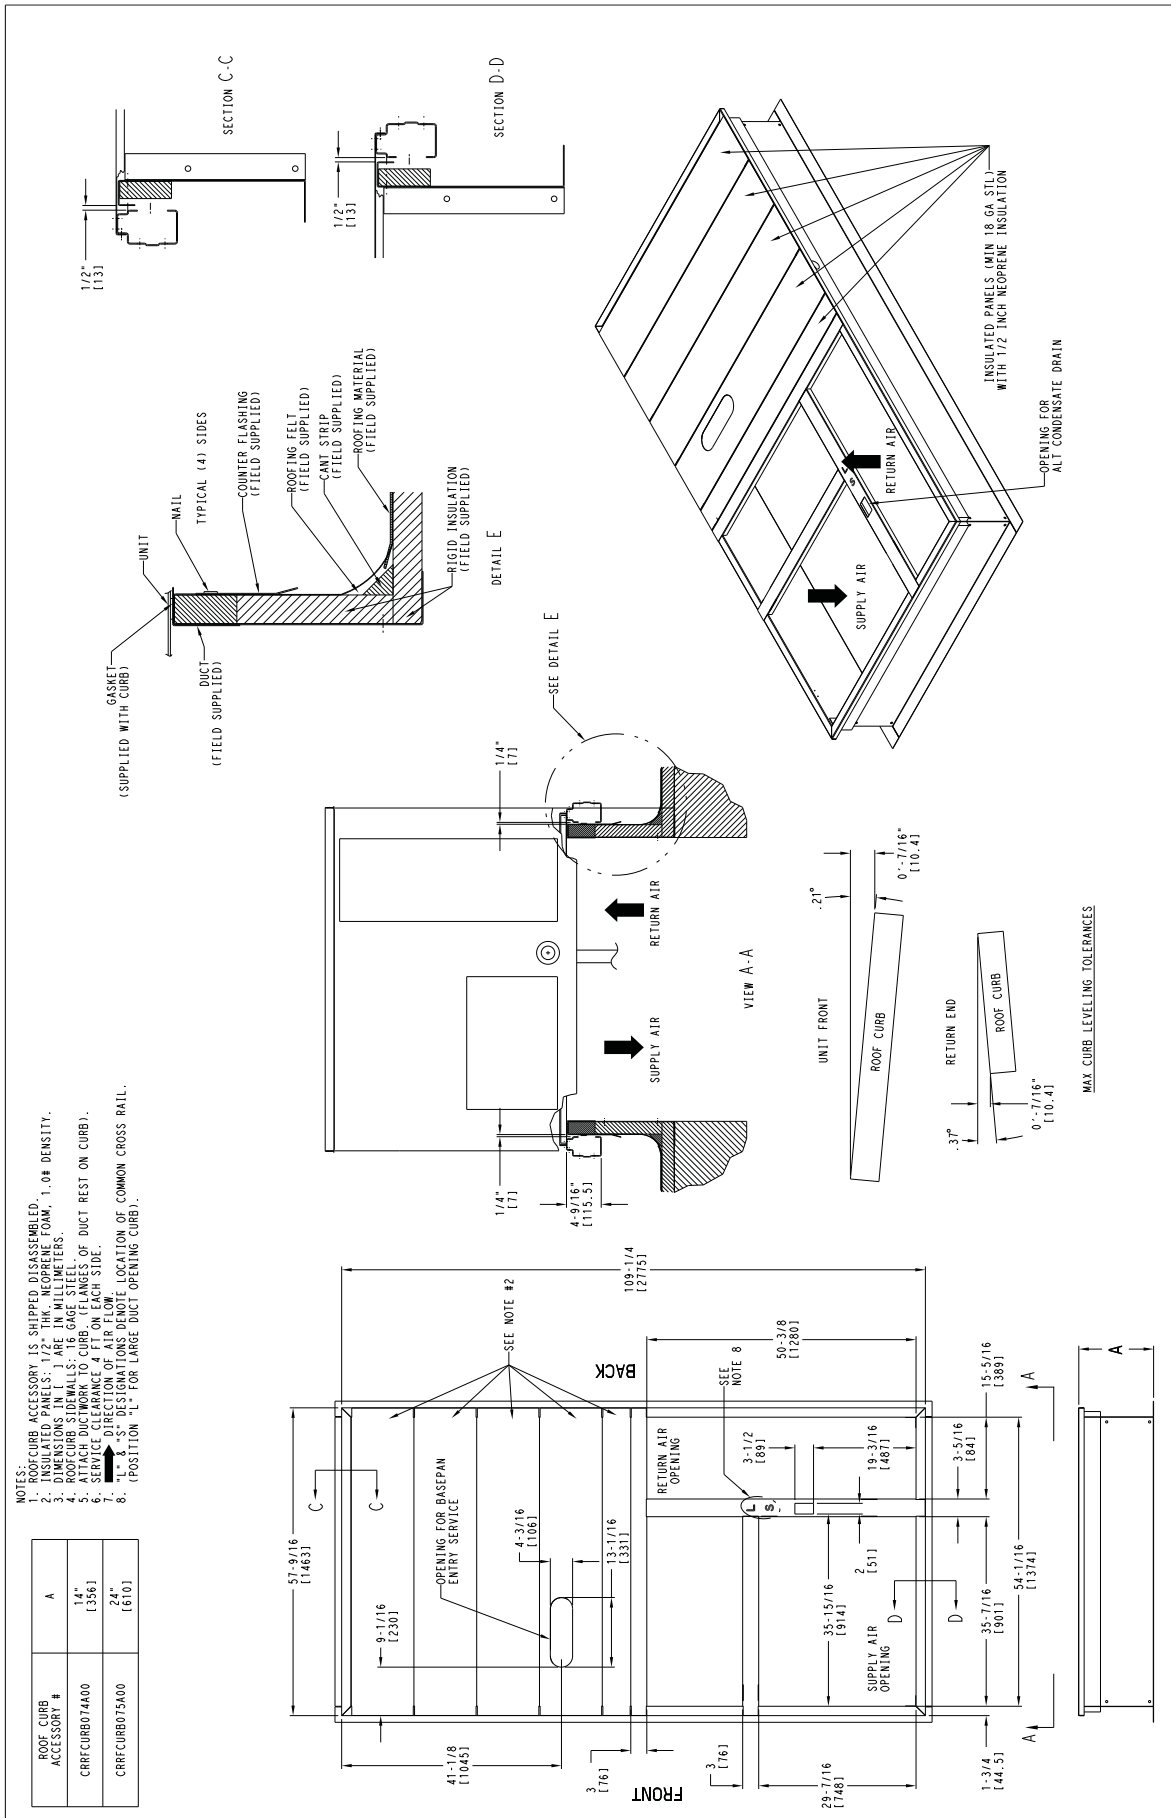


Fig. 15 - Roof Curb Detail OPTIONS & ACCESSORY WEIGHTS

OPTION / ACCESSORY	OPTION / ACCESSORY WEIGHTS																	
	04		05		06		07		08		09		11		12		14	
	lb	kg	lb	kg	lb	kg	lb	kg	lb	kg	lb	kg	lb	kg	lb	kg	lb	kg
Humidi–MiZer ¹	50	23	55	25	55	25	80	36	80	36	80	36	85	39	85	39	90	41
Power Exhaust – vertical	50	23	50	23	50	23	75	34	75	34	75	34	75	34	75	34	85	39
Power Exhaust – horizontal	30	14	30	14	30	14	30	14	30	14	30	14	30	14	30	14	75	34
EconoMi\$er (X, IV or 2)	50	23	50	23	50	23	75	34	75	34	75	34	75	34	75	34	115	52
Two Position damper	39	18	39	18	39	18	58	26	58	26	58	26	58	26	58	26	65	29
Manual Dampers	12	5	12	5	12	5	18	8	18	8	18	8	18	8	18	8	25	11
Hail Guard (louvered)	16	7	16	7	16	7	34	15	34	15	34	15	34	15	34	15	45	20
Cu/Cu Condenser Coil	35	16	35	16	35	16	95	43	95	43	95	43	170	77	170	77	160	73
Cu/Cu Cond. & Evaporator Coils	60	27	60	27	90	41	140	64	140	64	195	88	270	122	270	122	280	127
Roof Curb (14–in. curb)	115	52	115	52	115	52	143	65	143	65	143	65	143	65	143	65	180	82
Roof Curb (24–in. curb)	197	89	197	89	197	89	245	111	245	111	245	111	245	111	245	111	255	116
CO ₂ sensor	5	2	5	2	5	2	5	2	5	2	5	2	5	2	5	2	5	2
Electric Heater	30	14	30	14	30	14	45	20	45	20	45	20	45	20	45	20	25	11
Single Point Kit	10	5	10	5	10	5	12	5	12	5	12	5	12	5	12	5	25	11
Optional Indoor Motor / Drive	10	5	10	5	10	5	15	7	15	7	15	7	15	7	15	7	45	20
MotorMaster Controller	35	16	35	16	35	16	35	16	35	16	35	16	35	16	35	16	40	18
Low Ambient Controller	5	2	5	2	5	2	5	2	5	2	5	2	5	2	5	2	5	2
Return Smoke Detector	5	2	5	2	5	2	5	2	5	2	5	2	5	2	5	2	5	2
Supply Smoke Detector	5	2	5	2	5	2	5	2	5	2	5	2	5	2	5	2	5	2
Fan / Filter Status Switch	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1
Non–Fused Disconnect	15	7	15	7	15	7	15	7	15	7	15	7	15	7	15	7	10	5
HACR Circuit Breaker	15	7	15	7	15	7	15	7	15	7	15	7	15	7	15	7	10	5
Powered Convenience outlet	35	16	35	16	35	16	35	16	35	16	35	16	35	16	35	16	32	15
Non–Powered C.O.	5	2	5	2	5	2	5	2	5	2	5	2	5	2	5	2	4	2
Enthalpy Sensor	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1
Differential Enthalpy Sensor	3	1	3	1	3	1	3	1	3	1	3	1	3	1	3	1	3	1
SAV System with VFD	–	–	–	–	–	–	–	–	20	9	20	9	20	9	20	9	20	9

NOTE: Where multiple variations are available, the heaviest combination is listed.

– Not Available

¹ For Humidi–MiZer add MotorMaster Controller.

APPLICATION DATA

Min operating ambient temp (cooling):

In mechanical cooling mode, your Carrier rooftop can safely operate down to an outdoor ambient temperature of 35°F (-2°C) and 25°F (-4°C), with an accessory winter start kit. It is possible to provide cooling at lower outdoor ambient temperatures by using less outside air, economizers, and/or accessory low ambient kits.

Max operating ambient temp (cooling):

The maximum operating ambient temperature for cooling mode is 125°F (52°C). While cooling operation above 125°F (52°C) may be possible, it could cause either a reduction in performance, reliability, or a protective action by the unit's internal safety devices.

Min and max airflow (cooling mode):

To maintain safe and reliable operation of your rooftop, operate within the cooling airflow limits. Operating above the max may cause blow-off, undesired airflow noise, or airflow related problems with the rooftop unit. Operating below the min may cause problems with coil freeze-up.

Airflow:

All units are draw-through in cooling mode.

Outdoor air application strategies:

Economizers reduce operating expenses and compressor run time by providing a free source of cooling and a means of ventilation to match application changing needs. In fact, they should be considered for most applications. Also, consider the various economizer control methods and their benefits, as well as sensors required to accomplish your application goals. Please contact your local Carrier representative for assistance.

Motor limits, break horsepower (BHP):

Due to Carrier's internal unit design, air path, and specially designed motors, the full horsepower (maximum continuous BHP) band, as listed in Table 6 and 7, can be used with the utmost confidence. There is no need for extra safety factors, as Carrier's motors are designed and rigorously tested to use the entire, listed BHP range without either nuisance tripping or premature motor failure.

Sizing a rooftop

Bigger isn't necessarily better. While an air conditioner needs to have enough capacity to meet the load, it doesn't need excess capacity. In fact, having excess capacity typically results in very poor part load performance and humidity control.

Using higher design temperatures than ASHRAE recommends for your location, adding "safety factors" to the calculated load, and rounding up to the next largest unit, are all signs of oversizing air conditioners. Oversizing can cause short-cycling, and short cycling leads to poor humidity control, reduced efficiency, higher utility bills, drastic indoor temperature swings, excessive noise, and increased wear and tear on the air conditioner.

Rather than oversizing an air conditioner, wise contractors and engineers "right-size" or even slightly undersize air conditioners. Correctly sizing an air conditioner controls humidity better; promotes efficiency; reduces utility bills; extends equipment life, and maintains even, comfortable temperatures.

Low ambient applications

When equipped with a Carrier economizer, your rooftop unit can cool your space by bringing in fresh, cool outside air. In fact, when so equipped, accessory low-ambient kit may not be necessary. In low ambient conditions, unless the outdoor air is excessively humid or contaminated, economizer-based "free cooling" is the preferred less costly and energy conscious method.

In low ambient applications where outside air might not be desired (such as contaminated or excessively humid outdoor environments), your Carrier rooftop can operate to ambient temperatures down to -20°F (-29°C) using the recommended field installed accessory MotorMaster low ambient controller or 0°F (-18°C) with the factory installed low ambient controller option.

Winter start

Carrier's winter start kit extends the low ambient limit of your rooftop to 25°F (-4°C). The kit bypasses the low pressure switch, preventing nuisance tripping of the low pressure switch. Other low ambient precautions may still be prudent.

50HC - Staged Air volume (SAV) - Variable Frequency Drive (VFD) HP Rating

UNIT SIZE	VOLTAGE	STATIC OPTION	VFD HP RATING
08	208/230, 460, 575	STD	3
	208/230, 460, 575	MED	3
	208/230, 460, 575	HIGH	7.5
09	208/230, 460, 575	STD	3
	208/230, 460, 575	MED	3
	208/230, 460, 575	HIGH	5
11	208/230, 460, 575	STD	3
	208/230, 460, 575	MED	5
	208/230, 460, 575	HIGH	7.5
12	208/230, 460, 575	STD	3
	208/230, 460, 575	MED	5
	208/230, 460, 575	HIGH	7.5
14	208/230. 460	STD	3
	575	STD	5
	208/230, 460, 575	MED	5
	208/230, 460, 575	HIGH	7.5

SELECTION PROCEDURE (WITH 50HC*A07 EXAMPLE)¹

I. Determine cooling and heating loads.

Given:

Mixed Air Drybulb	80°F (27°C)
Mixed Air Wetbulb	67°F (19°C)
Ambient Drybulb	95°F (35°C)
TC _{Load}	69.0 MBH
SHC _{Load}	51.0 MBH
Vertical Supply Air	2100 CFM
External Static Pressure	0.66 in. w.g.
Electrical Characteristics	230-3-60

II. Make an initial guess at cooling tons.

Refrig. tons = TC_{Load} / 12 MBH per ton

Refrig. tons = 69.0 / 12 = 5.75 tons

In this case, start by looking at the 50HC*A07.

III. Look up the rooftop's TC and SHC.

Cooling Capacity Table shows that, at the application's supply air CFM, mixed air and ambient temperatures, the 50HC*A07 supplies:

TC_{Load} = 73.6 MBH

SHC_{Load} = 53.3 MBH.

IV. Calculate the building Latent Heat Load.

LC_{Load} = TC_{Load} - SHC_{Load}

LC_{Load} = 69.0 MBH - 51.0 MBH = 18.0 MBH

V. Calculate RTU Latent Heat Capacity

LC = TC - SHC

LC = 73.6 MBH - 53.3 MBH = 20.3 MBH

VI. Compare RTU capacities to loads.^{2,3}

Compare the rooftop's SHC and LC to the building's Sensible and Latent Heat Loads.

VII. Select factory options (FIOP)

Local code requires an economizer for any unit with TC larger than 65.0 MBH.

VIII. Calculate the total static pressure.

External static pressure 0.66 in. wg

Sum of FIOP/Accessory static +0.05 in. wg

Total Static Pressure 0.71 in. wg

IX. Look up the Indoor Fan RPM & BHP.

Table 22 shows, at 2100 CFM & ESP= 0.71, RPM = 680 & BHP = 0.97

X. Convert BHP (Step IX) into fan motor heat.

Fan Motor Heat = 2.546*097/.80 efficiency.

Fan Motor Heat = 1.98 MBH

Deduct this value from the gross capacity values for net capacity.

XI. Determine electrical requirements

MCA/MOCP table shows the MCA and MOCP of a 50HC*A07 (without convenience outlet) as:

MCA = 32 amps & Breaker size = 50 amps

Min. Disconnect Size: FLA = 31 & LRA = 148.

Legend

BHP	— Break horsepower
FLA	— Full load amps
LC	— Latent capacity
LRA	— Lock rotor amp
MBH	— (1,000) BTUH
MCA	— Min. circuit ampacity
MOCP	— Max. over-current protection
RPM	— Revolutions per minute
RTU	— Rooftop unit
SHC	— Sensible heat capacity
TC	— Total capacity

NOTES:

1. Selection software by Carrier saves time by performing many of the steps above. Contact your Carrier sales representative for assistance.
2. Selecting a unit with a SHC slightly lower than the SHC_{Load} is often better than oversizing. Slightly lower SHC's will help control indoor humidity, and prevent temperature swings.
3. If the rooftop's capacity meets the Sensible Heat Load, but not the Latent Heat Load.
4. Indoor Fan Motor efficiency is available in Table NO TAG. Use the decimal form in the equation eg. 80% = .8.

Table 8 – COOLING CAPACITIES

1-STAGE COOLING

50HC*A04				AMBIENT TEMPERATURE																	
				85			95			105			115			125					
				EA (dB)			EA (dB)			EA (dB)			EA (dB)			EA (dB)					
				75	80	85	75	80	85	75	80	85	75	80	85	75	80	85			
900	Cfm	EA (wB)	58	TC	32.1	32.1	36.3	30.8	30.8	34.9	29.4	29.4	33.4	28.0	28.0	31.7	26.3	26.3	29.8		
			58	SHC	27.8	32.1	36.3	26.7	30.8	34.9	25.5	29.4	33.4	24.2	28.0	31.7	22.8	26.3	26.3	29.8	
			62	TC	34.0	34.0	34.3	32.3	32.3	33.5	30.6	30.6	32.6	28.7	28.7	31.7	26.6	26.6	30.6		
				SHC	25.0	29.7	34.3	24.2	28.9	33.5	23.4	28.0	32.6	22.5	27.1	31.7	21.5	26.0	30.6		
			67	TC	37.3	37.3	37.3	35.5	35.5	35.5	33.6	33.6	33.6	31.5	31.5	31.5	29.2	29.2	29.2		
				SHC	20.7	25.4	30.0	20.0	24.6	29.3	19.2	23.8	28.4	18.3	22.9	27.6	17.4	22.0	26.6		
		72	TC	40.8	40.8	40.8	38.9	38.9	38.9	36.9	36.9	36.9	34.6	34.6	34.6	32.2	32.2	32.2			
			SHC	16.3	21.0	25.7	15.6	20.3	25.0	14.8	19.5	24.1	13.9	18.6	23.3	13.0	17.7	22.3			
		76	TC	-	43.9	43.9	-	41.8	41.8	-	39.6	39.6	-	37.2	37.2	-	34.6	34.6			
			SHC	-	17.4	22.4	-	16.7	21.7	-	15.9	20.8	-	15.1	19.9	-	14.2	19.0			
		1050	Cfm	EA (wB)	58	TC	33.8	33.8	38.4	32.5	32.5	36.8	31.0	31.0	35.1	29.4	29.4	33.3	27.6	27.6	31.3
					58	SHC	29.3	33.8	38.4	28.1	32.5	36.8	26.9	31.0	35.1	25.5	29.4	33.3	23.9	27.6	31.3
62	TC				35.1	35.1	37.5	33.3	33.3	36.6	31.5	31.5	35.7	29.6	29.6	34.5	27.7	27.7	32.6		
	SHC				26.9	32.2	37.5	26.0	31.3	36.6	25.1	30.4	35.7	24.1	29.3	34.5	22.7	27.7	32.6		
67	TC				38.4	38.4	38.4	36.5	36.5	36.5	34.5	34.5	34.5	32.3	32.3	32.3	29.9	29.9	29.9		
	SHC				22.0	27.3	32.7	21.2	26.5	31.9	20.3	25.7	31.0	19.4	24.8	30.1	18.5	23.8	29.1		
72	TC			42.0	42.0	42.0	40.0	40.0	40.0	37.8	37.8	37.8	35.5	35.5	35.5	32.9	32.9	32.9			
	SHC			16.9	22.3	27.6	16.1	21.5	26.9	15.3	20.7	26.0	14.4	19.8	25.1	13.5	18.8	24.2			
76	TC			-	45.0	45.0	-	42.9	42.9	-	40.6	40.6	-	38.0	38.0	-	35.3	35.3			
	SHC			-	18.1	23.8	-	17.4	23.0	-	16.6	22.2	-	15.7	21.3	-	14.8	20.3			
1200	Cfm			EA (wB)	58	TC	35.3	35.3	40.0	33.9	33.9	38.4	32.3	32.3	36.6	30.6	30.6	34.7	28.7	28.7	32.5
					58	SHC	30.6	35.3	40.0	29.4	33.9	38.4	28.0	32.3	36.6	26.5	30.6	34.7	24.9	28.7	32.5
		62	TC		35.9	35.9	40.5	34.2	34.2	39.4	32.4	32.4	38.1	30.6	30.6	36.1	28.7	28.7	33.9		
			SHC		28.6	34.5	40.5	27.7	33.6	39.4	26.6	32.4	38.1	25.2	30.6	36.1	23.6	28.7	33.9		
		67	TC		39.3	39.3	39.3	37.3	37.3	37.3	35.2	35.2	35.2	32.9	32.9	32.9	30.5	30.5	31.6		
			SHC		23.1	29.1	35.2	22.3	28.3	34.4	21.4	27.5	33.5	20.5	26.6	32.6	19.5	25.6	31.6		
		72	TC	42.9	42.9	42.9	40.8	40.8	40.8	38.5	38.5	38.5	36.1	36.1	36.1	33.4	33.4	33.4			
			SHC	17.3	23.4	29.5	16.6	22.6	28.7	15.7	21.8	27.9	14.8	20.9	27.0	13.9	19.9	26.0			
		76	TC	-	45.9	45.9	-	43.7	43.7	-	41.3	41.3	-	38.7	38.7	-	35.9	35.9			
			SHC	-	18.8	25.1	-	18.0	24.3	-	17.2	23.4	-	16.3	22.5	-	15.4	21.5			
		1350	Cfm	EA (wB)	58	TC	36.6	36.6	41.5	35.1	35.1	39.7	33.4	33.4	37.9	31.6	31.6	35.8	29.6	29.6	33.6
					58	SHC	31.7	36.6	41.5	30.4	35.1	39.7	28.9	33.4	37.9	27.4	31.6	35.8	25.7	29.6	33.6
62	TC				36.7	36.7	43.2	35.1	35.1	41.3	33.4	33.4	39.4	31.6	31.6	37.3	29.6	29.6	34.9		
	SHC				30.2	36.7	43.2	28.8	35.1	41.3	27.5	33.4	39.4	26.0	31.6	37.3	24.4	29.6	34.9		
67	TC				39.9	39.9	39.9	37.9	37.9	37.9	35.8	35.8	35.9	33.4	33.4	34.9	30.9	30.9	33.9		
	SHC				24.2	30.9	37.6	23.4	30.1	36.8	22.5	29.2	35.9	21.6	28.3	34.9	20.6	27.2	33.9		
72	TC			43.6	43.6	43.6	41.4	41.4	41.4	39.1	39.1	39.1	36.6	36.6	36.6	33.9	33.9	33.9			
	SHC			17.8	24.5	31.3	17.0	23.7	30.5	16.1	22.9	29.6	15.2	22.0	28.7	14.3	21.0	27.7			
76	TC			-	46.7	46.7	-	44.4	44.4	-	41.9	41.9	-	39.2	39.2	-	36.3	36.3			
	SHC			-	19.4	26.3	-	18.6	25.5	-	17.8	24.6	-	16.9	23.7	-	15.9	22.7			
1500	Cfm			EA (wB)	58	TC	37.7	37.7	42.7	36.1	36.1	40.9	34.3	34.3	38.9	32.5	32.5	36.8	30.4	30.4	34.4
					58	SHC	32.6	37.7	42.7	31.3	36.1	40.9	29.8	34.3	38.9	28.1	32.5	36.8	26.3	30.4	34.4
		62	TC		37.7	37.7	44.4	36.1	36.1	42.5	34.4	34.4	40.5	32.5	32.5	38.3	30.4	30.4	35.8		
			SHC		31.0	37.7	44.4	29.7	36.1	42.5	28.3	34.4	40.5	26.7	32.5	38.3	25.0	30.4	35.8		
		67	TC		40.5	40.5	40.5	38.4	38.4	39.1	36.2	36.2	38.2	33.8	33.8	37.2	31.2	31.2	36.1		
			SHC		25.2	32.6	40.0	24.4	31.7	39.1	23.5	30.8	38.2	22.5	29.9	37.2	21.5	28.8	36.1		
		72	TC	44.2	44.2	44.2	41.9	41.9	41.9	39.6	39.6	39.6	37.0	37.0	37.0	34.2	34.2	34.2			
			SHC	18.2	25.6	33.0	17.4	24.8	32.2	16.5	23.9	31.3	15.6	23.0	30.4	14.7	22.0	29.4			
		76	TC	-	47.2	47.2	-	44.9	44.9	-	42.3	42.3	-	39.6	39.6	-	36.7	36.7			
			SHC	-	19.9	27.5	-	19.1	26.7	-	18.3	25.8	-	17.4	24.9	-	16.4	23.9			

LEGEND:

- Do not operate
- Cfm - Cubic feet per minute (supply air)
- EAT(db) - Entering air temperature (dry bulb)
- EAT(wb) - Entering air temperature (wet bulb)
- SHC - Sensible heat capacity
- TC - Total capacity

Table 8 (cont.) - COOLING CAPACITIES

1-STAGE COOLING

50HC04 (3 TONS) – UNIT WITH HUMIDI-MIZER SYSTEM IN SUBCOOLING MODE										
Temp (F) Air Ent Condenser (Edb)		AIR ENTERING EVAPORATOR – CFM								
		900			1200			1500		
		Air Entering Evaporator – Ewb (F)								
		72	67	62	72	67	62	72	67	62
75	TC	44.6	40.3	36.5	47.0	43.0	39.1	48.8	44.3	40.8
	SHC	19.8	24.5	29.3	22.6	29.1	35.3	25.4	33.0	40.4
	kW	2.02	1.97	1.93	1.96	2.00	2.05	2.08	2.02	1.98
85	TC	42.1	38.1	34.4	44.6	40.5	36.9	46.1	41.9	38.6
	SHC	17.5	22.5	27.4	20.4	26.8	33.2	22.9	30.8	38.2
	kW	2.28	2.23	2.19	2.22	2.26	2.31	2.33	2.28	2.24
95	TC	39.6	35.8	32.3	41.9	38.0	34.5	43.2	39.3	36.2
	SHC	15.2	20.3	25.5	17.8	24.5	31.1	20.2	28.4	35.9
	kW	2.56	2.51	2.47	2.50	2.54	2.60	2.62	2.56	2.52
105	TC	36.8	33.2	30.0	38.9	35.3	32.0	40.2	36.5	33.6
	SHC	12.7	18.1	23.4	15.1	22.0	28.8	17.5	25.8	33.6
	kW	2.88	2.83	2.79	2.82	2.86	2.91	2.93	2.88	2.84
115	TC	33.9	30.5	27.5	35.8	32.4	29.4	37.0	33.5	30.9
	SHC	10.1	15.7	21.2	12.3	19.5	26.4	14.5	23.1	30.9
	kW	3.23	3.19	3.15	3.17	3.21	3.26	3.28	3.23	3.19
125	TC	30.8	27.7	24.9	32.5	29.3	26.5	33.5	30.3	27.9
	SHC	7.3	13.1	18.9	9.4	16.7	23.9	11.4	20.3	27.9
	kW	3.62	3.59	3.56	3.57	3.60	3.65	3.66	3.62	3.59

50HC04 (3 TONS) – UNIT WITH HUMIDI-MIZER SYSTEM IN HOT GAS REHEAT MODE											
Temp (F) Air Ent Condenser (Edb)		AIR ENTERING EVAPORATOR - Ewb (F)									
		75 Dry Bulb			75 Dry Bulb			75 Dry Bulb			
		62.5 Wet Bulb			64 Wet Bulb			65.3 Wet Bulb			
		(50% Relative)			(56% Relative)			(60% Relative)			
		Air Entering Evaporator - Cfm									
900	1200	1500	900	1200	1500	900	1200	1500	900	1200	1500
80	TC	16.46	17.15	17.74	16.66	17.23	17.79	16.85	17.74	18.29	
	SHC	5.10	6.60	8.15	3.21	4.33	5.61	1.59	2.75	3.83	
	kW	1.94	2.01	2.02	2.04	2.13	2.15	2.12	2.14	2.16	
75	TC	16.61	17.52	18.09	17.18	18.09	18.67	17.69	18.61	19.19	
	SHC	5.24	6.96	8.48	3.71	5.15	6.45	2.40	3.59	4.69	
	kW	1.98	2.00	2.01	1.99	2.01	2.02	2.00	2.02	2.03	
70	TC	17.00	18.06	18.63	17.56	18.46	19.40	18.41	19.35	20.10	
	SHC	5.62	7.47	9.00	4.08	5.50	7.16	3.09	4.31	5.58	
	kW	1.96	1.94	1.96	1.97	2.00	1.94	1.91	1.94	1.92	
60	TC	17.63	18.49	19.37	18.17	19.38	19.95	18.66	19.52	20.46	
	SHC	6.21	7.89	9.71	4.66	6.39	7.68	3.31	4.45	5.90	
	kW	1.93	1.96	1.92	1.95	1.92	1.94	1.97	2.00	1.96	
50	TC	17.82	18.59	19.72	18.31	19.73	20.26	18.76	20.21	20.73	
	SHC	6.40	7.99	10.05	4.79	6.71	7.97	3.40	5.11	6.16	
	kW	1.98	2.03	1.94	2.01	1.94	1.97	2.03	1.96	1.99	
40	TC	17.70	19.38	19.85	19.10	20.30	20.34	19.53	20.76	21.26	
	SHC	6.30	8.74	10.17	5.54	7.26	8.05	4.13	5.64	6.67	
	kW	2.07	1.95	1.99	1.93	1.91	2.02	1.96	1.94	1.97	

LEGEND

- Edb** – Entering Dry–Bulb
- Ewb** – Entering Wet–Bulb
- kW** – Compressor Motor Power Input
- ldb** – Leaving Dry–Bulb
- lwb** – Leaving Wet–Bulb
- SHC** – Sensible Heat Capacity (1000 Btuh) Gross
- TC** – Total Capacity (1000 Btuh) Gross

NOTES:

1. Direct interpolation is permissible. Do not extrapolate.
2. The following formulas may be used:

$$t_{ldb} = t_{edb} - \frac{\text{sensible capacity (Btuh)}}{1.10 \times \text{cfm}}$$

t_{lwb} = Wet–bulb temperature corresponding to enthalpy of air leaving evaporator coil (h_{lwb})

$$h_{lwb} = h_{ewb} - \frac{\text{total capacity (Btuh)}}{4.5 \times \text{cfm}}$$

Where: h_{ewb} = Enthalpy of air entering evaporator coil

Table 8 (cont.) - COOLING CAPACITIES

1-STAGE COOLING

50HC*A05				AMBIENT TEMPERATURE															
				85			95			105			115			125			
				EA (dB)			EA (dB)			EA (dB)			EA (dB)			EA (dB)			
				75	80	85	75	80	85	75	80	85	75	80	85	75	80	85	
1200 Cfm	EA (wB)	58	TC	43.2	43.2	49.1	41.5	41.5	47.2	39.7	39.7	45.1	37.7	37.7	42.9	35.6	35.6	40.4	
			SHC	37.3	43.2	49.1	35.9	41.5	47.2	34.3	39.7	45.1	32.6	37.7	42.9	30.7	35.6	40.4	
		62	TC	45.9	45.9	46.0	43.7	43.7	45.0	41.3	41.3	43.8	38.8	38.8	42.6	36.0	36.0	41.2	
			SHC	33.5	39.8	46.0	32.5	38.7	45.0	31.3	37.6	43.8	30.1	36.3	42.6	28.8	35.0	41.2	
		67	TC	50.5	50.5	50.5	48.0	48.0	48.0	45.4	45.4	45.4	42.6	42.6	42.6	39.6	39.6	39.6	
			SHC	27.9	34.1	40.4	26.8	33.1	39.4	25.7	32.0	38.2	24.5	30.8	37.1	23.2	29.5	35.8	
	72	TC	55.4	55.4	55.4	52.7	52.7	52.7	49.9	49.9	49.9	46.8	46.8	46.8	43.5	43.5	43.5		
		SHC	22.0	28.4	34.7	21.0	27.3	33.7	19.9	26.2	32.5	18.7	25.0	31.3	17.4	23.8	30.1		
	76	TC	-	59.7	59.7	-	56.8	56.8	-	53.7	53.7	-	50.4	50.4	-	46.8	46.8		
		SHC	-	23.6	30.2	-	22.6	29.2	-	21.5	28.1	-	20.3	26.8	-	19.1	25.5		
	1400 Cfm	EA (wB)	58	TC	45.6	45.6	51.9	43.8	43.8	49.8	41.9	41.9	47.6	39.7	39.7	45.1	37.3	37.3	42.4
				SHC	39.4	45.6	51.9	37.9	43.8	49.8	36.2	41.9	47.6	34.3	39.7	45.1	32.3	37.3	42.4
62			TC	47.4	47.4	50.5	45.1	45.1	49.3	42.6	42.6	48.0	40.0	40.0	46.5	37.4	37.4	44.2	
			SHC	36.0	43.2	50.5	34.9	42.1	49.3	33.7	40.9	48.0	32.4	39.5	46.5	30.6	37.4	44.2	
67			TC	52.1	52.1	52.1	49.5	49.5	49.5	46.7	46.7	46.7	43.7	43.7	43.7	40.5	40.5	40.5	
			SHC	29.5	36.8	44.0	28.4	35.7	42.9	27.3	34.5	41.8	26.0	33.3	40.5	24.7	32.0	39.2	
72		TC	57.1	57.1	57.1	54.3	54.3	54.3	51.2	51.2	51.2	48.0	48.0	48.0	44.5	44.5	44.5		
		SHC	22.8	30.1	37.4	21.7	29.0	36.3	20.5	27.8	35.1	19.3	26.6	33.9	18.0	25.3	32.6		
76		TC	-	61.4	61.4	-	58.3	58.3	-	55.1	55.1	-	51.6	51.6	-	47.8	47.8		
		SHC	-	24.6	32.2	-	23.5	31.1	-	22.4	29.9	-	21.2	28.7	-	19.9	27.4		
1600 Cfm		EA (wB)	58	TC	47.7	47.7	54.2	45.8	45.8	52.0	43.7	43.7	49.6	41.3	41.3	47.0	38.8	38.8	44.1
				SHC	41.2	47.7	54.2	39.5	45.8	52.0	37.7	43.7	49.6	35.7	41.3	47.0	33.5	38.8	44.1
	62		TC	48.7	48.7	54.5	46.3	46.3	53.2	43.7	43.7	51.7	41.4	41.4	48.9	38.8	38.8	45.9	
			SHC	38.3	46.4	54.5	37.1	45.2	53.2	35.8	43.7	51.7	33.9	41.4	48.9	31.8	38.8	45.9	
	67		TC	53.3	53.3	53.3	50.6	50.6	50.6	47.7	47.7	47.7	44.6	44.6	44.6	41.2	41.2	42.6	
			SHC	31.0	39.2	47.5	29.9	38.1	46.3	28.7	37.0	45.2	27.5	35.7	43.9	26.2	34.4	42.6	
	72	TC	58.4	58.4	58.4	55.4	55.4	55.4	52.3	52.3	52.3	48.9	48.9	48.9	45.2	45.2	45.2		
		SHC	23.4	31.7	39.9	22.3	30.6	38.8	21.1	29.4	37.6	19.9	28.2	36.4	18.6	26.8	35.1		
	76	TC	-	62.7	62.7	-	59.5	59.5	-	56.1	56.1	-	52.5	52.5	-	48.6	48.6		
		SHC	-	25.5	34.0	-	24.4	32.9	-	23.2	31.7	-	22.0	30.4	-	20.7	29.1		
	1800 Cfm	EA (wB)	58	TC	49.5	49.5	56.2	47.4	47.4	53.9	45.2	45.2	51.3	42.7	42.7	48.5	40.1	40.1	45.5
				SHC	42.8	49.5	56.2	41.0	47.4	53.9	39.0	45.2	51.3	36.9	42.7	48.5	34.6	40.1	45.5
62			TC	49.8	49.8	58.1	47.5	47.5	56.1	45.2	45.2	53.4	42.8	42.8	50.5	40.1	40.1	47.4	
			SHC	40.4	49.2	58.1	38.8	47.5	56.1	37.0	45.2	53.4	35.0	42.8	50.5	32.8	40.1	47.4	
67			TC	54.3	54.3	54.3	51.5	51.5	51.5	48.5	48.5	48.5	45.3	45.3	47.1	41.8	41.8	45.7	
			SHC	32.5	41.7	50.8	31.4	40.5	49.7	30.2	39.3	48.5	28.9	38.0	47.1	27.5	36.6	45.7	
72		TC	59.4	59.4	59.4	56.3	56.3	56.3	53.1	53.1	53.1	49.6	49.6	49.6	45.8	45.8	45.8		
		SHC	24.0	33.2	42.4	22.9	32.1	41.3	21.7	30.9	40.1	20.4	29.6	38.8	19.1	28.3	37.5		
76		TC	-	63.8	63.8	-	60.5	60.5	-	57.0	57.0	-	53.2	53.2	-	49.2	49.2		
		SHC	-	26.3	35.8	-	25.2	34.6	-	24.0	33.4	-	22.8	32.1	-	21.5	30.8		
2000 Cfm		EA (wB)	58	TC	51.0	51.0	58.0	48.8	48.8	55.5	46.5	46.5	52.8	43.9	43.9	49.9	41.1	41.1	46.7
				SHC	44.1	51.0	58.0	42.2	48.8	55.5	40.2	46.5	52.8	37.9	43.9	49.9	35.5	41.1	46.7
	62		TC	51.1	51.1	60.4	48.9	48.9	57.8	46.5	46.5	55.0	44.0	44.0	51.9	41.1	41.1	48.6	
			SHC	41.8	51.1	60.4	40.0	48.9	57.8	38.1	46.5	55.0	36.0	44.0	51.9	33.7	41.1	48.6	
	67		TC	55.1	55.1	55.1	52.1	52.1	52.9	49.1	49.1	51.6	45.8	45.8	50.2	42.3	42.3	48.7	
			SHC	33.9	44.0	54.1	32.7	42.8	52.9	31.5	41.5	51.6	30.2	40.2	50.2	28.8	38.8	48.7	
	72	TC	60.3	60.3	60.3	57.1	57.1	57.1	53.7	53.7	53.7	50.1	50.1	50.1	46.3	46.3	46.3		
		SHC	24.5	34.7	44.8	23.4	33.5	43.6	22.2	32.3	42.4	21.0	31.1	41.2	19.6	29.7	39.8		
	76	TC	-	64.6	64.6	-	61.2	61.2	-	57.6	57.6	-	53.8	53.8	-	49.7	49.7		
		SHC	-	27.1	37.5	-	26.0	36.3	-	24.8	35.1	-	23.5	33.8	-	22.2	32.4		

LEGEND:

- Do not operate
- Cfm - Cubic feet per minute (supply air)
- EAT(db) - Entering air temperature (dry bulb)
- EAT(wb) - Entering air temperature (wet bulb)
- SHC - Sensible heat capacity
- TC - Total capacity

Table 8 (cont.) - COOLING CAPACITIES

1-STAGE COOLING

50HC05 (4 TONS) – UNIT WITH HUMIDI-MIZER IN SUBCOOLING MODE										
Temp (F) Air Ent Condenser (Edb)		AIR ENTERING EVAPORATOR – CFM								
		1200			1600			2000		
		Air Entering Evaporator – Ewb (F)								
		72	67	62	72	67	62	72	67	62
75	TC	57.8	52.3	47.2	61.5	55.6	50.6	63.7	57.9	0.0
	SHC	24.2	30.5	36.8	27.9	35.9	44.0	31.2	40.9	0.0
	kW	2.50	2.47	2.44	2.46	2.48	2.51	2.53	2.50	0.00
85	TC	54.1	48.9	44.1	57.1	52.0	47.3	59.6	54.0	49.5
	SHC	20.7	27.3	33.9	23.9	32.6	41.0	27.3	37.3	47.1
	kW	2.81	2.78	2.76	2.78	2.80	2.82	2.84	2.81	2.79
95	TC	50.1	45.3	40.8	53.3	48.2	43.7	55.2	50.1	45.8
	SHC	17.0	24.0	30.9	20.4	29.1	37.7	23.3	33.6	43.6
	kW	3.16	3.14	3.12	3.13	3.15	3.18	3.19	3.16	3.14
105	TC	45.7	41.1	37.2	48.6	43.8	39.8	50.5	45.5	41.8
	SHC	12.9	20.1	27.6	16.0	25.0	34.1	19.0	29.4	39.9
	kW	3.56	3.54	3.52	3.54	3.55	3.58	3.59	3.56	3.55
115	TC	41.1	37.0	33.2	43.5	39.2	35.5	45.4	41.1	37.5
	SHC	8.7	16.4	23.9	11.3	20.7	30.1	14.3	25.4	35.8
	kW	4.02	4.01	4.00	4.00	4.01	4.03	4.04	4.03	4.01
125	TC	36.3	32.5	29.0	38.6	34.7	31.2	40.2	36.1	32.9
	SHC	4.3	12.2	20.1	6.8	16.6	26.2	9.4	20.8	31.5
	kW	4.54	4.53	4.53	4.53	4.54	4.54	4.55	4.54	4.54

50HC05 (4 TONS) – UNIT WITH HUMIDI-MIZER SYSTEM IN HOT GAS REHEAT MODE										
Temp (F) Air Ent Condenser (Edb)		AIR ENTERING EVAPORATOR – Ewb (F)								
		75 Dry Bulb			75 Dry Bulb			75 Dry Bulb		
		62.5 Wet Bulb			64 Wet Bulb			65.3 Wet Bulb		
		(50% Relative)			(56% Relative)			(60% Relative)		
		Air Entering Evaporator – Cfm								
1200	1600	2000	1200	1600	2000	1200	1600	2000		
80	TC	18.64	19.95	20.78	19.35	20.71	21.51	20.00	21.37	22.33
	SHC	0.78	4.36	8.24	-1.95	1.01	4.29	-4.33	-1.91	0.99
	kW	2.66	2.68	2.69	2.67	2.69	2.69	2.68	2.69	2.68
75	TC	19.37	21.21	22.15	20.47	21.97	22.92	21.15	22.78	23.65
	SHC	1.48	5.52	9.49	-0.91	2.18	5.57	-3.26	-0.61	2.20
	kW	2.62	2.54	2.54	2.56	2.55	2.55	2.56	2.55	2.56
70	TC	19.92	21.63	22.64	20.77	22.52	23.61	21.70	23.39	24.26
	SHC	2.01	5.94	9.98	-0.61	2.70	6.23	-2.72	-0.02	2.78
	kW	2.60	2.56	2.54	2.58	2.54	2.53	2.54	2.52	2.54
60	TC	20.11	21.27	22.23	20.75	23.15	23.43	22.49	23.78	24.55
	SHC	2.24	5.70	9.70	-0.57	3.35	6.15	-1.95	0.40	3.13
	kW	2.69	2.74	2.73	2.72	2.58	2.68	2.56	2.60	2.63
50	TC	21.56	22.70	23.37	22.18	23.33	24.01	22.75	23.90	25.40
	SHC	3.61	7.03	10.76	0.78	3.57	6.73	-1.67	0.57	3.96
	kW	2.57	2.63	2.66	2.60	2.66	2.69	2.63	2.69	2.62
40	TC	21.67	23.23	24.04	22.76	23.82	25.57	23.28	24.34	26.13
	SHC	3.74	7.56	9.89	1.35	4.06	8.17	-1.15	1.01	4.67
	kW	2.64	2.64	2.69	2.61	2.67	2.58	2.64	2.70	2.61

LEGEND

- Edb – Entering Dry–Bulb
- Ewb – Entering Wet–Bulb
- kW – Compressor Motor Power Input
- ldb – Leaving Dry–Bulb
- lwb – Leaving Wet–Bulb
- SHC – Sensible Heat Capacity (1000 Btuh) Gross
- TC – Total Capacity (1000 Btuh) Gross

NOTES:

1. Direct interpolation is permissible. Do not extrapolate.
2. The following formulas may be used:

$$t_{ldb} = t_{edb} - \frac{\text{sensible capacity (Btuh)}}{1.10 \times \text{cfm}}$$

t_{lwb} = Wet–bulb temperature corresponding to enthalpy of air leaving evaporator coil (h_{lwb})

$$h_{lwb} = h_{ewb} - \frac{\text{total capacity (Btuh)}}{4.5 \times \text{cfm}}$$

Where: h_{ewb} = Enthalpy of air entering evaporator coil

Table 8 (cont.) - COOLING CAPACITIES

1-STAGE COOLING

50HC*A06			AMBIENT TEMPERATURE																
			85			95			105			115			125				
			EA (dB)			EA (dB)			EA (dB)			EA (dB)			EA (dB)				
			75	80	85	75	80	85	75	80	85	75	80	85	75	80	85		
1500 Cfm	EA (wB)	58	TC	53.4	53.4	60.6	51.3	51.3	58.2	49.0	49.0	55.6	46.5	46.5	52.7	43.7	43.7	49.5	
			SHC	46.3	53.4	60.6	44.5	51.3	58.2	42.5	49.0	55.6	40.3	46.5	52.7	37.9	43.7	49.5	
		62	TC	55.6	55.6	58.2	52.9	52.9	56.9	50.0	50.0	55.5	46.9	46.9	53.9	43.8	43.8	51.6	
			SHC	42.0	50.1	58.2	40.7	48.8	56.9	39.4	47.4	55.5	37.9	45.9	53.9	36.0	43.8	51.6	
		67	TC	60.8	60.8	60.8	57.8	57.8	57.8	54.6	54.6	54.6	51.1	51.1	51.1	47.4	47.4	47.4	
			SHC	34.4	42.6	50.7	33.2	41.3	49.4	31.8	39.9	48.1	30.4	38.5	46.6	28.9	37.0	45.1	
	72	TC	66.6	66.6	66.6	63.2	63.2	63.2	59.7	59.7	59.7	55.9	55.9	55.9	51.8	51.8	51.8		
		SHC	26.7	34.8	43.0	25.4	33.6	41.7	24.1	32.2	40.4	22.6	30.8	38.9	21.1	29.3	37.4		
	76	TC	-	71.4	71.4	-	67.9	67.9	-	64.0	64.0	-	59.9	59.9	-	55.5	55.5		
		SHC	-	28.5	36.7	-	27.2	35.5	-	25.9	34.2	-	24.5	32.7	-	23.0	31.3		
	1750 Cfm	EA (wB)	58	TC	56.3	56.3	63.8	54.0	54.0	61.2	51.5	51.5	58.3	48.7	48.7	55.2	45.7	45.7	51.8
				SHC	48.8	56.3	63.8	46.8	54.0	61.2	44.6	51.5	58.3	42.2	48.7	55.2	39.6	45.7	51.8
62			TC	57.3	57.3	64.0	54.5	54.5	62.5	51.6	51.6	60.7	48.8	48.8	57.5	45.8	45.8	53.9	
			SHC	45.3	54.7	64.0	44.0	53.3	62.5	42.4	51.6	60.7	40.1	48.8	57.5	37.6	45.8	53.9	
67			TC	62.5	62.5	62.5	59.3	59.3	59.3	55.9	55.9	55.9	52.3	52.3	52.3	48.3	48.3	49.7	
			SHC	36.6	46.0	55.4	35.3	44.7	54.1	33.9	43.3	52.7	32.4	41.8	51.3	30.9	40.3	49.7	
72		TC	68.3	68.3	68.3	64.8	64.8	64.8	61.0	61.0	61.0	57.0	57.0	57.0	52.7	52.7	52.7		
		SHC	27.5	37.0	46.5	26.2	35.7	45.2	24.9	34.4	43.8	23.4	32.9	42.4	21.9	31.4	40.8		
76		TC	-	73.2	73.2	-	69.4	69.4	-	65.4	65.4	-	61.1	61.1	-	56.5	56.5		
		SHC	-	29.7	39.3	-	28.4	38.0	-	27.1	36.7	-	25.6	35.2	-	24.1	33.7		
2000 Cfm		EA (wB)	58	TC	58.7	58.7	66.5	56.2	56.2	63.7	53.5	53.5	60.6	50.6	50.6	57.3	47.3	47.3	53.7
				SHC	50.9	58.7	66.5	48.7	56.2	63.7	46.4	53.5	60.6	43.8	50.6	57.3	41.0	47.3	53.7
	62		TC	58.8	58.8	69.2	56.3	56.3	66.3	53.6	53.6	63.1	50.6	50.6	59.6	47.4	47.4	55.8	
			SHC	48.3	58.8	69.2	46.3	56.3	66.3	44.0	53.6	63.1	41.6	50.6	59.6	39.0	47.4	55.8	
	67		TC	63.8	63.8	63.8	60.4	60.4	60.4	56.9	56.9	57.3	53.1	53.1	55.8	49.1	49.1	54.1	
			SHC	38.6	49.3	60.1	37.3	48.0	58.7	35.9	46.6	57.3	34.4	45.1	55.8	32.8	43.4	54.1	
	72	TC	69.6	69.6	69.6	65.9	65.9	65.9	62.1	62.1	62.1	57.9	57.9	57.9	53.5	53.5	53.5		
		SHC	28.4	39.1	49.9	27.0	37.8	48.6	25.7	36.4	47.2	24.2	35.0	45.7	22.6	33.4	44.2		
	76	TC	-	74.5	74.5	-	70.6	70.6	-	66.5	66.5	-	62.0	62.0	-	-	-		
		SHC	-	30.8	41.8	-	29.5	40.4	-	28.2	39.0	-	26.7	37.6	-	-	-		
	2250 Cfm	EA (wB)	58	TC	60.7	60.7	68.8	58.1	58.1	65.8	55.2	55.2	62.6	52.1	52.1	59.1	48.7	48.7	55.2
				SHC	52.6	60.7	68.8	50.3	58.1	65.8	47.9	55.2	62.6	45.2	52.1	59.1	42.2	48.7	55.2
62			TC	60.8	60.8	71.6	58.1	58.1	68.5	55.3	55.3	65.1	52.2	52.2	61.4	48.7	48.7	57.4	
			SHC	50.0	60.8	71.6	47.8	58.1	68.5	45.4	55.3	65.1	42.9	52.2	61.4	40.1	48.7	57.4	
67			TC	64.7	64.7	64.7	61.3	61.3	63.2	57.7	57.7	61.7	53.8	53.8	60.1	49.7	49.7	58.3	
			SHC	40.6	52.6	64.5	39.2	51.2	63.2	37.8	49.7	61.7	36.2	48.2	60.1	34.6	46.5	58.3	
72		TC	70.6	70.6	70.6	66.8	66.8	66.8	62.8	62.8	62.8	58.6	58.6	58.6	54.0	54.0	54.0		
		SHC	29.1	41.2	53.3	27.8	39.9	51.9	26.4	38.4	50.5	24.9	37.0	49.0	23.3	35.4	47.4		
76		TC	-	75.6	75.6	-	71.6	71.6	-	67.3	67.3	-	-	-	-	-	-		
		SHC	-	31.9	44.1	-	30.6	42.8	-	29.2	41.4	-	-	-	-	-	-		
2500 Cfm		EA (wB)	58	TC	62.5	62.5	70.8	59.7	59.7	67.6	56.7	56.7	64.2	53.4	53.4	60.5	49.9	49.9	56.5
				SHC	54.1	62.5	70.8	51.7	59.7	67.6	49.1	56.7	64.2	46.3	53.4	60.5	43.2	49.9	56.5
	62		TC	62.5	62.5	73.6	59.7	59.7	70.3	56.7	56.7	66.8	53.5	53.5	63.0	49.9	49.9	58.8	
			SHC	51.4	62.5	73.6	49.1	59.7	70.3	46.6	56.7	66.8	43.9	53.5	63.0	41.0	49.9	58.8	
	67		TC	65.5	65.5	68.9	62.0	62.0	67.4	58.3	58.3	65.9	54.4	54.4	64.2	50.2	50.2	62.2	
			SHC	42.5	55.7	68.9	41.1	54.3	67.4	39.6	52.7	65.9	38.0	51.1	64.2	36.3	49.2	62.2	
	72	TC	71.4	71.4	71.4	67.5	67.5	67.5	63.4	63.4	63.4	59.1	59.1	59.1	54.4	54.4	54.4		
		SHC	29.9	43.2	56.5	28.5	41.8	55.2	27.1	40.4	53.7	25.6	38.9	52.2	24.0	37.3	50.6		
	76	TC	-	76.4	76.4	-	72.3	72.3	-	-	-	-	-	-	-	-	-		
		SHC	-	33.0	46.4	-	31.6	45.1	-	-	-	-	-	-	-	-	-		

LEGEND:

- Do not operate
- Cfm - Cubic feet per minute (supply air)
- EAT(db) - Entering air temperature (dry bulb)
- EAT(wb) - Entering air temperature (wet bulb)
- SHC - Sensible heat capacity
- TC - Total capacity

Table 8 (cont.) - COOLING CAPACITIES

1-STAGE COOLING

50HC06 (5 TONS) – UNIT WITH HUMIDI-MIZER IN SUBCOOLING MODE										
Temp (F) Air Ent Condenser (Edb)		AIR ENTERING EVAPORATOR – CFM								
		1500			2000			2500		
		Air Entering Evaporator – Ewb (F)								
		72	67	62	72	67	62	72	67	62
75	TC	66.9	60.3	54.8	71.0	64.4	58.6	73.5	66.9	61.6
	SHC	25.8	34.1	43.0	30.5	41.7	52.6	35.0	48.6	61.2
	kW	3.11	3.06	3.03	3.05	3.09	3.16	3.16	3.11	3.07
85	TC	62.4	56.5	51.2	66.3	60.1	54.7	68.2	62.3	57.5
	SHC	21.5	30.6	39.6	26.1	37.6	49.0	29.9	44.2	57.2
	kW	3.47	3.43	3.39	3.42	3.46	3.51	3.52	3.48	3.44
95	TC	57.8	52.3	47.3	61.3	55.6	50.6	63.5	57.7	53.2
	SHC	17.2	26.6	35.9	21.4	33.3	45.1	25.6	39.9	53.2
	kW	3.89	3.85	3.80	3.83	3.88	3.93	3.95	3.90	3.86
105	TC	52.8	47.5	42.9	55.4	50.0	45.3	58.0	52.2	47.9
	SHC	12.5	22.1	31.7	15.8	28.1	40.1	20.4	34.7	47.9
	kW	4.36	4.31	4.26	4.29	4.33	4.38	4.42	4.36	4.32
115	TC	47.4	42.8	38.6	50.1	45.2	41.1	51.8	47.1	43.4
	SHC	7.4	17.7	27.8	11.0	23.6	36.1	14.7	30.0	43.4
	kW	4.88	4.83	4.78	4.81	4.86	4.91	4.93	4.88	4.84
125	TC	41.6	37.5	33.8	44.0	39.7	35.8	45.8	41.3	38.0
	SHC	2.1	12.8	23.3	5.3	18.6	31.2	9.1	24.7	38.0
	kW	5.44	5.39	5.35	5.37	5.42	5.47	5.49	5.44	5.40

50HC06 (5 TONS) – UNIT WITH HUMIDI-MIZER SYSTEM IN HOT GAS REHEAT MODE										
Temp (F) Air Ent Condenser (Edb)		AIR ENTERING EVAPORATOR – Ewb (F)								
		75 Dry Bulb			75 Dry Bulb			75 Dry Bulb		
		62.5 Wet Bulb			64 Wet Bulb			65.3 Wet Bulb		
		(50% Relative)			(56% Relative)			(60% Relative)		
		Air Entering Evaporator – Cfm								
1500	2000	2500	1500	2000	2500	1500	2000	2500		
80	TC	25.29	27.61	28.72	26.81	28.62	29.71	27.68	29.53	30.63
	SHC	5.06	10.68	15.86	2.37	6.73	11.22	-0.40	3.30	7.17
	kW	3.23	3.12	3.13	3.12	3.13	3.14	3.12	3.14	3.15
75	TC	26.69	28.45	29.73	27.65	29.64	30.73	28.53	30.55	31.65
	SHC	6.39	11.52	16.85	3.20	7.72	12.20	0.43	4.29	8.16
	kW	3.08	3.11	3.09	3.10	3.09	3.11	3.11	3.10	3.12
70	TC	27.04	29.08	30.15	28.29	30.04	31.09	29.13	30.91	31.97
	SHC	6.76	12.14	17.28	3.82	8.14	12.60	1.02	4.67	8.51
	kW	3.15	3.12	3.15	3.11	3.14	3.17	3.13	3.16	3.18
60	TC	27.99	29.57	31.33	28.86	30.46	32.25	29.63	32.44	33.81
	SHC	7.70	12.66	18.45	4.41	8.60	13.74	1.54	6.16	10.28
	kW	3.17	3.23	3.15	3.21	3.26	3.18	3.23	3.12	3.10
50	TC	30.09	31.66	32.64	30.93	32.57	33.53	31.73	33.38	34.35
	SHC	9.72	14.66	19.72	6.40	10.61	14.99	3.56	7.10	10.85
	kW	3.01	3.07	3.11	3.04	3.10	3.15	3.07	3.14	3.18
40	TC	28.39	30.78	32.67	31.13	32.60	34.40	31.86	33.33	36.07
	SHC	8.17	13.89	19.80	6.63	10.69	15.85	3.72	7.10	12.51
	kW	3.39	3.32	3.24	3.14	3.23	3.15	3.18	3.27	3.08

LEGEND

- Edb – Entering Dry–Bulb
- Ewb – Entering Wet–Bulb
- kW – Compressor Motor Power Input
- ldb – Leaving Dry–Bulb
- lwb – Leaving Wet–Bulb
- SHC – Sensible Heat Capacity (1000 Btuh) Gross
- TC – Total Capacity (1000 Btuh) Gross

NOTES:

1. Direct interpolation is permissible. Do not extrapolate.
2. The following formulas may be used:

$$t_{ldb} = t_{edb} - \frac{\text{sensible capacity (Btuh)}}{1.10 \times \text{cfm}}$$

t_{lwb} = Wet–bulb temperature corresponding to enthalpy of air leaving evaporator coil (h_{lwb})

$$h_{lwb} = h_{ewb} - \frac{\text{total capacity (Btuh)}}{4.5 \times \text{cfm}}$$

Where: h_{ewb} = Enthalpy of air entering evaporator coil

Table 8 (cont.) - COOLING CAPACITIES

1-STAGE COOLING

50HC*A07			AMBIENT TEMPERATURE																
			85			95			105			115			125				
			EA (dB)			EA (dB)			EA (dB)			EA (dB)			EA (dB)				
			75	80	85	75	80	85	75	80	85	75	80	85	75	80	85		
1800 Cfm	EA (wB)	58	TC	64.1	64.1	72.5	61.8	61.8	69.9	59.2	59.2	67	56.3	56.3	63.7	53.2	53.2	60.2	
			SHC	55.7	64.1	72.5	53.7	61.8	69.9	51.4	59.2	67	48.9	56.3	63.7	46.2	53.2	60.2	
		62	TC	67.9	67.9	68.5	64.9	64.9	67	61.5	61.5	65.3	57.9	57.9	63.5	54	54	61.4	
			SHC	50.2	59.4	68.5	48.8	57.9	67	47.1	56.2	65.3	45.4	54.4	63.5	43.4	52.4	61.4	
		67	TC	74.8	74.8	74.8	71.5	71.5	71.5	67.8	67.8	67.8	63.8	63.8	63.8	59.5	59.5	59.5	
			SHC	41.8	50.9	60.1	40.3	49.5	58.7	38.8	47.9	57.1	37.1	46.2	55.4	35.3	44.4	53.6	
	72	TC	82.2	82.2	82.2	78.7	78.7	78.7	74.7	74.7	74.7	70.4	70.4	70.4	65.6	65.6	65.6		
		SHC	33	42.3	51.6	31.6	40.9	50.2	30.1	39.3	48.6	28.4	37.7	46.9	26.7	35.9	45.1		
	76	TC	-	88.7	88.7	-	84.8	84.8	-	80.6	80.6	-	76	76	-	70.9	70.9		
		SHC	-	35.3	45.2	-	33.9	43.7	-	32.4	42	-	30.7	40.3	-	28.9	38.5		
	2100 Cfm	EA (wB)	58	TC	67.6	67.6	76.5	65.1	65.1	73.7	62.3	62.3	70.5	59.3	59.3	67.1	55.9	55.9	63.2
				SHC	58.7	67.6	76.5	56.6	65.1	73.7	54.1	62.3	70.5	51.5	59.3	67.1	48.5	55.9	63.2
62			TC	70.1	70.1	74.9	67	67	73.2	63.5	63.5	71.3	59.7	59.7	69.1	56	56	65.8	
			SHC	53.9	64.4	74.9	52.4	62.8	73.2	50.6	61	71.3	48.7	58.9	69.1	46.2	56	65.8	
67			TC	77.1	77.1	77.1	73.6	73.6	73.6	69.7	69.7	69.7	65.5	65.5	65.5	60.9	60.9	60.9	
			SHC	44.2	54.8	65.3	42.7	53.3	63.9	41.2	51.7	62.3	39.4	50	60.5	37.6	48.1	58.6	
72		TC	84.7	84.7	84.7	80.9	80.9	80.9	76.8	76.8	76.8	72.2	72.2	72.2	67.2	67.2	67.2		
		SHC	34.2	44.8	55.5	32.7	43.4	54	31.1	41.8	52.4	29.5	40.1	50.7	27.6	38.2	48.8		
76		TC	-	91.3	91.3	-	87.2	87.2	-	82.7	82.7	-	77.8	77.8	-	72.5	72.5		
		SHC	-	36.7	47.8	-	35.3	46.3	-	33.7	44.7	-	32	43	-	30.2	41.1		
2400 Cfm		EA (wB)	58	TC	70.6	70.6	79.9	68	68	76.9	65	65	73.5	61.7	61.7	69.8	58.1	58.1	65.8
				SHC	61.3	70.6	79.9	59	68	76.9	56.4	65	73.5	53.6	61.7	69.8	50.5	58.1	65.8
	62		TC	72	72	80.6	68.7	68.7	78.7	65.2	65.2	76.6	61.8	61.8	72.6	58.2	58.2	68.4	
			SHC	57.3	69	80.6	55.6	67.2	78.7	53.7	65.2	76.6	50.9	61.8	72.6	48	58.2	68.4	
	67		TC	78.9	78.9	78.9	75.2	75.2	75.2	71.2	71.2	71.2	66.8	66.8	66.8	62	62	63.4	
			SHC	46.5	58.4	70.3	45	56.9	68.8	43.4	55.3	67.2	41.6	53.5	65.4	39.7	51.6	63.4	
	72	TC	86.6	86.6	86.6	82.7	82.7	82.7	78.3	78.3	78.3	73.6	73.6	73.6	68.4	68.4	68.4		
		SHC	35.2	47.2	59.2	33.7	45.7	57.7	32.1	44.1	56	30.4	42.3	54.3	28.5	40.5	52.4		
	76	TC	-	93.3	93.3	-	89	89	-	84.4	84.4	-	79.3	79.3	-	73.7	73.7		
		SHC	-	38	50.4	-	36.6	48.9	-	35	47.3	-	33.3	45.5	-	31.4	43.6		
	2700 Cfm	EA (wB)	58	TC	73.2	73.2	82.8	70.4	70.4	79.6	67.3	67.3	76.1	63.8	63.8	72.2	60	60	67.9
				SHC	63.6	73.2	82.8	61.1	70.4	79.6	58.4	67.3	76.1	55.4	63.8	72.2	52.1	60	67.9
62			TC	73.7	73.7	85.5	70.5	70.5	82.8	67.3	67.3	79.1	63.9	63.9	75.1	60.1	60.1	70.6	
			SHC	60.2	72.9	85.5	58.1	70.5	82.8	55.5	67.3	79.1	52.7	63.9	75.1	49.5	60.1	70.6	
67			TC	80.3	80.3	80.3	76.5	76.5	76.5	72.4	72.4	72.4	67.8	67.8	70	62.9	62.9	67.9	
			SHC	48.7	61.9	75.1	47.1	60.4	73.6	45.5	58.7	71.9	43.7	56.8	70	41.7	54.8	67.9	
72		TC	88.2	88.2	88.2	84	84	84	79.6	79.6	79.6	74.6	74.6	74.6	69.3	69.3	69.3		
		SHC	36.1	49.4	62.7	34.6	47.9	61.2	33	46.2	59.5	31.2	44.5	57.7	29.3	42.6	55.8		
76		TC	-	94.9	94.9	-	90.4	90.4	-	85.6	85.6	-	80.4	80.4	-	74.7	74.7		
		SHC	-	39.2	52.9	-	37.7	51.4	-	36.1	49.7	-	34.4	47.9	-	32.5	46		
3000 Cfm		EA (wB)	58	TC	75.4	75.4	85.3	72.5	72.5	82	69.2	69.2	78.3	65.6	65.6	74.2	61.7	61.7	69.8
				SHC	65.5	75.4	85.3	62.9	72.5	82	60.1	69.2	78.3	57	65.6	74.2	53.5	61.7	69.8
	62		TC	75.5	75.5	88.7	72.5	72.5	85.3	69.3	69.3	81.4	65.7	65.7	77.2	61.7	61.7	72.5	
			SHC	62.2	75.5	88.7	59.8	72.5	85.3	57.1	69.3	81.4	54.1	65.7	77.2	50.9	61.7	72.5	
	67		TC	81.4	81.4	81.4	77.5	77.5	78.1	73.3	73.3	76.4	68.7	68.7	74.4	63.7	63.7	72.2	
			SHC	50.7	65.2	79.7	49.2	63.7	78.1	47.5	61.9	76.4	45.6	60	74.4	43.6	57.9	72.2	
	72	TC	89.4	89.4	89.4	85.2	85.2	85.2	80.5	80.5	80.5	75.5	75.5	75.5	70.1	70.1	70.1		
		SHC	36.9	51.5	66.1	35.4	50	64.6	33.8	48.3	62.9	32	46.5	61.1	30.1	44.6	59.1		
	76	TC	-	96.1	96.1	-	91.6	91.6	-	86.7	86.7	-	81.3	81.3	-	75.5	75.5		
		SHC	-	40.4	55.3	-	38.9	53.8	-	37.2	52.1	-	35.5	50.3	-	33.6	48.3		

LEGEND:

- Do not operate
- Cfm - Cubic feet per minute (supply air)
- EAT(db) - Entering air temperature (dry bulb)
- EAT(wb) - Entering air temperature (wet bulb)
- SHC - Sensible heat capacity
- TC - Total capacity

Table 8 (cont.) - COOLING CAPACITIES

1-STAGE COOLING

50HC07 (6 TONS) – UNIT WITH HUMIDI-MIZER SYSTEM IN SUBCOOLING MODE										
Temp (F) Air Ent Condenser (Edb)		AIR ENTERING EVAPORATOR – CFM								
		1800			2400			3000		
		Air Entering Evaporator – Ewb (F)								
		72	67	62	72	67	62	72	67	62
75	TC	85.7	77.4	70.0	91.1	82.6	74.9	94.5	85.7	78.4
	SHC	38.2	47.1	56.1	43.9	55.6	67.1	49.0	63.1	76.4
	kW	4.05	4.01	3.97	4.00	4.04	4.08	4.09	4.05	4.02
85	TC	80.9	73.1	66.0	85.9	77.9	70.6	89.2	80.9	73.9
	SHC	33.5	42.9	52.3	38.8	51.1	63.0	43.9	58.6	72.1
	kW	4.46	4.43	4.39	4.42	4.45	4.48	4.51	4.47	4.43
95	TC	75.7	68.4	61.7	80.6	72.9	66.0	83.6	75.7	69.1
	SHC	28.7	38.5	48.3	33.8	46.4	58.7	38.6	53.7	67.6
	kW	4.92	4.89	4.86	4.88	4.91	4.95	4.96	4.92	4.90
105	TC	70.2	63.3	57.0	74.7	67.5	61.1	77.5	70.1	64.0
	SHC	23.6	33.9	44.1	28.4	41.4	54.2	32.9	48.6	62.7
	kW	5.43	5.40	5.37	5.39	5.42	5.45	5.47	5.43	5.41
115	TC	64.3	57.8	52.0	68.4	61.7	55.7	71.0	64.1	58.3
	SHC	18.2	28.9	39.6	22.7	36.2	49.4	27.0	43.1	58.2
	kW	5.99	5.96	5.93	5.95	5.98	6.01	6.02	5.99	5.97
125	TC	57.9	52.0	46.6	61.6	55.4	49.9	64.0	57.5	52.4
	SHC	12.4	23.8	34.9	16.6	30.7	44.3	20.7	37.3	52.4
	kW	6.59	6.57	6.55	6.56	6.59	6.61	6.62	6.60	6.58

50HC07 (6 TONS) – UNIT WITH HUMIDI-MIZER SYSTEM IN HOT GAS REHEAT MODE										
Temp (F) Air Ent Condenser (Edb)		AIR ENTERING EVAPORATOR – Ewb (F)								
		75 Dry Bulb			75 Dry Bulb			75 Dry Bulb		
		62.5 Wet Bulb			64 Wet Bulb			65.3 Wet Bulb		
		(50% Relative)			(56% Relative)			(60% Relative)		
		Air Entering Evaporator – Cfm								
1800	2400	3000	1800	2400	3000	1800	2400	3000		
80	TC	24.17	25.88	26.92	25.35	27.08	28.15	26.39	28.18	29.25
	SHC	-1.44	2.99	7.86	-5.08	-1.55	2.50	-8.25	-5.47	-2.14
	kW	4.15	4.16	4.17	4.17	4.18	4.18	4.18	4.19	4.20
75	TC	26.03	27.87	28.95	27.27	29.11	30.21	28.36	30.24	31.35
	SHC	0.43	4.97	9.86	-3.12	0.49	4.56	-6.19	-3.36	-0.03
	kW	3.96	3.97	3.98	3.98	3.99	4.00	4.00	4.01	4.01
70	TC	26.50	28.76	30.07	27.92	29.99	31.34	29.45	31.67	33.23
	SHC	0.87	5.84	10.97	-2.49	1.35	5.68	-5.06	-1.85	1.94
	kW	3.97	3.93	3.91	3.96	3.95	3.93	3.92	3.89	3.87
60	TC	27.59	29.22	30.17	28.70	30.33	31.30	31.50	31.32	32.91
	SHC	1.91	6.25	11.02	-1.79	1.63	5.57	-3.31	-2.39	1.45
	kW	3.95	3.99	4.01	3.99	4.02	4.04	4.09	4.05	4.01
50	TC	27.77	29.18	30.03	28.75	30.18	32.02	29.63	32.07	32.96
	SHC	2.03	6.18	10.85	-1.80	1.43	6.25	-5.14	-1.69	1.45
	kW	4.03	4.08	4.11	4.07	4.12	4.05	4.12	4.06	4.09
40	TC	29.02	30.38	31.46	29.96	31.32	32.09	30.79	33.49	34.34
	SHC	3.26	7.34	10.07	-0.63	2.54	6.29	-4.01	-0.30	2.80
	kW	3.96	4.02	4.08	4.01	4.08	4.11	4.06	4.00	4.03

LEGEND

- Edb – Entering Dry–Bulb
- Ewb – Entering Wet–Bulb
- kW – Compressor Motor Power Input
- ldb – Leaving Dry–Bulb
- lwb – Leaving Wet–Bulb
- SHC – Sensible Heat Capacity (1000 Btuh) Gross
- TC – Total Capacity (1000 Btuh) Gross

NOTES:

1. Direct interpolation is permissible. Do not extrapolate.
2. The following formulas may be used:

$$t_{ldb} = t_{edb} - \frac{\text{sensible capacity (Btuh)}}{1.10 \times \text{cfm}}$$

t_{lwb} = Wet–bulb temperature corresponding to enthalpy of air leaving evaporator coil (h_{lwb})

$$h_{lwb} = h_{ewb} - \frac{\text{total capacity (Btuh)}}{4.5 \times \text{cfm}}$$

Where: h_{ewb} = Enthalpy of air entering evaporator coil

Table 8 (cont.) - COOLING CAPACITIES

2-STAGE COOLING

50HC*D08			AMBIENT TEMPERATURE																
			85			95			105			115			125				
			EA (dB)			EA (dB)			EA (dB)			EA (dB)			EA (dB)				
			75	80	85	75	80	85	75	80	85	75	80	85	75	80	85		
2250 Cfm	EA (wb)	58	TC	81	80	91.8	77.9	77.9	88.4	74.7	74.7	84.6	71.1	71.1	80.6	67.3	67.3	76.3	
			SHC	70.2	81	91.8	67.5	77.9	88.4	64.7	74.7	84.6	61.6	71.1	80.6	58.3	67.3	76.3	
		62	TC	85.1	85.1	87.2	81.1	81.1	85.3	76.9	76.9	83.2	72.5	72.5	81	67.8	67.8	78.5	
			SHC	63.3	75.3	87.2	61.4	73.4	85.3	59.5	71.3	83.2	57.3	69.2	81	55	66.7	78.5	
		67	TC	93.3	93.3	93.3	89	89	89	84.3	84.3	84.3	79.4	79.4	79.4	74.1	74.1	74.1	
			SHC	52.3	64.2	76.2	50.4	62.4	74.4	48.4	60.4	72.4	46.4	58.3	70.3	44.2	56.2	68.1	
	72	TC	102.3	102.3	102.3	97.5	97.5	97.5	92.5	92.5	92.5	87.1	87.1	87.1	81.3	81.3	81.3		
		SHC	40.9	53	65	39	51.1	63.1	37.1	49.2	61.2	35.1	47.1	59.1	32.9	44.9	57		
	76	TC	-	110	110	-	104.8	104.8	-	99.4	99.4	-	93.5	93.5	-	87.3	87.3		
		SHC	-	43.7	56.1	-	41.9	54.2	-	39.9	52.2	-	37.9	50.2	-	35.8	48		
	2625 Cfm	EA (wb)	58	TC	85.4	85.4	96.9	82.1	82.1	93.1	78.6	78.6	89.1	74.7	74.7	84.7	70.5	70.5	80
				SHC	74	85.4	96.9	71.2	82.1	93.1	68.1	78.6	89.1	64.7	74.7	84.7	61.1	70.5	80
62			TC	87.8	87.8	95.7	83.7	83.7	93.6	79.3	79.3	91.3	75	75	87.8	70.6	70.6	83.2	
			SHC	68.2	82	95.7	66.2	79.9	93.6	64.1	77.7	91.3	61.3	74.6	87.8	58	70.6	83.2	
67			TC	96	96	96	91.4	91.4	91.4	86.5	86.5	86.5	81.3	81.3	81.3	75.8	75.8	75.8	
			SHC	55.4	69.3	83.2	53.5	67.4	81.2	51.5	65.4	79.2	49.4	63.2	77.1	47.2	61	74.8	
72		TC	105.2	105.2	105.2	100.1	100.1	100.1	94.8	94.8	94.8	89.1	89.1	89.1	83	83	83		
		SHC	42.3	56.2	70.2	40.4	54.3	68.2	38.4	52.3	66.2	36.3	50.2	64.1	34.1	48	61.9		
76		TC	-	112.9	112.9	-	107.5	107.5	-	101.7	101.7	-	95.6	95.6	-	89.1	89.1		
		SHC	-	45.5	59.8	-	43.6	57.8	-	41.7	55.8	-	39.6	53.7	-	37.4	51.5		
3000 Cfm		EA (wb)	58	TC	89.2	89.2	101.1	85.6	85.6	97.1	81.8	81.8	92.8	77.7	77.7	88.1	73.2	73.2	83
				SHC	77.3	89.2	101.1	74.2	85.6	97.1	70.9	81.8	92.8	67.3	77.7	88.1	63.5	73.2	83
	62		TC	90.1	90.1	103.5	86.1	86.1	100.3	81.9	81.9	96.5	77.8	77.8	91.6	73.3	73.3	86.4	
			SHC	72.7	88.1	103.5	70.1	85.2	100.3	67.3	81.9	96.5	63.9	77.8	91.6	60.2	73.3	86.4	
	67		TC	98.1	98.1	98.1	93.3	93.3	93.3	88.2	88.2	88.2	82.8	82.8	83.6	77	77	81.3	
			SHC	58.4	74.1	89.9	56.5	72.2	87.9	54.4	70.1	85.8	52.3	67.9	83.6	50	65.6	81.3	
	72	TC	107.3	107.3	107.3	102.1	102.1	102.1	96.5	96.5	96.5	90.6	90.6	90.6	84.3	84.3	84.3		
		SHC	43.5	59.3	75.1	41.6	57.3	73.1	39.5	55.3	71.1	37.4	53.2	69	35.2	50.9	66.7		
	76	TC	-	115.2	115.2	-	109.5	109.5	-	103.5	103.5	-	97.2	97.2	-	90.4	90.4		
		SHC	-	47.2	63.2	-	45.3	61.3	-	43.3	59.3	-	41.2	57.1	-	38.9	54.8		
	3375 Cfm	EA (wb)	58	TC	92.4	92.4	104.7	88.6	88.6	100.4	84.6	84.6	95.9	80.2	80.2	90.9	75.5	75.5	85.6
				SHC	80	92.4	104.7	76.8	88.6	100.4	73.3	84.6	95.9	69.5	80.2	90.9	65.4	75.5	85.6
62			TC	92.5	92.5	109	88.7	88.7	104.5	84.6	84.6	99.7	80.3	80.3	94.6	75.6	75.6	89	
			SHC	76	92.5	109	72.9	88.7	104.5	69.6	84.6	99.7	66	80.3	94.6	62.1	75.6	89	
67			TC	99.7	99.7	99.7	94.8	94.8	94.8	89.5	89.5	92.2	84	84	89.9	78	78	87.4	
			SHC	61.3	78.8	96.4	59.3	76.8	94.3	57.2	74.7	92.2	55	72.4	89.9	52.6	70	87.4	
72		TC	109	109	109	103.6	103.6	103.6	97.8	97.8	97.8	91.8	91.8	91.8	85.3	85.3	85.3		
		SHC	44.6	62.2	79.9	42.7	60.3	77.9	40.6	58.2	75.8	38.5	56.1	73.6	36.2	53.8	71.3		
76		TC	-	116.9	116.9	-	111.1	111.1	-	104.9	104.9	-	98.4	98.4	-	91.5	91.5		
		SHC	-	48.8	66.6	-	46.8	64.6	-	44.8	62.6	-	42.7	60.4	-	40.4	58.1		
3750 Cfm		EA (wb)	58	TC	95.1	95.1	107.8	91.2	91.2	103.3	86.9	86.9	98.5	82.3	82.3	93.3	77.4	77.4	87.8
				SHC	82.4	95.1	107.8	79	91.2	103.3	75.3	86.9	98.5	71.3	82.3	93.3	67.1	77.4	87.8
	62		TC	95.2	95.2	112.2	91.2	91.2	107.5	87	87	102.5	82.4	82.4	97.1	77.5	77.5	91.3	
			SHC	78.2	95.2	112.2	75	91.2	107.5	71.5	87	102.5	67.7	82.4	97.1	63.7	77.5	91.3	
	67		TC	101.1	101.1	102.6	96	96	100.5	90.6	90.6	98.3	84.9	84.9	95.9	78.9	78.9	93.2	
			SHC	64	83.3	102.6	62	81.2	100.5	59.8	79.1	98.3	57.6	76.7	95.9	55.1	74.2	93.2	
	72	TC	110.4	110.4	110.4	104.8	104.8	104.8	98.9	98.9	98.9	92.7	92.7	92.7	86.1	86.1	86.1		
		SHC	45.7	65.1	84.5	43.7	63.1	82.5	41.7	61	80.4	39.5	58.8	78.2	37.2	56.5	75.9		
	76	TC	-	118.3	118.3	-	112.4	112.4	-	106	106	-	99.4	99.4	-	92.3	92.3		
		SHC	-	50.3	69.9	-	48.3	67.9	-	46.2	65.8	-	44.1	63.6	-	41.8	61.3		

* See Minimum–Maximum Airflow Ratings in Table 4. Do not operate outside these limits.

LEGEND:

- Do not operate
- Cfm - Cubic feet per minute (supply air)
- EAT(db) - Entering air temperature (dry bulb)
- EAT(wb) - Entering air temperature (wet bulb)
- SHC - Sensible heat capacity
- TC - Total capacity

Table 8 (cont.) - COOLING CAPACITIES

2-STAGE COOLING

50HC08 (7.5 TONS) – UNIT WITH HUMIDI-MIZER SYSTEM IS SUBCOOLING MODE										
Temp (F) Air Ent Condenser (Edb)		AIR ENTERING EVAPORATOR – CFM								
		2250			3000			3750		
		Air Entering Evaporator – Ewb (F)								
		72	67	62	72	67	62	72	67	62
75	TC	101.9	92.9	84.0	109.6	96.3	89.9	113.6	103.0	94.5
	SHC	43.9	54.6	66.7	50.2	62.7	80.9	56.8	75.8	93.0
	kW	4.60	4.54	4.48	4.65	4.50	4.52	4.68	4.60	4.55
85	TC	96.6	87.3	78.9	102.8	92.9	84.5	106.5	96.7	88.7
	SHC	36.8	49.3	61.9	43.8	59.7	75.9	50.2	69.8	87.4
	kW	5.15	5.09	5.04	5.20	5.13	5.08	5.22	5.16	5.11
95	TC	90.2	81.4	73.5	95.7	86.8	78.8	99.4	90.1	82.7
	SHC	30.8	43.9	56.9	37.2	54.1	70.5	43.6	63.8	81.6
	kW	5.78	5.72	5.67	5.82	5.76	5.71	5.85	5.79	5.74
105	TC	83.5	75.2	67.8	88.8	80.2	72.7	92.0	83.2	76.4
	SHC	24.6	38.2	51.7	30.8	48.0	64.9	36.7	57.4	75.5
	kW	6.50	6.45	6.40	6.54	6.48	6.43	6.57	6.50	6.46
115	TC	76.3	68.7	61.8	81.1	73.2	66.3	84.1	76.0	69.7
	SHC	17.9	32.1	46.2	23.7	41.5	59.0	29.4	50.7	69.0
	kW	7.32	7.28	7.24	7.35	7.31	7.27	7.38	7.32	7.29
125	TC	68.6	61.6	55.4	73.0	65.7	59.3	75.8	68.2	62.6
	SHC	10.9	25.6	40.3	16.2	34.7	52.6	21.7	43.6	62.1
	kW	8.24	8.22	8.20	8.27	8.23	8.21	8.29	8.25	8.22

50HC08 (7.5 TONS) – UNIT WITH HUMIDI-MIZER SYSTEM IN HOT GAS REHEAT MODE										
Temp (F) Air Ent Condenser (Edb)		AIR ENTERING EVAPORATOR – Ewb (F)								
		75 Dry Bulb			75 Dry Bulb			75 Dry Bulb		
		62.5 Wet Bulb			64 Wet Bulb			65.3 Wet Bulb		
		(50% Relative)			(56% Relative)			(60% Relative)		
		Air Entering Evaporator – Cfm								
2250	3000	3750	2250	3000	3750	2250	3000	3750		
80	TC	24.06	26.14	27.48	25.50	27.56	28.78	26.59	28.71	29.96
	SHC	-5.55	1.16	8.38	-10.20	-4.69	1.40	-14.39	-9.85	-4.68
	kW	4.43	4.42	4.41	4.40	4.41	4.42	4.42	4.43	4.44
75	TC	24.87	27.26	28.47	26.06	28.53	30.02	27.67	29.77	31.02
	SHC	-4.77	2.23	9.32	-9.65	-3.76	2.59	-13.35	-8.83	-3.66
	kW	4.42	4.36	4.38	4.45	4.38	4.36	4.36	4.39	4.40
70	TC	25.16	27.88	28.56	26.72	29.10	30.26	28.17	30.20	31.83
	SHC	-4.48	2.84	9.45	-9.02	-3.19	2.85	-12.88	-8.40	-2.87
	kW	4.49	4.38	4.48	4.44	4.41	4.44	4.40	4.44	4.40
60	TC	26.43	28.14	29.14	27.49	29.24	30.27	28.50	30.24	32.33
	SHC	-3.25	3.14	10.05	-8.26	-2.99	2.94	-12.54	-8.29	-2.32
	kW	4.48	4.55	4.59	4.53	4.60	4.65	4.58	4.65	4.54
50	TC	27.19	29.55	31.26	28.94	30.59	32.36	30.54	31.54	32.52
	SHC	-2.50	4.50	12.05	-6.87	-1.69	4.92	-10.60	-7.02	-2.07
	kW	4.53	4.51	4.46	4.48	4.57	4.52	4.43	4.63	4.70
40	TC	27.92	31.58	32.82	28.81	32.60	33.54	31.82	33.50	34.44
	SHC	-1.79	6.42	10.84	-6.94	0.23	6.05	-9.36	-5.15	-0.25
	kW	4.57	4.37	4.46	4.65	4.45	4.51	4.40	4.51	4.58

LEGEND

- Edb – Entering Dry-Bulb
- Ewb – Entering Wet-Bulb
- kW – Compressor Motor Power Input
- ldb – Leaving Dry-Bulb
- lwb – Leaving Wet-Bulb
- SHC – Sensible Heat Capacity (1000 Btuh) Gross
- TC – Total Capacity (1000 Btuh) Gross

NOTES:

1. Direct interpolation is permissible. Do not extrapolate.
2. The following formulas may be used:

$$t_{ldb} = t_{edb} - \frac{\text{sensible capacity (Btuh)}}{1.10 \times \text{cfm}}$$

t_{lwb} = Wet-bulb temperature corresponding to enthalpy of air leaving evaporator coil (h_{lwb})

$$h_{lwb} = h_{ewb} - \frac{\text{total capacity (Btuh)}}{4.5 \times \text{cfm}}$$

Where: h_{ewb} = Enthalpy of air entering evaporator coil

Table 8 (cont.) - COOLING CAPACITIES

2-STAGE COOLING

50HC*D09				AMBIENT TEMPERATURE															
				85			95			105			115			125			
				EA (dB)			EA (dB)			EA (dB)			EA (dB)			EA (dB)			
				75	80	85	75	80	85	75	80	85	75	80	85	75	80	85	
2550 Cfm	EA (wb)	58	TC	90.5	90.5	102.4	87	87	98.5	83.2	83.2	94.2	79.1	79.1	89.6	74.7	74.7	84.6	
			SHC	78.6	90.5	102.4	75.5	87	98.5	72.2	83.2	94.2	68.7	79.1	89.6	64.8	74.7	84.6	
		62	TC	94.8	94.8	98.1	90.2	90.2	95.8	85.4	85.4	93.4	80.3	80.3	90.8	74.9	74.9	87.8	
			SHC	71.2	84.6	98.1	69.1	82.4	95.8	66.8	80.1	93.4	64.3	77.5	90.8	61.6	74.7	87.8	
		67	TC	104	104	104	99	99	99	93.7	93.7	93.7	88	88	88	81.9	81.9	81.9	
			SHC	58.7	72.2	85.7	56.6	70	83.5	54.3	67.8	81.3	52	65.4	78.9	49.5	62.9	76.4	
	72	TC	114	114	114	108.5	108.5	108.5	102.7	102.7	102.7	96.5	96.5	96.5	89.8	89.8	89.8		
		SHC	45.8	59.3	72.9	43.7	57.2	70.8	41.4	55	68.5	39.1	52.7	66.2	36.7	50.2	63.7		
	76	TC	-	122.4	122.4	-	116.5	116.5	-	110.3	110.3	-	103.7	103.7	-	96.5	96.5		
		SHC	-	48.8	62.8	-	46.7	60.6	-	44.5	58.4	-	42.2	56	-	39.8	53.5		
	2975 Cfm	EA (wb)	58	TC	95.4	95.4	108	91.6	91.6	103.7	87.5	87.5	99	83.1	83.1	94	78.3	78.3	88.6
				SHC	82.8	95.4	108	79.5	91.6	103.7	75.9	87.5	99	72.1	83.1	94	68	78.3	88.6
62			TC	97.7	97.7	107.4	93	93	104.9	88.1	88.1	102.1	83.2	83.2	97.9	78.4	78.4	92.2	
			SHC	76.7	92	107.4	74.3	89.6	104.9	71.8	86.9	102.1	68.6	83.2	97.9	64.6	78.4	92.2	
67			TC	106.9	106.9	106.9	101.6	101.6	101.6	96	96	96	90.1	90.1	90.1	83.7	83.7	83.9	
			SHC	62.3	77.8	93.4	60.1	75.6	91.2	57.8	73.3	88.9	55.4	70.9	86.5	52.8	68.3	83.9	
72		TC	117	117	117	111.2	111.2	111.2	105.1	105.1	105.1	98.6	98.6	98.6	91.7	91.7	91.7		
		SHC	47.3	62.9	78.6	45.1	60.8	76.4	42.9	58.5	74.1	40.5	56.1	71.7	38	53.6	69.2		
76		TC	-	125.6	125.6	-	119.4	119.4	-	112.8	112.8	-	105.9	105.9	-	98.4	98.4		
		SHC	-	50.8	66.8	-	48.7	64.6	-	46.4	62.3	-	44.1	59.9	-	41.6	57.4		
3400 Cfm		EA (wb)	58	TC	99.5	99.5	112.7	95.4	95.4	108	91	91	103	86.3	86.3	97.7	81.2	81.2	91.9
				SHC	86.4	99.5	112.7	82.8	95.4	108	79	91	103	74.9	86.3	97.7	70.5	81.2	91.9
	62		TC	100.3	100.3	115.8	95.6	95.6	112.4	91.2	91.2	107.2	86.4	86.4	101.6	81.3	81.3	95.6	
			SHC	81.5	98.6	115.8	78.7	95.6	112.4	75.1	91.2	107.2	71.2	86.4	101.6	67	81.3	95.6	
	67		TC	109.1	109.1	109.1	103.6	103.6	103.6	97.8	97.8	97.8	91.6	91.6	93.7	85	85	90.9	
			SHC	65.6	83.2	100.8	63.4	81	98.6	61	78.6	96.2	58.6	76.1	93.7	55.9	73.4	90.9	
	72	TC	119.3	119.3	119.3	113.3	113.3	113.3	107	107	107	100.3	100.3	100.3	93	93	93		
		SHC	48.7	66.4	84.1	46.5	64.2	81.8	44.2	61.8	79.5	41.8	59.4	77.1	39.2	56.9	74.5		
	76	TC	-	128	128	-	121.5	121.5	-	114.7	114.7	-	107.5	107.5	-	99.8	99.8		
		SHC	-	52.6	70.6	-	50.5	68.4	-	48.2	66.1	-	45.8	63.6	-	43.3	61.1		
	3825 Cfm	EA (wb)	58	TC	103	103	116.6	98.7	98.7	111.7	94	94	106.4	89	89	100.8	83.6	83.6	94.7
				SHC	89.4	103	116.6	85.6	98.7	111.7	81.6	94	106.4	77.3	89	100.8	72.6	83.6	94.7
62			TC	103.1	103.1	121.3	98.8	98.8	116.1	94.1	94.1	110.7	89.1	89.1	104.8	83.7	83.7	98.4	
			SHC	85	103.1	121.3	81.4	98.8	116.1	77.5	94.1	110.7	73.4	89.1	104.8	69	83.7	98.4	
67			TC	110.9	110.9	110.9	105.2	105.2	105.7	99.2	99.2	103.2	92.9	92.9	100.5	86.1	86.1	97.6	
			SHC	68.8	88.4	108	66.5	86.1	105.7	64.1	83.7	103.2	61.6	81.1	100.5	58.9	78.3	97.6	
72		TC	121.2	121.2	121.2	114.9	114.9	114.9	108.4	108.4	108.4	101.5	101.5	101.5	94.1	94.1	94.1		
		SHC	50	69.7	89.4	47.7	67.4	87.1	45.4	65.1	84.7	43	62.6	82.3	40.4	60	79.6		
76		TC	-	129.8	129.8	-	123.2	123.2	-	116.2	116.2	-	108.8	108.8	-	100.9	100.9		
		SHC	-	54.4	74.3	-	52.2	72.1	-	49.9	69.7	-	47.5	67.3	-	44.9	64.7		
4250 Cfm		EA (wb)	58	TC	106	106	119.9	101.4	101.4	114.8	96.6	96.6	109.3	91.3	91.3	103.4	85.7	85.7	97
				SHC	92	106	119.9	88	101.4	114.8	83.8	96.6	109.3	79.3	91.3	103.4	74.4	85.7	97
	62		TC	106.1	106.1	124.7	101.5	101.5	119.4	96.6	96.6	113.6	91.4	91.4	107.5	85.7	85.7	100.8	
			SHC	87.4	106.1	124.7	83.6	101.5	119.4	79.6	96.6	113.6	75.3	91.4	107.5	70.6	85.7	100.8	
	67		TC	112.3	112.3	114.9	106.5	106.5	112.5	100.4	100.4	109.9	93.9	93.9	107	87.1	87.1	103.8	
			SHC	71.8	93.4	114.9	69.5	91	112.5	67	88.5	109.9	64.4	85.7	107	61.6	82.7	103.8	
	72	TC	122.6	122.6	122.6	116.2	116.2	116.2	109.5	109.5	109.5	102.5	102.5	102.5	94.9	94.9	94.9		
		SHC	51.2	72.8	94.5	48.9	70.5	92.2	46.6	68.2	89.8	44.1	65.7	87.3	41.5	63.1	84.6		
	76	TC	-	131.3	131.3	-	124.5	124.5	-	117.4	117.4	-	109.8	109.8	-	101.8	101.8		
		SHC	-	56	77.9	-	53.8	75.6	-	51.5	73.3	-	49.1	70.8	-	46.5	68.1		

* See Minimum–Maximum Airflow Ratings in Table 4. Do not operate outside these limits.

LEGEND:

- Do not operate
- Cfm - Cubic feet per minute (supply air)
- EAT(db) - Entering air temperature (dry bulb)
- EAT(wb) - Entering air temperature (wet bulb)
- SHC - Sensible heat capacity
- TC - Total capacity

Table 8 (cont.) - COOLING CAPACITIES

2-STAGE COOLING

50HC09 (8.5 TONS) – UNIT WITH HUMIDI-MIZER SYSTEM IN SUBCOOLING MODE										
Temp (F) Air Ent Condenser (Edb)		AIR ENTERING EVAPORATOR – CFM								
		2550			3400			4250		
		Air Entering Evaporator – Ewb (F)								
		72	67	62	72	67	62	72	67	62
75	TC	114.7	103.9	93.9	104.3	110.6	100.5	122.9	114.6	105.5
	SHC	48.7	62.2	75.7	84.7	74.2	91.4	60.6	85.1	103.9
	kW	5.17	5.09	5.01	5.10	5.14	5.07	5.20	5.18	5.11
85	TC	107.8	97.4	88.0	114.2	102.9	94.2	116.2	107.6	98.7
	SHC	42.3	56.3	70.3	49.7	67.0	85.6	61.1	78.7	97.3
	kW	5.79	5.71	5.63	5.85	5.75	5.69	5.88	5.80	5.72
95	TC	100.5	90.8	82.0	106.6	96.2	87.7	110.2	100.1	92.2
	SHC	35.6	50.2	64.8	42.8	61.0	79.6	49.2	71.9	91.0
	kW	6.50	6.42	6.34	6.56	6.46	6.40	6.59	6.50	6.44
105	TC	92.7	83.8	75.7	98.5	89.0	80.9	102.1	92.4	85.1
	SHC	28.5	43.9	59.1	35.4	54.6	73.4	41.9	64.9	84.2
	kW	7.30	7.23	7.16	7.36	7.28	7.21	7.40	7.31	7.25
115	TC	85.0	76.5	69.0	90.0	81.3	73.8	93.3	84.4	77.7
	SHC	21.5	37.4	53.1	27.7	47.6	66.9	34.0	57.7	77.0
	kW	8.23	8.16	8.10	8.27	8.20	8.14	8.31	8.23	8.18
125	TC	76.5	68.8	61.8	81.1	72.9	66.2	84.1	75.8	69.8
	SHC	13.8	30.4	46.7	19.7	40.0	60.1	25.6	50.0	69.8
	kW	9.25	9.20	9.16	9.28	9.22	9.19	9.31	9.25	9.21

50HC09 (8.5 TONS) – UNIT WITH HUMIDI-MIZER SYSTEM IN HOT GAS REHEAT MODE										
Temp (F) Air Ent Condenser (Edb)		AIR ENTERING EVAPORATOR – Ewb (F)								
		75 Dry Bulb			75 Dry Bulb			75 Dry Bulb		
		62.5 Wet Bulb			64 Wet Bulb			65.3 Wet Bulb		
		(50% Relative)			(56% Relative)			(60% Relative)		
		Air Entering Evaporator – Cfm								
2550	3400	4250	2550	3400	4250	2550	3400	4250		
80	TC	27.53	29.56	30.72	28.95	31.03	32.22	30.26	32.33	33.58
	SHC	-3.84	3.82	11.92	-9.25	-2.92	4.09	-13.93	-8.77	-2.82
	kW	5.09	5.11	5.13	5.11	5.14	5.15	5.14	5.15	5.17
75	TC	29.09	31.60	32.81	30.77	33.10	34.33	32.30	34.45	35.73
	SHC	-2.34	5.72	13.84	-7.51	-0.98	6.04	-11.95	-6.78	-0.82
	kW	4.97	4.91	4.93	4.95	4.94	4.95	4.94	4.96	4.97
70	TC	29.58	32.45	33.63	31.48	34.12	35.55	33.12	35.65	37.38
	SHC	-1.88	6.54	14.63	-6.83	0.00	7.20	-11.16	-5.63	0.75
	kW	4.99	4.90	4.92	4.96	4.90	4.89	4.93	4.90	4.86
60	TC	30.71	33.44	34.52	32.90	34.79	35.86	34.07	36.02	37.09
	SHC	-0.78	7.52	15.54	-5.47	0.68	7.57	-10.28	-5.24	0.55
	kW	5.03	4.95	5.00	4.94	5.01	5.05	4.99	5.06	5.09
50	TC	32.63	34.31	35.26	33.81	35.53	36.51	34.90	36.66	37.65
	SHC	1.05	8.38	16.29	-4.60	1.42	8.24	-9.49	-4.59	1.14
	kW	4.92	5.01	5.06	4.99	5.07	5.13	5.05	5.14	5.19
40	TC	31.94	33.26	35.77	32.96	35.70	37.86	35.17	38.01	38.92
	SHC	0.45	7.47	13.75	-5.35	1.63	9.52	-9.20	-3.29	2.36
	kW	5.16	5.27	5.20	5.25	5.19	5.10	5.16	5.11	5.17

LEGEND

- Edb – Entering Dry-Bulb
- Ewb – Entering Wet-Bulb
- kW – Compressor Motor Power Input
- ldb – Leaving Dry-Bulb
- lwb – Leaving Wet-Bulb
- SHC – Sensible Heat Capacity (1000 Btuh) Gross
- TC – Total Capacity (1000 Btuh) Gross

NOTES:

1. Direct interpolation is permissible. Do not extrapolate.
2. The following formulas may be used:

$$t_{ldb} = t_{edb} - \frac{\text{sensible capacity (Btuh)}}{1.10 \times \text{cfm}}$$

t_{lwb} = Wet-bulb temperature corresponding to enthalpy of air leaving evaporator coil (h_{lwb})

$$h_{lwb} = h_{ewb} - \frac{\text{total capacity (Btuh)}}{4.5 \times \text{cfm}}$$

Where: h_{ewb} = Enthalpy of air entering evaporator coil

Table 8 (cont.) - COOLING CAPACITIES

2-STAGE COOLING

50HC11 (10 TONS) – UNIT WITH HUMIDI-MIZER SYSTEM IN SUBCOOLING MODE										
Temp (F) Air Entering Condenser (Edb)		AIR ENTERING EVAPORATOR – CFM								
		3000			4000			5000		
		Air Entering Evaporator – Ewb (F)								
		72	67	62	72	67	62	72	67	62
75	TC	121.34	110.46	99.60	139.20	125.18	111.17	157.20	140.10	110.50
	SHC	58.86	72.03	85.20	67.31	80.25	93.18	74.00	86.80	72.00
	kW	6.61	6.54	6.45	6.65	6.58	6.50	6.67	6.62	6.53
85	TC	115.30	105.01	94.73	128.03	114.90	101.77	140.90	124.90	105.00
	SHC	45.81	62.19	78.57	55.02	71.16	87.29	62.30	78.30	62.20
	kW	6.76	6.88	6.78	6.80	6.73	6.83	6.82	6.77	6.87
95	TC	109.26	99.57	89.89	116.87	104.62	92.38	124.60	109.70	99.60
	SHC	32.76	52.35	71.93	42.70	62.07	81.40	50.60	69.80	52.30
	kW	7.55	7.49	7.39	7.58	7.51	7.45	7.60	7.56	7.49
105	TC	103.21	94.13	85.04	105.71	94.34	82.98	108.20	94.60	94.10
	SHC	19.71	42.51	65.30	30.45	52.98	75.51	39.00	61.30	42.50
	kW	8.47	8.42	8.32	8.51	8.44	8.37	8.53	8.49	8.41
115	TC	97.17	88.68	80.20	94.54	84.06	73.58	91.90	79.40	88.70
	SHC	6.67	32.66	58.66	18.16	43.89	69.62	27.30	52.80	32.60
	kW	9.42	9.37	9.27	9.46	9.39	9.32	9.48	9.44	9.36
125	TC	91.12	83.24	75.36	83.38	73.78	64.19	75.60	64.20	83.20
	SHC	-6.40	22.82	52.03	5.87	34.80	63.73	15.60	44.30	22.80
	kW	10.35	10.30	10.20	10.39	10.32	10.25	10.41	10.37	10.29

50HC11 (10 TONS) – UNIT WITH HUMIDI-MIZER SYSTEM IN HOT GAS REHEAT MODE										
Temp (F) Air Entering Condenser (Edb)		AIR ENTERING EVAPORATOR – Ewb (F)								
		75 Dry Bulb			75 Dry Bulb			75 Dry Bulb		
		62.5 Wet Bulb			64 Wet Bulb			65.3 Wet Bulb		
		(50% Relative)			(56% Relative)			(60% Relative)		
		Air Entering Evaporator – Cfm								
		3000	4000	5000	3000	4000	5000	3000	4000	5000
75	TC	46.00	49.70	52.50	50.20	52.60	55.00	51.40	55.60	57.90
	SHC	8.50	18.40	26.50	3.60	11.90	18.50	-1.10	5.20	11.70
	kW	6.56	6.50	6.42	6.55	6.48	6.40	6.53	6.49	6.40
85	TC	47.80	51.30	54.10	51.70	54.20	56.80	53.30	57.50	59.70
	SHC	10.20	20.00	28.20	5.30	13.40	20.10	0.50	6.80	13.20
	kW	6.51	6.45	6.36	6.50	6.44	6.35	6.47	6.44	6.35
95	TC	50.00	53.60	56.20	54.00	56.30	58.80	55.30	59.60	61.80
	SHC	12.00	21.60	29.80	6.90	15.00	21.70	2.20	8.50	14.70
	kW	6.45	6.40	6.29	6.45	6.39	6.28	6.42	6.39	6.28
105	TC	54.00	57.50	60.10	57.90	60.20	62.70	59.30	63.50	65.70
	SHC	15.20	24.70	31.90	10.20	18.30	24.90	5.40	11.80	18.00
	kW	6.33	6.28	6.19	6.33	6.27	6.17	6.30	6.27	6.17
115	TC	58.00	61.40	64.20	61.80	64.40	66.50	63.30	67.20	69.50
	SHC	18.50	28.00	36.20	13.50	21.50	28.20	8.70	15.10	21.30
	kW	6.22	6.17	6.10	6.22	6.16	6.08	6.19	6.16	6.08
125	TC	61.90	65.30	68.00	65.70	68.10	70.50	67.20	71.30	73.50
	SHC	21.70	31.10	39.30	16.70	24.90	31.20	12.00	18.30	24.60
	kW	6.10	6.05	5.98	6.10	6.04	5.96	6.07	6.04	5.96

LEGEND

- Edb – Entering Dry-Bulb
- Ewb – Entering Wet-Bulb
- kW – Compressor Motor Power Input
- ldb – Leaving Dry-Bulb
- lwb – Leaving Wet-Bulb
- SHC – Sensible Heat Capacity (1000 Btuh) Gross
- TC – Total Capacity (1000 Btuh) Gross

NOTES:

1. Direct interpolation is permissible. Do not extrapolate.
2. The following formulas may be used:

$$t_{ldb} = t_{edb} - \frac{\text{sensible capacity (Btuh)}}{1.10 \times \text{cfm}}$$

$$t_{lwb} = \text{Wet-bulb temperature corresponding to enthalpy of air leaving evaporator coil } (h_{lwb})$$

$$h_{lwb} = h_{ewb} - \frac{\text{total capacity (Btuh)}}{4.5 \times \text{cfm}}$$

Where: h_{ewb} = Enthalpy of air entering evaporator coil

Table 8 (cont.) - COOLING CAPACITIES

2-STAGE COOLING

50HC*D12				AMBIENT TEMPERATURE															
				85			95			105			115			125			
				EA (dB)			EA (dB)			EA (dB)			EA (dB)			EA (dB)			
				75	80	85	75	80	85	75	80	85	75	80	85	75	80	85	
3000 Cfm	EA (wb)	58	TC	104.3	104.3	118.5	99.5	99.5	113	93.4	93.4	106.1	86.7	86.7	98.6	79.7	79.7	90.6	
			SHC	90.2	104.3	118.5	86	99.5	113	80.6	93.4	106.1	74.9	86.7	98.6	68.8	79.7	90.6	
		62	TC	109.7	109.7	112.4	103.6	103.6	109.5	95.9	95.9	105.9	87.6	87.6	101.2	79.8	79.8	94.4	
			SHC	80.8	96.6	112.4	78	93.8	109.5	74.5	90.2	105.9	70.3	85.7	101.2	65.2	79.8	94.4	
		67	TC	121.5	121.5	121.5	115.4	115.4	115.4	107.8	107.8	107.8	98.7	98.7	98.7	89.1	89.1	89.1	
			SHC	65.2	81	96.9	62.7	78.6	94.5	59.7	75.6	91.5	56.2	72	87.9	52.5	68.3	84.2	
	72	TC	133	133	133	127.1	127.1	127.1	120.5	120.5	120.5	112	112	112	102.1	102.1	102.1		
		SHC	48.7	64.5	80.4	46.5	62.4	78.3	44.1	60	75.9	41.2	57.1	73	37.8	53.7	69.6		
	76	TC	-	140.9	140.9	-	135.1	135.1	-	128.4	128.4	-	121.3	121.3	-	112.5	112.5		
		SHC	-	50.6	67.1	-	48.7	65.2	-	46.6	63.1	-	44.3	60.7	-	41.4	57.7		
	3500 Cfm	EA (wb)	58	TC	109.9	109.9	124.9	104.9	104.9	119.3	98.7	98.7	112.2	91.6	91.6	104.2	84.2	84.2	95.8
				SHC	94.9	109.9	124.9	90.6	104.9	119.3	85.2	98.7	112.2	79	91.6	104.2	72.6	84.2	95.8
62			TC	112.8	112.8	123.1	106.7	106.7	120	99.5	99.5	115.3	91.7	91.7	108.5	84.3	84.3	99.8	
			SHC	86.8	104.9	123.1	83.9	102	120	80	97.6	115.3	74.9	91.7	108.5	68.8	84.3	99.8	
67			TC	124.2	124.2	124.2	118	118	118	110.3	110.3	110.3	101	101	101	91	91	92.5	
			SHC	68.4	86.7	104.9	66.1	84.3	102.6	63.2	81.5	99.8	59.6	78	96.3	55.9	74.2	92.5	
72		TC	135.2	135.2	135.2	129.1	129.1	129.1	122.4	122.4	122.4	114.2	114.2	114.2	104.2	104.2	104.2		
		SHC	49.2	67.3	85.4	47.1	65.3	83.4	44.8	63	81.2	42	60.4	78.7	38.7	57.1	75.5		
76		TC	-	142.4	142.4	-	136.5	136.5	-	129.6	129.6	-	122.4	122.4	-	114	114		
		SHC	-	51.7	70.9	-	49.7	68.7	-	47.5	66.3	-	45.2	63.8	-	42.6	61.2		
4000 Cfm		EA (wb)	58	TC	114.3	114.3	130	109.2	109.2	124.2	102.9	102.9	117	95.4	95.4	108.7	87.7	87.7	99.9
				SHC	98.6	114.3	130	94.2	109.2	124.2	88.7	102.9	117	82.2	95.4	108.7	75.5	87.7	99.9
	62		TC	115.3	115.3	132.4	109.6	109.6	128.3	102.9	102.9	121.9	95.5	95.5	113.2	87.8	87.8	104.1	
			SHC	91.9	112.2	132.4	88.7	108.5	128.3	84	102.9	121.9	77.9	95.5	113.2	71.5	87.8	104.1	
	67		TC	125.8	125.8	125.8	119.5	119.5	119.5	111.9	111.9	111.9	102.4	102.4	104.2	92.2	92.2	100.4	
			SHC	71.3	91.8	112.3	69	89.6	110.2	66.2	86.9	107.6	62.8	83.5	104.2	59.1	79.7	100.4	
	72	TC	136.3	136.3	136.3	130.2	130.2	130.2	123.4	123.4	123.4	115.4	115.4	115.4	105.3	105.3	105.3		
		SHC	49.5	69.7	89.8	47.4	67.7	87.9	45.1	65.5	85.9	42.5	63.1	83.7	39.3	60.1	80.9		
	76	TC	-	143.1	143.1	-	137.1	137.1	-	130.1	130.1	-	122.6	122.6	-	114.5	114.5		
		SHC	-	52.2	73.2	-	50.2	71.1	-	48	68.7	-	45.7	66.4	-	43.3	64.1		
	4500 Cfm	EA (wb)	58	TC	117.5	117.5	133.8	112.4	112.4	127.9	106	106	120.7	98.4	98.4	112.1	90.3	90.3	103
				SHC	101.3	117.5	133.8	96.8	112.4	127.9	91.2	106	120.7	84.6	98.4	112.1	77.7	90.3	103
62			TC	117.6	117.6	139.4	112.5	112.5	133.3	106.1	106.1	125.8	98.5	98.5	116.8	90.4	90.4	107.4	
			SHC	95.9	117.6	139.4	91.6	112.5	133.3	86.4	106.1	125.8	80.1	98.5	116.8	73.5	90.4	107.4	
67			TC	126.6	126.6	126.6	120.2	120.2	120.2	112.8	112.8	114.8	103.2	103.2	111.6	93	93	107.6	
			SHC	73.7	96.4	119.2	71.5	94.3	117.2	68.9	91.8	114.8	65.6	88.6	111.6	61.8	84.7	107.6	
72		TC	136.7	136.7	136.7	130.5	130.5	130.5	123.6	123.6	123.6	115.7	115.7	115.7	105.7	105.7	105.7		
		SHC	49.4	71.6	93.7	47.4	69.7	91.9	45.1	67.5	89.9	42.7	65.4	88.2	39.5	62.6	85.8		
76		TC	-	143.1	143.1	-	137	137	-	129.9	129.9	-	122.4	122.4	-	114.3	114.3		
		SHC	-	52.4	75.1	-	50.5	73.1	-	48.2	70.8	-	46	68.5	-	43.7	66.5		
5000 Cfm		EA (wb)	58	TC	119.9	119.9	136.7	114.7	114.7	130.7	108.4	108.4	123.6	100.6	100.6	114.8	92.3	92.3	105.4
				SHC	103.2	119.9	136.7	98.6	114.7	130.7	93.2	108.4	123.6	86.4	100.6	114.8	79.2	92.3	105.4
	62		TC	120	120	142.4	114.7	114.7	136.2	108.5	108.5	128.8	100.7	100.7	119.7	92.4	92.4	109.9	
			SHC	97.6	120	142.4	93.3	114.7	136.2	88.1	108.5	128.8	81.7	100.7	119.7	74.9	92.4	109.9	
	67		TC	126.8	126.8	126.8	120.4	120.4	123.6	113.2	113.2	121.3	103.8	103.8	118.4	93.6	93.6	114	
			SHC	75.7	100.6	125.4	73.6	98.6	123.6	71.2	96.2	121.3	68	93.2	118.4	64.2	89.1	114	
	72	TC	136.5	136.5	136.5	130.2	130.2	130.2	123.2	123.2	123.2	115.5	115.5	115.5	105.6	105.6	105.6		
		SHC	49.1	73.1	97	47.1	71.3	95.4	44.9	69.2	93.5	42.5	67.3	92	39.5	64.9	90.2		
	76	TC	-	142.7	142.7	-	136.5	136.5	-	129.4	129.4	-	121.6	121.6	-	113.6	113.6		
		SHC	-	52.2	76.7	-	50.4	74.7	-	48.2	72.4	-	45.9	70.1	-	43.7	68.3		

* See Minimum–Maximum Airflow Ratings in Table 4. Do not operate outside these limits.

LEGEND:

- Do not operate
- Cfm - Cubic feet per minute (supply air)
- EAT(db) - Entering air temperature (dry bulb)
- EAT(wb) - Entering air temperature (wet bulb)
- SHC - Sensible heat capacity
- TC - Total capacity

Table 8 (cont.) - COOLING CAPACITIES

2-STAGE COOLING

50HC12 (10 TONS) – UNIT WITH HUMIDI-MIZER SYSTEM IN SUBCOOLING MODE										
Temp (F) Air Ent Condenser (Edb)		AIR ENTERING EVAPORATOR – CFM								
		3000			4000			5000		
		Air Entering Evaporator – Ewb (F)								
		72	67	62	72	67	62	72	67	62
75	TC	135.8	123.1	111.6	144.0	130.9	119.2	148.7	135.7	122.9
	SHC	56.7	72.8	88.9	66.1	86.9	107.4	74.4	100.1	121.0
	kW	6.42	6.26	6.13	6.54	6.37	6.22	6.61	6.43	6.26
85	TC	127.3	115.4	104.5	134.9	120.1	111.7	139.3	126.9	116.8
	SHC	48.6	65.4	82.1	57.5	76.6	100.2	65.4	91.8	115.0
	kW	7.20	7.04	6.90	7.31	7.11	7.00	7.38	7.21	7.07
95	TC	118.1	106.5	96.9	125.2	113.6	103.6	129.5	117.8	108.4
	SHC	39.9	57.0	74.9	48.3	70.5	92.4	56.2	83.1	106.8
	kW	8.06	7.89	7.76	8.17	8.00	7.86	8.24	8.07	7.93
105	TC	107.3	97.8	87.8	114.5	103.8	94.5	117.6	107.3	99.0
	SHC	29.6	48.7	66.2	38.1	61.3	83.8	44.9	73.1	97.5
	kW	8.99	8.85	8.72	9.11	8.95	8.82	9.16	9.01	8.88
115	TC	95.7	86.3	78.2	102.1	91.3	83.4	105.7	95.8	88.2
	SHC	18.6	37.8	57.1	26.4	49.4	73.2	33.6	62.3	87.0
	kW	10.03	9.89	9.79	10.14	9.97	9.86	10.20	10.05	9.94
125	TC	83.7	75.2	67.7	87.5	80.1	72.5	92.1	83.1	75.2
	SHC	7.3	27.4	47.2	12.5	38.8	62.9	20.6	50.3	74.2
	kW	11.17	11.06	10.98	11.23	11.13	11.03	11.30	11.17	11.07

50HC12 (10 TONS) – UNIT WITH HUMIDI-MIZER SYSTEM IN HOT GAS REHEAT MODE										
Temp (F) Air Ent Condenser (Edb)		AIR ENTERING EVAPORATOR – Ewb (F)								
		75 Dry Bulb			75 Dry Bulb			75 Dry Bulb		
		62.5 Wet Bulb			64 Wet Bulb			65.3 Wet Bulb		
		(50% Relative)			(56% Relative)			(60% Relative)		
		Air Entering Evaporator – Cfm								
		3000	4000	5000	3000	4000	5000	3000	4000	5000
80	TC	45.83	49.08	50.90	47.62	50.84	52.72	49.16	52.45	54.33
	SHC	4.82	14.45	24.36	-1.60	6.39	14.99	-7.27	-0.59	6.73
	kW	7.33	7.46	7.55	7.40	7.53	7.62	7.46	7.60	7.68
75	TC	48.52	51.89	53.81	50.31	53.74	55.73	51.92	55.47	57.43
	SHC	7.37	17.08	27.08	0.95	9.11	17.81	-4.65	2.25	9.63
	kW	6.93	7.07	7.15	7.00	7.14	7.23	7.06	7.21	7.29
70	TC	51.15	54.66	56.69	52.96	56.60	58.66	54.65	58.34	60.43
	SHC	9.87	19.70	29.80	3.47	11.82	20.57	-2.05	4.98	12.45
	kW	6.56	6.69	6.78	6.62	6.76	6.85	6.68	6.83	6.91
60	TC	52.89	56.41	59.04	55.63	59.10	62.68	58.00	62.31	64.50
	SHC	11.58	21.44	32.07	6.06	14.26	24.41	1.21	8.78	16.36
	kW	6.60	6.80	6.72	6.53	6.71	6.51	6.46	6.48	6.58
50	TC	55.13	59.53	62.75	58.04	62.61	64.69	59.64	64.34	66.41
	SHC	13.77	24.43	35.63	8.41	17.62	26.38	2.80	10.77	18.23
	kW	6.57	6.53	6.44	6.43	6.41	6.54	6.52	6.50	6.64
40	TC	57.08	60.11	64.35	58.75	63.63	65.58	60.16	65.23	69.04
	SHC	15.67	25.05	33.55	9.13	18.64	27.28	3.34	11.67	20.76
	kW	6.51	6.77	6.62	6.64	6.54	6.70	6.75	6.65	6.50

LEGEND

- Edb – Entering Dry-Bulb
- Ewb – Entering Wet-Bulb
- kW – Compressor Motor Power Input
- ldb – Leaving Dry-Bulb
- lwb – Leaving Wet-Bulb
- SHC – Sensible Heat Capacity (1000 Btuh) Gross
- TC – Total Capacity (1000 Btuh) Gross

NOTES:

1. Direct interpolation is permissible. Do not extrapolate.
2. The following formulas may be used:

$$t_{ldb} = t_{edb} - \frac{\text{sensible capacity (Btuh)}}{1.10 \times \text{cfm}}$$

t_{lwb} = Wet-bulb temperature corresponding to enthalpy of air leaving evaporator coil (h_{lwb})

$$h_{lwb} = h_{ewb} - \frac{\text{total capacity (Btuh)}}{4.5 \times \text{cfm}}$$

Where: h_{ewb} = Enthalpy of air entering evaporator coil

Table 8 (cont.) - COOLING CAPACITIES

2-STAGE COOLING

50HC14 (12.5 TONS) – UNIT WITH HUMIDI-MIZER SYSTEM IN SUBCOOLING MODE										
Temp (F) Air Ent Condenser (Edb)		AIR ENTERING EVAPORATOR – CFM								
		3750			5000			6250		
		Air Entering Evaporator – Ewb (F)								
		72	67	62	72	67	62	72	67	62
75	TC	162.0	147.4	132.8	185.6	167.2	148.8	209.5	187.2	164.9
	SHC	85.0	101.4	117.4	96.9	113.0	129.0	106.5	122.4	138.4
	kW	7.70	7.60	7.30	7.90	7.70	7.40	8.10	7.80	7.50
85	TC	154.8	140.9	127.0	171.7	154.4	137.1	188.8	168.0	147.2
	SHC	70.2	90.4	110.6	83.1	103.2	123.2	93.4	113.4	133.3
	kW	8.80	8.70	8.30	8.90	8.70	8.40	9.10	8.80	8.50
95	TC	147.5	134.4	121.2	157.8	141.6	125.4	168.1	148.8	129.6
	SHC	55.5	79.7	103.9	69.3	93.4	117.5	80.4	104.3	128.3
	kW	9.80	9.70	9.30	9.90	9.70	9.50	10.10	9.80	9.60
105	TC	140.3	127.8	115.4	143.8	128.7	113.7	147.4	129.7	111.9
	SHC	40.9	69.0	97.2	55.5	83.6	111.7	67.3	95.3	111.9
	kW	10.80	10.70	10.30	10.90	10.70	10.50	11.10	10.80	10.60
115	TC	133.0	121.3	109.5	129.9	115.9	101.9	126.7	110.5	94.2
	SHC	26.2	58.3	90.4	41.8	73.8	101.9	54.2	86.2	94.2
	kW	11.80	11.70	11.40	11.90	11.70	11.60	12.10	11.80	11.70
125	TC	125.8	114.7	103.7	115.9	103.1	90.2	106.0	91.3	76.6
	SHC	11.5	47.6	83.7	28.0	64.0	90.2	41.2	77.2	76.6
	kW	12.80	12.70	12.40	12.90	12.70	12.60	13.10	12.80	12.70

50HC14 (12.5 TONS) – UNIT WITH HUMIDI-MIZER SYSTEM IN HOT GAS REHEAT MODE										
Temp (F) Air Ent Condenser (Edb)		AIR ENTERING EVAPORATOR – Ewb (F)								
		75 Dry Bulb			75 Dry Bulb			75 Dry Bulb		
		62.5 Wet Bulb			64 Wet Bulb			65.3 Wet Bulb		
		(50% Relative)			(56% Relative)			(60% Relative)		
		Air Entering Evaporator – Cfm								
		3750	5000	6250	3750	5000	6250	3750	5000	6250
80	TC	57.70	60.00	66.40	60.20	66.80	69.50	64.30	69.10	72.30
	SHC	21.30	27.00	44.00	12.80	22.40	32.50	8.60	16.20	25.50
	kW	8.08	8.15	8.23	8.28	8.34	8.37	8.36	8.43	8.52
75	TC	59.00	61.20	67.90	61.40	68.10	71.00	65.80	70.70	73.70
	SHC	22.40	28.10	44.80	13.50	23.50	33.70	9.30	17.10	26.30
	kW	8.06	8.13	8.21	8.25	8.31	8.34	8.33	8.40	8.49
70	TC	60.40	62.90	69.20	63.10	69.40	72.50	67.00	72.00	75.00
	SHC	23.20	28.90	46.00	14.50	24.30	34.40	10.30	17.90	27.40
	kW	8.04	8.11	8.18	8.23	8.29	8.32	8.31	8.38	8.47
60	TC	63.40	65.70	72.00	65.90	72.30	75.20	70.00	74.80	77.80
	SHC	24.80	30.50	47.80	16.10	25.90	36.00	11.90	19.60	29.00
	kW	8.00	8.07	8.15	8.20	8.25	8.29	8.28	8.35	8.44
50	TC	66.20	68.60	74.30	68.80	74.60	78.20	72.80	77.80	80.70
	SHC	26.60	32.30	49.40	17.70	27.70	37.80	13.50	21.20	30.60
	kW	7.94	8.01	8.08	8.13	8.20	8.23	8.22	8.29	8.38
40	TC	69.10	71.60	77.80	71.80	78.00	81.00	75.70	80.60	83.70
	SHC	28.20	33.90	50.10	19.40	29.30	39.80	15.20	22.90	32.20
	kW	7.90	7.97	8.04	8.09	8.15	8.17	8.16	8.23	8.32

LEGEND

- Edb** – Entering Dry–Bulb
- Ewb** – Entering Wet–Bulb
- kW** – Compressor Motor Power Input
- ldb** – Leaving Dry–Bulb
- lwb** – Leaving Wet–Bulb
- SHC** – Sensible Heat Capacity (1000 Btuh) Gross
- TC** – Total Capacity (1000 Btuh) Gross

NOTES:

1. Direct interpolation is permissible. Do not extrapolate.
2. The following formulas may be used:

$$t_{ldb} = t_{edb} - \frac{\text{sensible capacity (Btuh)}}{1.10 \times \text{cfm}}$$

t_{lwb} = Wet–bulb temperature corresponding to enthalpy of air leaving evaporator coil (h_{lwb})

$$h_{lwb} = h_{ewb} - \frac{\text{total capacity (Btuh)}}{4.5 \times \text{cfm}}$$

Where: h_{ewb} = Enthalpy of air entering evaporator coil

Table 9 – STATIC PRESSURE ADDERS (in. wg) - Factory Options and/or Accessories

Electric Heaters

3-5 TONS										
CFM	600	900	1200	1400	1600	1800	2000	2200	2400	2600
1 Electric Heater Module	0.03	0.05	0.07	0.09	0.09	0.10	0.11	0.11	0.12	0.13
2 Electric Heater Modules	0.13	0.15	0.16	0.16	0.16	0.17	0.17	0.17	0.18	0.18

6 - 10 TONS									
CFM	2250	2500	2750	3000	3250	3500	3750	4000	
1 Electric Heater Module	0.031	0.037	0.044	0.051	0.059	0.067	0.076	0.085	
2 Electric Heater Modules	0.038	0.046	0.053	0.062	0.070	0.080	0.089	0.100	

6 - 10 TONS									
CFM	4250	4500	4750	5000	5250	5500	5750	6000	
1 Electric Heater Module	0.095	0.105	0.116	0.127	0.139	0.151	0.164	0.177	
2 Electric Heater Modules	0.110	0.122	0.133	0.146	0.158	0.172	0.185	0.200	

12.5 TON									
CFM	3750	4063	4375	4688	5000	5313	5625	5938	6250
Vertical - 1 Electric Heater Module	0.02	0.02	0.02	0.02	0.03	0.03	0.03	0.03	0.04
Vertical - 2 Electric Heater Modules	0.03	0.04	0.04	0.05	0.05	0.06	0.06	0.07	0.08
Horizontal - 1 Electric Heater Module	0.04	0.05	0.05	0.06	0.06	0.07	0.07	0.08	0.09
Horizontal - 2 Electric Heater Modules	0.04	0.04	0.04	0.05	0.05	0.06	0.06	0.07	0.08


Humidi-MiZer

3-6 TONS									
CFM (in. wg)	1000	1250	1500	1750	2000	2250	2500	2750	3000
3 Tons	0.04	0.052	0.07	-	-	-	-	-	-
4 Tons	-	0.106	0.138	0.172	0.21	-	-	-	-
5 Tons	-	-	0.138	0.172	0.21	0.252	0.30	-	-
6 Tons	-	-	-	0.112	0.125	0.161	0.19	0.22	0.25

7.5-12.5 TONS										
CFM (in. wg)	4000	4250	4500	4750	5000	5250	5500	5750	6000	6250
7.5 Tons	-	-	-	-	-	-	-	-	-	-
8.5 Tons	0.20	0.22	-	-	-	-	-	-	-	-
10 Tons	0.20	0.22	0.24	0.26	0.28	-	-	-	-	-
12.5 Tons	0.06	0.07	0.07	0.08	0.08	0.09	0.10	0.10	0.11	0.12


ECONOMIZER, BAROMETRIC RELIEF AND PE PERFORMANCE

Vertical Application

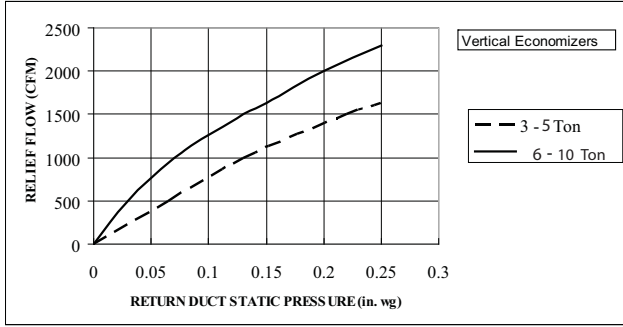


C10475

Fig. 16 - Barometric Relief Flow-Vertical 3-10 Ton

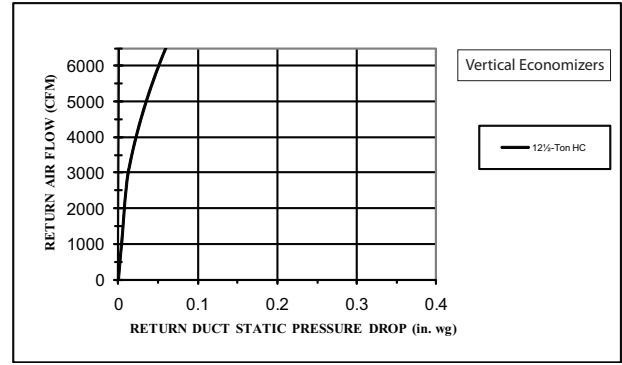


C101005

Fig. 18 - Return Air Pressure Drop-Vertical 12.5 Ton

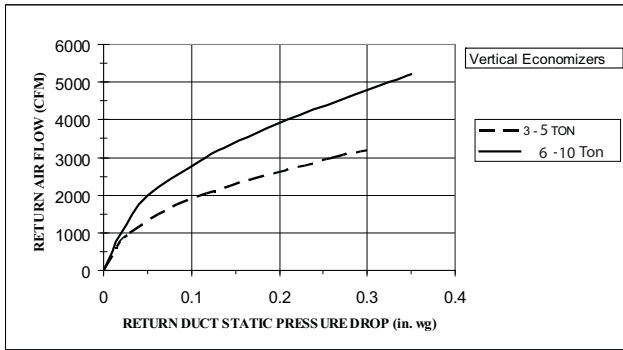


C10477

Fig. 17 - Return Air Pressure Drop-Vertical 3-10 Ton

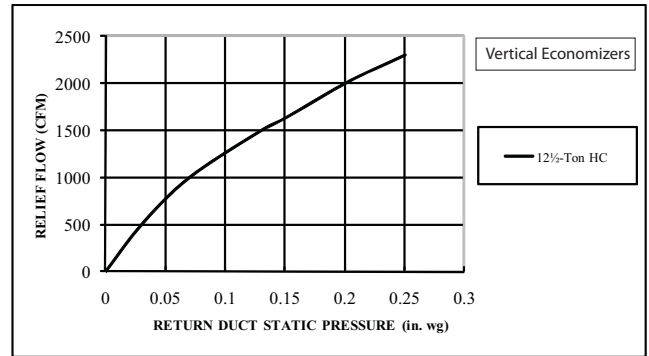

C101004


Fig. 19 - Barometric Relief Flow-Vertical 12.5 Ton

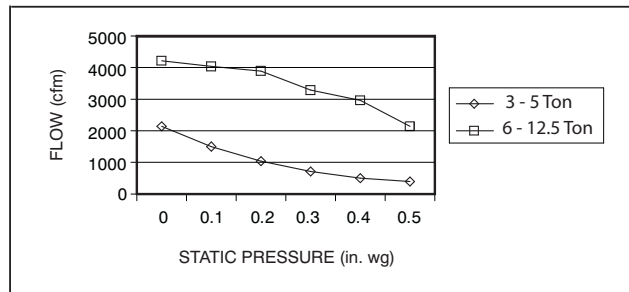

C10996


Fig. 20 - Vertical Power Exhaust Performance

Horizontal Application

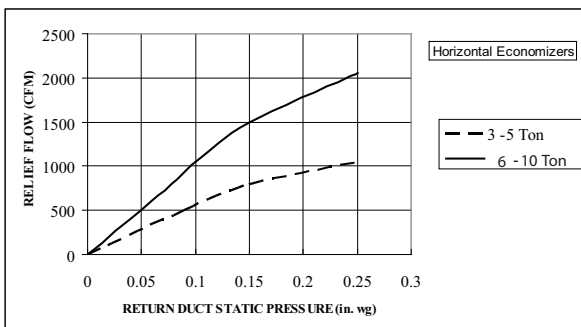

C10472

Fig. 21 - Barometric Relief Flow-Horizontal 3-10 Ton

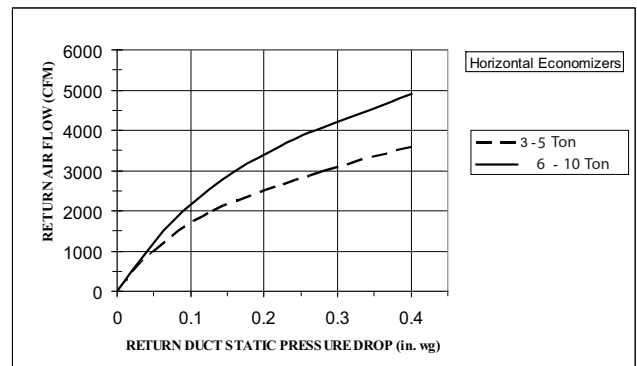

C10474

Fig. 22 - Return Air Pressure Drop-Horizontal 3-10 Ton

ECONOMIZER, BAROMETRIC RELIEF AND PE PERFORMANCE (cont.)

Horizontal Application (cont.)

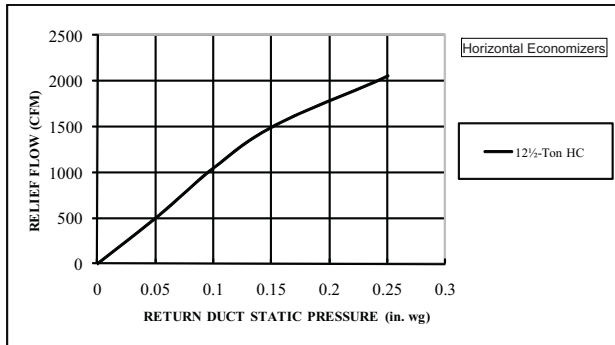


Fig. 23 - Barometric Relief Flow-Horizontal 12.5 Ton

C101002

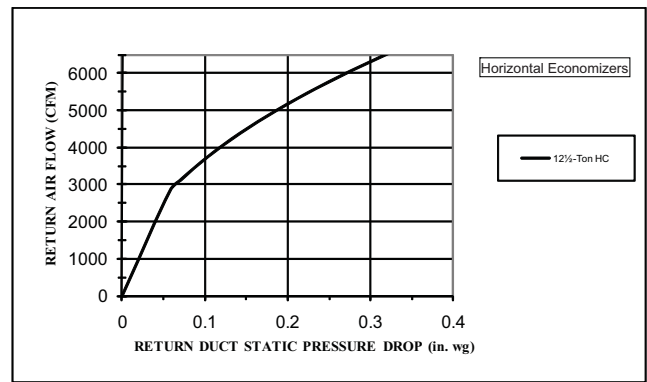


Fig. 24 - Return Air Pressure Drop-Horizontal-12.5 Ton

C101003

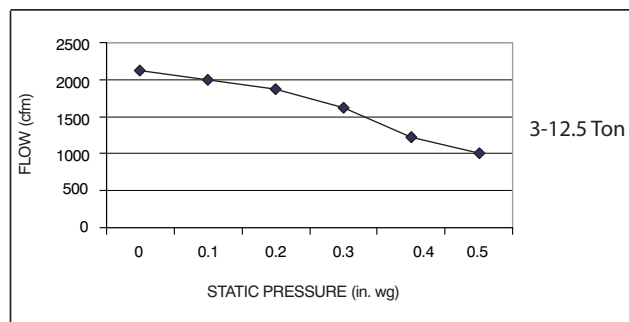


Fig. 25 - Horizontal Power Exhaust Performance

C10995

GENERAL FAN PERFORMANCE NOTES:

1. Interpolation is permissible. Do not extrapolate.
2. External static pressure is the static pressure difference between the return duct and the supply duct plus the static pressure caused by any FIOPs or accessories.
3. Tabular data accounts for pressure loss due to clean filters, unit casing, and wet coils. Factory options and accessories may add static pressure losses. Selection software is available, through your salesperson, to help you select the best motor/drive combination for your application.
4. The Fan Performance tables offer motor/drive recommendations. In cases when two motor/drive combinations would work, Carrier recommended the lower horsepower option.
5. For information on the electrical properties of Carrier motors, please see the Electrical information section of this book.
6. For more information on the performance limits of Carrier motors, see the application data section of this book.
7. The EPACT (Energy Policy Act of 1992) regulates energy requirements for specific types of indoor fan motors. Motors regulated by EPACT include any general purpose, T-frame (three-digit, 143 and larger), single-speed, foot mounted, polyphase, squirrel cage induction motors of NEMA (National Electrical Manufacturers Association) design A and B, manufactured for use in the United States. Ranging from 1 to 200 Hp, these continuous-duty motors operate on 230 and 460 volt, 60 Hz power. If a motor does not fit into these specifications, the motor does not have to be replaced by an EPACT compliant energy-efficient motor. Variable-speed motors are exempt from EPACT compliance requirements.

FAN PERFORMANCE (BELT DRIVE)

Table 10 – 50HC04**

3 PHASE NON-HUMIDI-MIZER

3 TON VERTICAL SUPPLY

CFM	Available External Static Pressure (in. wg)									
	0.2		0.4		0.6		0.8		1.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
900	594	0.15	740	0.25	867	0.37	981	0.52	1084	0.68
975	618	0.17	758	0.28	881	0.40	991	0.55	1092	0.71
1050	642	0.19	777	0.30	896	0.43	1003	0.58	1102	0.75
1125	668	0.22	797	0.34	912	0.47	1017	0.62	1113	0.79
1200	695	0.25	818	0.37	930	0.51	1032	0.66	1126	0.83
1275	722	0.29	841	0.41	949	0.55	1048	0.71	1140	0.88
1350	750	0.33	864	0.46	968	0.60	1065	0.76	1155	0.93
1425	778	0.37	888	0.50	989	0.65	1083	0.81	1171	0.99
1500	807	0.42	913	0.56	1011	0.71	1103	0.87	1188	1.05

CFM	Available External Static Pressure (in. wg)									
	1.2		1.4		1.6		1.8		2.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
900	1180	0.86	1269	1.05	1354	1.25	1434	1.47	1511	1.70
975	1186	0.89	1275	1.08	1358	1.29	1437	1.51	1513	1.74
1050	1194	0.92	1281	1.12	1363	1.32	1441	1.54	1516	1.78
1125	1204	0.97	1289	1.16	1370	1.37	1447	1.59	1520	1.82
1200	1215	1.01	1298	1.21	1378	1.42	1454	1.64	1526	1.87
1275	1227	1.06	1309	1.26	1387	1.47	1462	1.69	1533	1.92
1350	1240	1.12	1321	1.32	1397	1.53	1471	1.75	1541	1.99
1425	1254	1.18	1333	1.38	1409	1.59	1481	1.82	-	-
1500	1270	1.24	1347	1.45	1421	1.66	1492	1.89	-	-

NOTE: For more information, see General Fan Performance Notes.

Boldface indicates field – supplied drive is required.

Medium static 770–1175 RPM, 1.2 BHP max

High static 1035–1466 RPM, 2.4 BHP max

Table 11 – 50HC04**

3 PHASE HUMIDI-MIZER

3 TON VERTICAL SUPPLY

CFM	Available External Static Pressure (in. wg)									
	0.2		0.4		0.6		0.8		1.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
900	594	0.15	740	0.25	867	0.37	981	0.52	1084	0.68
975	618	0.17	758	0.28	881	0.40	991	0.55	1092	0.71
1050	642	0.19	777	0.30	896	0.43	1003	0.58	1102	0.75
1125	668	0.22	797	0.34	912	0.47	1017	0.62	1113	0.79
1200	695	0.25	818	0.37	930	0.51	1032	0.66	1126	0.83
1275	722	0.29	841	0.41	949	0.55	1048	0.71	1140	0.88
1350	750	0.33	864	0.46	968	0.60	1065	0.76	1155	0.93
1425	778	0.37	888	0.50	989	0.65	1083	0.81	1171	0.99
1500	807	0.42	913	0.56	1011	0.71	1103	0.87	1188	1.05

CFM	Available External Static Pressure (in. wg)									
	1.2		1.4		1.6		1.8		2.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
900	1180	0.86	1269	1.05	1354	1.25	1434	1.47	1511	1.70
975	1186	0.89	1275	1.08	1358	1.29	1437	1.51	1513	1.74
1050	1194	0.92	1281	1.12	1363	1.32	1441	1.54	1516	1.78
1125	1204	0.97	1289	1.16	1370	1.37	1447	1.59	1520	1.82
1200	1215	1.01	1298	1.21	1378	1.42	1454	1.64	1526	1.87
1275	1227	1.06	1309	1.26	1387	1.47	1462	1.69	1533	1.92
1350	1240	1.12	1321	1.32	1397	1.53	1471	1.75	1541	1.99
1425	1254	1.18	1333	1.38	1409	1.59	1481	1.82	-	-
1500	1270	1.24	1347	1.45	1421	1.66	1492	1.89	-	-

NOTE: For more information, see General Fan Performance Notes.

Boldface indicates field – supplied drive is required.

Standard static 560–854 RPM, 1.7 BHP max

Medium static 770–1175 RPM, 1.7 BHP max

High static 1035–1466 RPM, 2.4 BHP max

FAN PERFORMANCE (BELT DRIVE) (cont.)

Table 12 – 50HC04**

3 PHASE NON-HUMIDI-MIZER

3 TON HORIZONTAL SUPPLY

CFM	Available External Static Pressure (in. wg)									
	0.2		0.4		0.6		0.8		1.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
900	574	0.13	707	0.23	817	0.34	913	0.47	999	0.61
975	597	0.15	727	0.25	835	0.37	929	0.50	1015	0.64
1050	621	0.18	747	0.28	853	0.40	946	0.53	1030	0.68
1125	646	0.20	768	0.31	872	0.43	964	0.57	1047	0.72
1200	671	0.23	790	0.34	892	0.47	982	0.61	1064	0.76
1275	696	0.26	812	0.38	912	0.51	1001	0.65	1082	0.81
1350	723	0.30	835	0.42	933	0.55	1020	0.70	1100	0.86
1425	749	0.34	859	0.46	955	0.60	1040	0.75	1119	0.91
1500	776	0.38	883	0.51	977	0.65	1061	0.80	1138	0.97

CFM	Available External Static Pressure (in. wg)									
	1.2		1.4		1.6		1.8		2.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
900	1078	0.77	1151	0.93	1220	1.11	1284	1.30	1346	1.49
975	1093	0.80	1165	0.97	1233	1.15	1297	1.33	1358	1.53
1050	1108	0.84	1180	1.01	1247	1.19	1311	1.38	1371	1.58
1125	1123	0.88	1195	1.05	1261	1.23	1325	1.42	1385	1.62
1200	1140	0.92	1210	1.10	1276	1.28	1339	1.47	1399	1.68
1275	1157	0.97	1226	1.15	1292	1.33	1354	1.53	1414	1.73
1350	1174	1.02	1243	1.20	1308	1.39	1370	1.59	1429	1.80
1425	1192	1.08	1260	1.26	1325	1.45	1386	1.65	1444	1.86
1500	1210	1.14	1278	1.33	1342	1.52	1403	1.72	1461	1.93

NOTE: For more information, see General Fan Performance Notes.

Boldface indicates field – supplied drive is required.

Medium static 770–1175 RPM, 1.7 BHP max

High static 1035–1466 RPM, 2.4 BHP max

Table 13 – 50HC04**

3 PHASE HUMIDI-MIZER

3 TON HORIZONTAL SUPPLY

CFM	Available External Static Pressure (in. wg)									
	0.2		0.4		0.6		0.8		1.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
900	574	0.13	707	0.23	817	0.34	913	0.47	999	0.61
975	597	0.15	727	0.25	835	0.37	929	0.50	1015	0.64
1050	621	0.18	747	0.28	853	0.40	946	0.53	1030	0.68
1125	646	0.20	768	0.31	872	0.43	964	0.57	1047	0.72
1200	671	0.23	790	0.34	892	0.47	982	0.61	1064	0.76
1275	696	0.26	812	0.38	912	0.51	1001	0.65	1082	0.81
1350	723	0.30	835	0.42	933	0.55	1020	0.70	1100	0.86
1425	749	0.34	859	0.46	955	0.60	1040	0.75	1119	0.91
1500	776	0.38	883	0.51	977	0.65	1061	0.80	1138	0.97

CFM	Available External Static Pressure (in. wg)									
	1.2		1.4		1.6		1.8		2.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
900	1078	0.77	1151	0.93	1220	1.11	1284	1.30	1346	1.49
975	1093	0.80	1165	0.97	1233	1.15	1297	1.33	1358	1.53
1050	1108	0.84	1180	1.01	1247	1.19	1311	1.38	1371	1.58
1125	1123	0.88	1195	1.05	1261	1.23	1325	1.42	1385	1.62
1200	1140	0.92	1210	1.10	1276	1.28	1339	1.47	1399	1.68
1275	1157	0.97	1226	1.15	1292	1.33	1354	1.53	1414	1.73
1350	1174	1.02	1243	1.20	1308	1.39	1370	1.59	1429	1.80
1425	1192	1.08	1260	1.26	1325	1.45	1386	1.65	1444	1.86
1500	1210	1.14	1278	1.33	1342	1.52	1403	1.72	1461	1.93

NOTE: For more information, see General Fan Performance Notes.

Boldface indicates field – supplied drive is required.

Standard static 560–854 RPM, 1.7 BHP max

Medium static 770–1175 RPM, 1.7 BHP max

High static 1035–1466 RPM, 2.4 BHP max

FAN PERFORMANCE (BELT DRIVE) (cont.)

Table 14 – 50HC05**

3 PHASE NON-HUMIDI-MIZER

4 TON VERTICAL SUPPLY

CFM	Available External Static Pressure (in. wg)									
	0.2		0.4		0.6		0.8		1.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
1200	695	0.25	818	0.37	930	0.51	1032	0.66	1126	0.83
1300	731	0.30	849	0.43	955	0.57	1053	0.72	1145	0.89
1400	769	0.36	880	0.49	982	0.63	1077	0.79	1166	0.97
1500	807	0.42	913	0.56	1011	0.71	1103	0.87	1188	1.05
1600	847	0.49	948	0.63	1042	0.79	1130	0.96	1213	1.14
1700	887	0.57	983	0.72	1073	0.88	1158	1.06	1239	1.24
1800	928	0.66	1020	0.82	1106	0.98	1188	1.16	1266	1.35
1900	969	0.76	1057	0.92	1140	1.09	1219	1.28	1295	1.48
2000	1010	0.87	1095	1.04	1175	1.21	1251	1.41	1325	1.61

CFM	Available External Static Pressure (in. wg)									
	1.2		1.4		1.6		1.8		2.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
1200	1215	1.01	1298	1.21	1378	1.42	1454	1.64	1526	1.87
1300	1231	1.08	1313	1.28	1390	1.49	1465	1.71	1536	1.94
1400	1249	1.16	1329	1.36	1405	1.57	1478	1.79	1547	2.03
1500	1270	1.24	1347	1.45	1421	1.66	1492	1.89	1561	2.13
1600	1292	1.34	1367	1.54	1440	1.76	1509	1.99	1576	2.23
1700	1315	1.44	1389	1.65	1459	1.88	1527	2.11	1593	2.35
1800	1341	1.56	1412	1.77	1481	2.00	1547	2.23	1612	2.48
1900	1367	1.68	1437	1.90	1504	2.13	1569	2.37	1632	2.62
2000	1395	1.82	1463	2.04	1528	2.28	1591	2.52	1653	2.77

NOTE: For more information, see General Fan Performance Notes.

Boldface indicates field – supplied drive is required.

Medium Static 920 – 1303 RPM, 1.7 BHP max

High Static 1208 – 1639 RPM, 2.9 BHP max

Table 15 – 50HC05**

3 PHASE HUMIDI-MIZER

4 TON VERTICAL SUPPLY

CFM	Available External Static Pressure (in. wg)									
	0.2		0.4		0.6		0.8		1.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
1200	695	0.25	818	0.37	930	0.51	1032	0.66	1126	0.83
1300	731	0.30	849	0.43	955	0.57	1053	0.72	1145	0.89
1400	769	0.36	880	0.49	982	0.63	1077	0.79	1166	0.97
1500	807	0.42	913	0.56	1011	0.71	1103	0.87	1188	1.05
1600	847	0.49	948	0.63	1042	0.79	1130	0.96	1213	1.14
1700	887	0.57	983	0.72	1073	0.88	1158	1.06	1239	1.24
1800	928	0.66	1020	0.82	1106	0.98	1188	1.16	1266	1.35
1900	969	0.76	1057	0.92	1140	1.09	1219	1.28	1295	1.48
2000	1010	0.87	1095	1.04	1175	1.21	1251	1.41	1325	1.61

CFM	Available External Static Pressure (in. wg)									
	1.2		1.4		1.6		1.8		2.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
1200	1215	1.01	1298	1.21	1378	1.42	1454	1.64	1526	1.87
1300	1231	1.08	1313	1.28	1390	1.49	1465	1.71	1536	1.94
1400	1249	1.16	1329	1.36	1405	1.57	1478	1.79	1547	2.03
1500	1270	1.24	1347	1.45	1421	1.66	1492	1.89	1561	2.13
1600	1292	1.34	1367	1.54	1440	1.76	1509	1.99	1576	2.23
1700	1315	1.44	1389	1.65	1459	1.88	1527	2.11	1593	2.35
1800	1341	1.56	1412	1.77	1481	2.00	1547	2.23	1612	2.48
1900	1367	1.68	1437	1.90	1504	2.13	1569	2.37	1632	2.62
2000	1395	1.82	1463	2.04	1528	2.28	1591	2.52	1653	2.77

NOTE: For more information, see General Fan Performance Notes.

Boldface indicates field – supplied drive is required.

Standard Static 560 – 854 RPM, 1.7 BHP max

Medium Static 770 – 1175 RPM, 1.7 BHP max

High Static 1208 – 1639 RPM, 2.9 BHP max

FAN PERFORMANCE (BELT DRIVE) (cont.)

Table 16 – 50HC05**

3 PHASE NON-HUMIDI-MIZER

4 TON HORIZONTAL SUPPLY

CFM	Available External Static Pressure (in. wg)									
	0.2		0.4		0.6		0.8		1.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
1200	671	0.23	790	0.34	892	0.47	982	0.61	1064	0.76
1300	705	0.28	820	0.39	919	0.52	1007	0.67	1088	0.82
1400	740	0.33	851	0.45	947	0.58	1034	0.73	1113	0.89
1500	776	0.38	883	0.51	977	0.65	1061	0.80	1138	0.97
1600	813	0.45	916	0.58	1007	0.73	1089	0.89	1165	1.05
1700	851	0.52	949	0.66	1038	0.81	1118	0.97	1192	1.15
1800	888	0.60	984	0.75	1069	0.90	1148	1.07	1221	1.25
1900	927	0.69	1019	0.84	1102	1.00	1179	1.18	1250	1.36
2000	965	0.78	1054	0.94	1135	1.11	1210	1.29	1280	1.48

CFM	Available External Static Pressure (in. wg)									
	1.2		1.4		1.6		1.8		2.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
1200	1140	0.92	1210	1.10	1276	1.28	1339	1.47	1399	1.68
1300	1162	0.99	1232	1.16	1297	1.35	1360	1.55	1419	1.75
1400	1186	1.06	1254	1.24	1319	1.43	1381	1.63	1439	1.84
1500	1210	1.14	1278	1.33	1342	1.52	1403	1.72	1461	1.93
1600	1236	1.23	1302	1.42	1365	1.62	1425	1.82	1483	2.04
1700	1262	1.33	1328	1.52	1390	1.72	1449	1.93	1505	2.15
1800	1289	1.44	1354	1.63	1415	1.84	1473	2.05	1529	2.27
1900	1317	1.55	1380	1.75	1441	1.96	1498	2.18	1553	2.41
2000	1345	1.68	1408	1.88	1467	2.10	1524	2.32	1579	2.55

NOTE: For more information, see General Fan Performance Notes.

Boldface indicates field – supplied drive is required.

Medium Static 920 – 1303 RPM, 1.7 BHP max

High Static 1208 – 1639 RPM, 2.9 max BHP

Table 17 – 50HC05**

3 PHASE HUMIDI-MIZER

4 TON HORIZONTAL SUPPLY

CFM	Available External Static Pressure (in. wg)									
	0.2		0.4		0.6		0.8		1.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
1200	671	0.23	790	0.34	892	0.47	982	0.61	1064	0.76
1300	705	0.28	820	0.39	919	0.52	1007	0.67	1088	0.82
1400	740	0.33	851	0.45	947	0.58	1034	0.73	1113	0.89
1500	776	0.38	883	0.51	977	0.65	1061	0.80	1138	0.97
1600	813	0.45	916	0.58	1007	0.73	1089	0.89	1165	1.05
1700	851	0.52	949	0.66	1038	0.81	1118	0.97	1192	1.15
1800	888	0.60	984	0.75	1069	0.90	1148	1.07	1221	1.25
1900	927	0.69	1019	0.84	1102	1.00	1179	1.18	1250	1.36
2000	965	0.78	1054	0.94	1135	1.11	1210	1.29	1280	1.48

CFM	Available External Static Pressure (in. wg)									
	1.2		1.4		1.6		1.8		2.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
1200	1140	0.92	1210	1.10	1276	1.28	1339	1.47	1399	1.68
1300	1162	0.99	1232	1.16	1297	1.35	1360	1.55	1419	1.75
1400	1186	1.06	1254	1.24	1319	1.43	1381	1.63	1439	1.84
1500	1210	1.14	1278	1.33	1342	1.52	1403	1.72	1461	1.93
1600	1236	1.23	1302	1.42	1365	1.62	1425	1.82	1483	2.04
1700	1262	1.33	1328	1.52	1390	1.72	1449	1.93	1505	2.15
1800	1289	1.44	1354	1.63	1415	1.84	1473	2.05	1529	2.27
1900	1317	1.55	1380	1.75	1441	1.96	1498	2.18	1553	2.41
2000	1345	1.68	1408	1.88	1467	2.10	1524	2.32	1579	2.55

NOTE: For more information, see General Fan Performance Notes.

Boldface indicates field – supplied drive is required.

Standard Static 560 – 854 RPM, 1.7 BHP max

Medium Static 770 – 1175 RPM, 1.7 BHP max

High Static 1208 – 1639 RPM, 2.9 BHP max

FAN PERFORMANCE (BELT DRIVE) (cont.)

Table 18 – 50HC06**

3 PHASE NON-HUMIDI-MIZER

5 TON VERTICAL SUPPLY

CFM	Available External Static Pressure (in. wg)									
	0.2		0.4		0.6		0.8		1.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
1500	794	0.41	902	0.55	993	0.69	1074	0.85	1147	1.00
1625	840	0.49	945	0.64	1034	0.80	1113	0.96	1185	1.13
1750	888	0.59	988	0.75	1075	0.92	1153	1.09	1223	1.26
1875	936	0.70	1033	0.87	1117	1.05	1193	1.23	1263	1.41
2000	984	0.82	1078	1.00	1160	1.19	1235	1.39	1303	1.58
2125	1033	0.96	1124	1.15	1204	1.35	1277	1.56	1343	1.76
2250	1083	1.11	1170	1.32	1248	1.53	1319	1.74	1385	1.96
2375	1133	1.28	1217	1.50	1293	1.72	1363	1.95	1427	2.17
2500	1183	1.47	1265	1.70	1339	1.93	1406	2.17	1470	2.41

CFM	Available External Static Pressure (in. wg)									
	1.2		1.4		1.6		1.8		2.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
1500	1214	1.16	1277	1.33	1336	1.50	1392	1.67	1445	1.85
1625	1251	1.30	1313	1.47	1371	1.65	1427	1.83	1479	2.02
1750	1289	1.44	1350	1.63	1407	1.81	1462	2.01	1514	2.20
1875	1327	1.60	1387	1.80	1444	1.99	1498	2.19	1550	2.40
2000	1366	1.78	1426	1.98	1482	2.19	1535	2.40	1586	2.61
2125	1406	1.97	1464	2.18	1520	2.40	1573	2.62	1623	2.84
2250	1446	2.18	1504	2.40	1559	2.62	1611	2.85	1661	3.09
2375	1487	2.40	1544	2.63	1598	2.87	1650	3.11	–	–
2500	1529	2.64	1585	2.89	1638	3.13	–	–	–	–

NOTE: For more information, see General Fan Performance Notes.

Boldface indicates field – supplied drive is required.

Medium Static 1035 – 1466 RPM, 2.4 BHP max

High Static 1303 – 1687 RPM, 2.9 max BHP

Table 19 – 50HC06**

3 PHASE HUMIDI-MIZER

5 TON VERTICAL SUPPLY

CFM	Available External Static Pressure (in. wg)									
	0.2		0.4		0.6		0.8		1.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
1500	794	0.41	902	0.55	993	0.69	1074	0.85	1147	1.00
1625	840	0.49	945	0.64	1034	0.80	1113	0.96	1185	1.13
1750	888	0.59	988	0.75	1075	0.92	1153	1.09	1223	1.26
1875	936	0.70	1033	0.87	1117	1.05	1193	1.23	1263	1.41
2000	984	0.82	1078	1.00	1160	1.19	1235	1.39	1303	1.58
2125	1033	0.96	1124	1.15	1204	1.35	1277	1.56	1343	1.76
2250	1083	1.11	1170	1.32	1248	1.53	1319	1.74	1385	1.96
2375	1133	1.28	1217	1.50	1293	1.72	1363	1.95	1427	2.17
2500	1183	1.47	1265	1.70	1339	1.93	1406	2.17	1470	2.41

CFM	Available External Static Pressure (in. wg)									
	1.2		1.4		1.6		1.8		2.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
1500	1214	1.16	1277	1.33	1336	1.50	1392	1.67	1445	1.85
1625	1251	1.30	1313	1.47	1371	1.65	1427	1.83	1479	2.02
1750	1289	1.44	1350	1.63	1407	1.81	1462	2.01	1514	2.20
1875	1327	1.60	1387	1.80	1444	1.99	1498	2.19	1550	2.40
2000	1366	1.78	1426	1.98	1482	2.19	1535	2.40	1586	2.61
2125	1406	1.97	1464	2.18	1520	2.40	1573	2.62	1623	2.84
2250	1446	2.18	1504	2.40	1559	2.62	1611	2.85	1661	3.09
2375	1487	2.40	1544	2.63	1598	2.87	1650	3.11	–	–
2500	1529	2.64	1585	2.89	1638	3.13	–	–	–	–

NOTE: For more information, see General Fan Performance Notes.

Boldface indicates field – supplied drive is required.

Standard Static 770 – 1175 RPM, 1.7 BHP max

Medium Static 1035 – 1466 RPM, 2.4 BHP max

High Static 1303 – 1687 RPM, 2.9 BHP max

FAN PERFORMANCE (BELT DRIVE) (cont.)

Table 20 – 50HC06**

3 PHASE NON-HUMIDI-MIZER

5 TON HORIZONTAL SUPPLY

CFM	Available External Static Pressure (in. wg)									
	0.2		0.4		0.6		0.8		1.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
1500	725	0.33	840	0.46	937	0.60	1023	0.75	1101	0.90
1625	765	0.40	876	0.54	970	0.68	1054	0.84	1131	1.00
1750	806	0.48	912	0.63	1004	0.78	1087	0.94	1162	1.11
1875	847	0.57	950	0.72	1039	0.88	1120	1.05	1194	1.23
2000	889	0.66	988	0.83	1075	1.00	1154	1.18	1226	1.36
2125	931	0.78	1027	0.95	1112	1.13	1189	1.31	1260	1.50
2250	974	0.90	1067	1.08	1149	1.27	1224	1.46	1294	1.66
2375	1018	1.03	1107	1.23	1187	1.43	1261	1.63	1329	1.84
2500	1061	1.19	1148	1.39	1226	1.59	1297	1.81	1364	2.02

CFM	Available External Static Pressure (in. wg)									
	1.2		1.4		1.6		1.8		2.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
1500	1172	1.06	1239	1.23	1302	1.40	1361	1.58	1418	1.77
1625	1201	1.16	1267	1.34	1329	1.52	1388	1.71	1444	1.90
1750	1231	1.28	1296	1.46	1358	1.65	1416	1.84	1472	2.04
1875	1262	1.41	1326	1.60	1387	1.79	1445	1.99	1499	2.20
2000	1294	1.55	1357	1.74	1417	1.95	1474	2.15	1528	2.36
2125	1326	1.70	1388	1.90	1447	2.11	1504	2.33	1557	2.55
2250	1359	1.87	1420	2.08	1479	2.29	1534	2.51	1587	2.74
2375	1393	2.05	1453	2.27	1511	2.49	1566	2.72	1618	2.95
2500	1427	2.24	1487	2.47	1543	2.70	1597	2.94	1649	3.18

NOTE: For more information, see General Fan Performance Notes.

Boldface indicates field – supplied drive is required.

Medium Static 1035 – 1466 RPM, 2.4 BHP max

High Static 1303 – 1687 RPM, 2.9 BHP max

Table 21 – 50HC06**

3 PHASE HUMIDI-MIZER

5 TON HORIZONTAL SUPPLY

CFM	Available External Static Pressure (in. wg)									
	0.2		0.4		0.6		0.8		1.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
1500	725	0.33	840	0.46	937	0.60	1023	0.75	1101	0.90
1625	765	0.40	876	0.54	970	0.68	1054	0.84	1131	1.00
1750	806	0.48	912	0.63	1004	0.78	1087	0.94	1162	1.11
1875	847	0.57	950	0.72	1039	0.88	1120	1.05	1194	1.23
2000	889	0.66	988	0.83	1075	1.00	1154	1.18	1226	1.36
2125	931	0.78	1027	0.95	1112	1.13	1189	1.31	1260	1.50
2250	974	0.90	1067	1.08	1149	1.27	1224	1.46	1294	1.66
2375	1018	1.03	1107	1.23	1187	1.43	1261	1.63	1329	1.84
2500	1061	1.19	1148	1.39	1226	1.59	1297	1.81	1364	2.02

CFM	Available External Static Pressure (in. wg)									
	1.2		1.4		1.6		1.8		2.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
1500	1172	1.06	1239	1.23	1302	1.40	1361	1.58	1418	1.77
1625	1201	1.16	1267	1.34	1329	1.52	1388	1.71	1444	1.90
1750	1231	1.28	1296	1.46	1358	1.65	1416	1.84	1472	2.04
1875	1262	1.41	1326	1.60	1387	1.79	1445	1.99	1499	2.20
2000	1294	1.55	1357	1.74	1417	1.95	1474	2.15	1528	2.36
2125	1326	1.70	1388	1.90	1447	2.11	1504	2.33	1557	2.55
2250	1359	1.87	1420	2.08	1479	2.29	1534	2.51	1587	2.74
2375	1393	2.05	1453	2.27	1511	2.49	1566	2.72	1618	2.95
2500	1427	2.24	1487	2.47	1543	2.70	1597	2.94	1649	3.18

NOTE: For more information, see General Fan Performance Notes.

Boldface indicates field – supplied drive is required.

Standard Static 770 – 1175 RPM 1.7 BHP max

Medium Static 1035 – 1466 2.4 BHP max

High Static 1303 – 1687 2.9 BHP max

FAN PERFORMANCE (BELT DRIVE) (cont.)

Table 22 – 50HC07**

3 PHASE

6 TON VERTICAL SUPPLY

CFM	Available External Static Pressure (in. wg)									
	0.2		0.4		0.6		0.8		1.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
1800	446	0.33	534	0.50	609	0.70	676	0.91	736	1.14
1950	467	0.39	552	0.57	625	0.77	690	0.99	750	1.23
2100	489	0.45	571	0.64	642	0.86	706	1.08	764	1.33
2250	511	0.53	591	0.73	660	0.95	722	1.19	779	1.44
2400	534	0.61	611	0.82	678	1.05	739	1.30	795	1.56
2550	558	0.71	631	0.93	697	1.17	756	1.42	811	1.69
2700	581	0.81	652	1.04	716	1.29	774	1.55	828	1.83
2850	605	0.93	674	1.17	736	1.43	792	1.70	845	1.98
3000	630	1.06	696	1.31	756	1.58	811	1.86	863	2.15

CFM	Available External Static Pressure (in. wg)									
	1.2		1.4		1.6		1.8		2.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
1800	791	1.39	843	1.65	892	1.93	938	2.22	981	2.53
1950	804	1.49	855	1.76	903	2.04	949	2.34	992	2.65
2100	818	1.59	868	1.87	915	2.16	961	2.46	1003	2.78
2250	832	1.71	882	1.99	928	2.29	973	2.59	1015	2.92
2400	847	1.83	896	2.12	942	2.43	986	2.74	1028	3.07
2550	862	1.97	910	2.27	956	2.58	999	2.90	1041	3.23
2700	878	2.12	926	2.42	971	2.74	1013	3.07	1055	3.41
2850	895	2.28	941	2.59	986	2.92	1028	3.25	1069	3.60
3000	912	2.46	958	2.78	1001	3.11	1043	3.45	1083	3.80

NOTE: For more information, see General Fan Performance Notes.

- Standard static 489–747 RPM, 1.7 BHP max
- Medium static 733–949 RPM, 2.9 BHP max
- High static 909–1102 RPM, 4.7 BHP max

Table 23 – 50HC07**

3 PHASE

6 TON HORIZONTAL SUPPLY

CFM	Available External Static Pressure (in. wg)									
	0.2		0.4		0.6		0.8		1.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
1800	415	0.28	510	0.46	588	0.65	655	0.85	715	1.08
1950	431	0.32	525	0.51	601	0.71	668	0.93	727	1.16
2100	448	0.38	540	0.57	615	0.78	681	1.01	740	1.25
2250	465	0.43	555	0.64	629	0.86	694	1.10	753	1.34
2400	483	0.49	571	0.71	644	0.94	708	1.19	766	1.45
2550	501	0.56	587	0.79	659	1.04	722	1.29	779	1.56
2700	519	0.64	603	0.88	674	1.14	737	1.40	793	1.68
2850	538	0.72	620	0.98	689	1.24	751	1.52	807	1.80
3000	557	0.82	637	1.08	705	1.36	766	1.64	822	1.94

CFM	Available External Static Pressure (in. wg)									
	1.2		1.4		1.6		1.8		2.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
1800	770	1.31	821	1.56	868	1.82	913	2.09	955	2.36
1950	782	1.40	832	1.66	879	1.92	924	2.20	966	2.49
2100	794	1.50	844	1.76	891	2.03	935	2.32	977	2.61
2250	806	1.60	856	1.87	903	2.15	947	2.45	988	2.75
2400	819	1.71	868	1.99	915	2.28	958	2.58	1000	2.89
2550	832	1.83	881	2.12	927	2.42	971	2.73	1012	3.05
2700	845	1.96	894	2.26	940	2.57	983	2.88	1024	3.21
2850	859	2.10	907	2.41	953	2.72	995	3.05	1036	3.38
3000	873	2.24	921	2.56	966	2.89	1008	3.22	1049	3.56

NOTE: For more information, see General Fan Performance Notes.

- Standard static 489–747 RPM, 1.7 BHP max
- Medium static 733–949 RPM, 2.9 BHP max
- High static 909–1102 RPM, 4.7 BHP max

FAN PERFORMANCE (BELT DRIVE) (cont.)

Table 24 – 50HC08**

3 PHASE

7.5 TON VERTICAL SUPPLY

CFM	Available External Static Pressure (in. wg)									
	0.2		0.4		0.6		0.8		1.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
2250	482	0.36	577	0.51	659	0.66	732	0.82	799	0.98
2438	505	0.43	597	0.59	676	0.75	748	0.92	813	1.09
2625	529	0.51	617	0.68	694	0.85	764	1.03	827	1.22
2813	554	0.60	638	0.78	713	0.97	781	1.16	843	1.35
3000	579	0.70	660	0.89	732	1.09	799	1.29	860	1.50
3188	604	0.81	683	1.02	753	1.23	817	1.44	877	1.65
3375	630	0.94	706	1.15	774	1.37	836	1.60	895	1.82
3563	657	1.08	729	1.31	795	1.54	856	1.77	913	2.01
3750	683	1.23	753	1.47	817	1.71	877	1.96	933	2.21

CFM	Available External Static Pressure (in. wg)									
	1.2		1.4		1.6		1.8		2.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
2250	860	1.14	917	1.31	971	1.48	1022	1.66	1071	1.84
2438	873	1.27	929	1.45	983	1.63	1033	1.81	1081	2.00
2625	887	1.40	942	1.59	995	1.78	1045	1.98	1092	2.18
2813	901	1.55	956	1.75	1008	1.95	1057	2.15	1104	2.36
3000	917	1.70	970	1.91	1021	2.13	1070	2.34	1117	2.56
3188	933	1.87	986	2.09	1036	2.32	1084	2.54	1130	2.77
3375	950	2.05	1002	2.29	1051	2.52	1098	2.76	1144	3.00
3563	967	2.25	1018	2.49	1067	2.74	1113	2.99	1158	3.24
3750	985	2.46	1035	2.71	1083	2.97	1129	3.23	1173	3.49

NOTE: For more information, see General Fan Performance Notes.

- Standard static 518–733 RPM, 1.7 BHP max
- Medium static 690–936 RPM, 2.4 BHP max
- High static 838–1084 RPM, 3.7 BHP max

Table 25 – 50HC08**

3 PHASE

7.5 TON HORIZONTAL SUPPLY

CFM	Available External Static Pressure (in. wg)									
	0.2		0.4		0.6		0.8		1.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
2250	433	0.29	518	0.41	596	0.54	667	0.67	733	0.81
2438	454	0.35	535	0.48	609	0.61	677	0.75	741	0.90
2625	477	0.42	553	0.55	624	0.69	689	0.84	751	1.00
2813	500	0.49	572	0.64	640	0.78	703	0.94	763	1.10
3000	523	0.58	592	0.73	657	0.88	718	1.05	775	1.22
3188	547	0.68	613	0.83	675	1.00	733	1.17	789	1.34
3375	571	0.78	634	0.95	694	1.12	750	1.30	804	1.48
3563	596	0.90	656	1.07	713	1.25	768	1.44	820	1.63
3750	621	1.03	679	1.21	734	1.40	786	1.59	837	1.79

CFM	Available External Static Pressure (in. wg)									
	1.2		1.4		1.6		1.8		2.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
2250	795	0.96	854	1.11	910	1.27	963	1.43	1014	1.60
2438	802	1.05	859	1.21	913	1.38	966	1.55	1016	1.72
2625	810	1.16	865	1.32	919	1.49	970	1.67	1019	1.85
2813	819	1.27	874	1.44	925	1.62	975	1.80	1023	1.99
3000	830	1.39	883	1.57	934	1.76	982	1.95	1029	2.14
3188	843	1.53	894	1.71	943	1.90	990	2.10	1036	2.30
3375	856	1.67	905	1.86	953	2.06	1000	2.27	1045	2.48
3563	870	1.83	918	2.03	965	2.23	1010	2.44	1054	2.66
3750	885	1.99	932	2.20	978	2.42	1022	2.64	1065	2.86

NOTE: For more information, see General Fan Performance Notes.

- Standard static 518–733 RPM, 1.7 BHP max
- Medium static 690–936 RPM, 2.4 BHP max
- High static 838–1084 RPM, 3.7 BHP max

FAN PERFORMANCE (BELT DRIVE) (cont.)

Table 26 – 50HC09**

3 PHASE

8.5 TON VERTICAL SUPPLY

CFM	Available External Static Pressure (in. wg)									
	0.2		0.4		0.6		0.8		1.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
2250	482	0.36	577	0.51	659	0.66	732	0.82	799	0.98
2438	505	0.43	597	0.59	676	0.75	748	0.92	813	1.09
2625	529	0.51	617	0.68	694	0.85	764	1.03	827	1.22
2813	554	0.60	638	0.78	713	0.97	781	1.16	843	1.35
3000	579	0.70	660	0.89	732	1.09	799	1.29	860	1.50
3188	604	0.81	683	1.02	753	1.23	817	1.44	877	1.65
3375	630	0.94	706	1.15	774	1.37	836	1.60	895	1.82
3563	657	1.08	729	1.31	795	1.54	856	1.77	913	2.01
3750	683	1.23	753	1.47	817	1.71	877	1.96	933	2.21

CFM	Available External Static Pressure (in. wg)									
	1.2		1.4		1.6		1.8		2.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
2250	860	1.14	917	1.31	971	1.48	1022	1.66	1071	1.84
2438	873	1.27	929	1.45	983	1.63	1033	1.81	1081	2.00
2625	887	1.40	942	1.59	995	1.78	1045	1.98	1092	2.18
2813	901	1.55	956	1.75	1008	1.95	1057	2.15	1104	2.36
3000	917	1.70	970	1.91	1021	2.13	1070	2.34	1117	2.56
3188	933	1.87	986	2.09	1036	2.32	1084	2.54	1130	2.77
3375	950	2.05	1002	2.29	1051	2.52	1098	2.76	1144	3.00
3563	967	2.25	1018	2.49	1067	2.74	1113	2.99	1158	3.24
3750	985	2.46	1035	2.71	1083	2.97	1129	3.23	1173	3.49

NOTE: For more information, see General Fan Performance Notes.

- Standard static 518–733 RPM, 1.7 BHP max
- Medium static 690–936 RPM, 2.4 BHP max
- High static 838–1084 RPM, 3.7 BHP max

Table 27 – 50HC09**

3 PHASE

8.5 TON HORIZONTAL SUPPLY

CFM	Available External Static Pressure (in. wg)									
	0.2		0.4		0.6		0.8		1.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
2250	433	0.29	518	0.41	596	0.54	667	0.67	733	0.81
2438	454	0.35	535	0.48	609	0.61	677	0.75	741	0.90
2625	477	0.42	553	0.55	624	0.69	689	0.84	751	1.00
2813	500	0.49	572	0.64	640	0.78	703	0.94	763	1.10
3000	523	0.58	592	0.73	657	0.88	718	1.05	775	1.22
3188	547	0.68	613	0.83	675	1.00	733	1.17	789	1.34
3375	571	0.78	634	0.95	694	1.12	750	1.30	804	1.48
3563	596	0.90	656	1.07	713	1.25	768	1.44	820	1.63
3750	621	1.03	679	1.21	734	1.40	786	1.59	837	1.79

CFM	Available External Static Pressure (in. wg)									
	1.2		1.4		1.6		1.8		2.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
2250	795	0.96	854	1.11	910	1.27	963	1.43	1014	1.60
2438	802	1.05	859	1.21	913	1.38	966	1.55	1016	1.72
2625	810	1.16	865	1.32	919	1.49	970	1.67	1019	1.85
2813	819	1.27	874	1.44	925	1.62	975	1.80	1023	1.99
3000	830	1.39	883	1.57	934	1.76	982	1.95	1029	2.14
3188	843	1.53	894	1.71	943	1.90	990	2.10	1036	2.30
3375	856	1.67	905	1.86	953	2.06	1000	2.27	1045	2.48
3563	870	1.83	918	2.03	965	2.23	1010	2.44	1054	2.66
3750	885	1.99	932	2.20	978	2.42	1022	2.64	1065	2.86

NOTE: For more information, see General Fan Performance Notes.

- Standard static 518–733 RPM, 1.7 BHP max
- Medium static 690–936 RPM, 2.4 BHP max
- High static 838–1084 RPM, 3.7 BHP max

FAN PERFORMANCE (BELT DRIVE) (cont.)

Table 28 – 50HC11**

3 PHASE

10 TON VERTICAL SUPPLY

CFM	Available External Static Pressure (in. wg)									
	0.2		0.4		0.6		0.8		1.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
3000	556	0.65	623	0.80	684	0.95	738	1.11	789	1.26
3250	590	0.79	655	0.96	713	1.13	766	1.29	815	1.46
3500	625	0.96	687	1.14	742	1.32	794	1.50	841	1.68
3750	661	1.16	719	1.35	773	1.54	822	1.73	869	1.93
4000	697	1.37	753	1.58	804	1.79	852	1.99	897	2.20
4250	733	1.62	787	1.84	836	2.06	883	2.28	926	2.49
4500	770	1.89	821	2.13	869	2.36	914	2.59	956	2.82
4750	807	2.20	856	2.45	902	2.69	945	2.94	986	3.18
5000	844	2.54	891	2.80	936	3.06	978	3.31	1018	3.57

CFM	Available External Static Pressure (in. wg)									
	1.2		1.4		1.6		1.8		2.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
3000	836	1.42	881	1.57	923	1.73	963	1.89	1001	2.05
3250	861	1.63	904	1.79	945	1.96	985	2.13	1023	2.30
3500	886	1.86	929	2.04	969	2.22	1008	2.40	1045	2.58
3750	912	2.12	954	2.31	994	2.50	1031	2.70	1068	2.89
4000	940	2.40	980	2.61	1019	2.81	1056	3.02	1092	3.22
4250	968	2.71	1007	2.93	1045	3.15	1081	3.36	1117	3.58
4500	996	3.05	1035	3.28	1072	3.51	1108	3.74	1142	3.97
4750	1026	3.42	1063	3.66	1100	3.91	1135	4.15	1168	4.39
5000	1056	3.82	1093	4.08	1128	4.34	1162	4.59	-	-

NOTE: For more information, see General Fan Performance Notes.

- Standard static 591 – 838 RPM, 2.4 BHP max
- Medium static 838 – 1084 RPM, 3.7 BHP max
- High static 1022 – 1240 RPM, 4.9 BHP max

Table 29 – 50HC11**

3 PHASE

10 TON HORIZONTAL SUPPLY

CFM	Available External Static Pressure (in. wg)									
	0.2		0.4		0.6		0.8		1.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
3000	523	0.58	592	0.73	657	0.88	718	1.05	775	1.22
3250	555	0.71	620	0.87	681	1.04	739	1.21	794	1.39
3500	588	0.86	649	1.03	707	1.21	762	1.39	815	1.58
3750	621	1.03	679	1.21	734	1.40	786	1.59	837	1.79
4000	655	1.23	709	1.42	761	1.61	812	1.82	860	2.03
4250	689	1.45	741	1.65	790	1.86	838	2.07	885	2.29
4500	723	1.69	773	1.90	820	2.12	866	2.35	910	2.57
4750	758	1.96	805	2.19	850	2.42	894	2.65	937	2.89
5000	793	2.26	838	2.50	881	2.74	923	2.98	965	3.23

CFM	Available External Static Pressure (in. wg)									
	1.2		1.4		1.6		1.8		2.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
3000	830	1.39	883	1.57	934	1.76	982	1.95	1029	2.14
3250	847	1.57	897	1.76	946	1.96	993	2.16	1039	2.36
3500	865	1.77	914	1.97	961	2.18	1007	2.38	1051	2.60
3750	885	1.99	932	2.20	978	2.42	1022	2.64	1065	2.86
4000	907	2.24	952	2.46	996	2.68	1038	2.91	1080	3.14
4250	930	2.51	973	2.74	1015	2.97	1057	3.21	1097	3.45
4500	954	2.81	996	3.05	1037	3.29	1076	3.54	1115	3.79
4750	979	3.13	1019	3.38	1059	3.63	1097	3.89	1135	4.15
5000	1005	3.49	1044	3.74	1082	4.01	1119	4.27	1156	4.55

NOTE: For more information, see General Fan Performance Notes.

- Standard static 591 – 838 RPM, 2.4 BHP max
- Medium static 838 – 1084 RPM, 3.7 BHP max
- High static 1022 – 1240 RPM, 4.9 BHP max

FAN PERFORMANCE (BELT DRIVE) (cont.)

Table 30 – 50HC12**

3 PHASE

10 TON VERTICAL SUPPLY

CFM	Available External Static Pressure (in. wg)									
	0.2		0.4		0.6		0.8		1.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
3000	556	0.65	623	0.80	684	0.95	738	1.11	789	1.26
3250	590	0.79	655	0.96	713	1.13	766	1.29	815	1.46
3500	625	0.96	687	1.14	742	1.32	794	1.50	841	1.68
3750	661	1.16	719	1.35	773	1.54	822	1.73	869	1.93
4000	697	1.37	753	1.58	804	1.79	852	1.99	897	2.20
4250	733	1.62	787	1.84	836	2.06	883	2.28	926	2.49
4500	770	1.89	821	2.13	869	2.36	914	2.59	956	2.82
4750	807	2.20	856	2.45	902	2.69	945	2.94	986	3.18
5000	844	2.54	891	2.80	936	3.06	978	3.31	1018	3.57

CFM	Available External Static Pressure (in. wg)									
	1.2		1.4		1.6		1.8		2.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
3000	836	1.42	881	1.57	923	1.73	963	1.89	1001	2.05
3250	861	1.63	904	1.79	945	1.96	985	2.13	1023	2.30
3500	886	1.86	929	2.04	969	2.22	1008	2.40	1045	2.58
3750	912	2.12	954	2.31	994	2.50	1031	2.70	1068	2.89
4000	940	2.40	980	2.61	1019	2.81	1056	3.02	1092	3.22
4250	968	2.71	1007	2.93	1045	3.15	1081	3.36	1117	3.58
4500	996	3.05	1035	3.28	1072	3.51	1108	3.74	1142	3.97
4750	1026	3.42	1063	3.66	1100	3.91	1135	4.15	1168	4.39
5000	1056	3.82	1093	4.08	1128	4.34	1162	4.59	-	-

NOTE: For more information, see General Fan Performance Notes.

- Standard static 591 – 838 RPM, 2.4 BHP max
- Medium static 838 – 1084 RPM, 3.7 BHP max
- High static 1022 – 1240 RPM, 4.9 BHP max

Table 31 – 50HC12**

3 PHASE

10 TON HORIZONTAL SUPPLY

CFM	Available External Static Pressure (in. wg)									
	0.2		0.4		0.6		0.8		1.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
3000	523	0.58	592	0.73	657	0.88	718	1.05	775	1.22
3250	555	0.71	620	0.87	681	1.04	739	1.21	794	1.39
3500	588	0.86	649	1.03	707	1.21	762	1.39	815	1.58
3750	621	1.03	679	1.21	734	1.40	786	1.59	837	1.79
4000	655	1.23	709	1.42	761	1.61	812	1.82	860	2.03
4250	689	1.45	741	1.65	790	1.86	838	2.07	885	2.29
4500	723	1.69	773	1.90	820	2.12	866	2.35	910	2.57
4750	758	1.96	805	2.19	850	2.42	894	2.65	937	2.89
5000	793	2.26	838	2.50	881	2.74	923	2.98	965	3.23

CFM	Available External Static Pressure (in. wg)									
	1.2		1.4		1.6		1.8		2.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
3000	830	1.39	883	1.57	934	1.76	982	1.95	1029	2.14
3250	847	1.57	897	1.76	946	1.96	993	2.16	1039	2.36
3500	865	1.77	914	1.97	961	2.18	1007	2.38	1051	2.60
3750	885	1.99	932	2.20	978	2.42	1022	2.64	1065	2.86
4000	907	2.24	952	2.46	996	2.68	1038	2.91	1080	3.14
4250	930	2.51	973	2.74	1015	2.97	1057	3.21	1097	3.45
4500	954	2.81	996	3.05	1037	3.29	1076	3.54	1115	3.79
4750	979	3.13	1019	3.38	1059	3.63	1097	3.89	1135	4.15
5000	1005	3.49	1044	3.74	1082	4.01	1119	4.27	1156	4.55

NOTE: For more information, see General Fan Performance Notes.

- Standard static 591 – 838 RPM, 2.4 BHP max
- Medium static 838 – 1084 RPM, 3.7 BHP max
- High static 1022 – 1240 RPM, 4.9 BHP max

FAN PERFORMANCE (BELT DRIVE) (cont.)

Table 32 – 50HC14**

3 PHASE

12.5 TON VERTICAL SUPPLY

CFM	Available External Static Pressure (in. wg)									
	0.2		0.4		0.6		0.8		1.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
3438	383	0.46	458	0.66	530	0.91	601	1.20	668	1.53
3750	402	0.56	474	0.77	540	1.01	605	1.30	670	1.64
4063	422	0.67	491	0.90	552	1.14	613	1.43	674	1.76
4375	443	0.79	508	1.04	567	1.29	623	1.58	680	1.90
4688	464	0.93	527	1.19	583	1.46	636	1.75	689	2.07
5000	486	1.10	546	1.37	600	1.65	651	1.95	700	2.27
5313	509	1.28	565	1.56	618	1.86	666	2.17	713	2.49
5625	533	1.48	585	1.77	636	2.09	683	2.41	728	2.74
5938	557	1.71	605	2.01	655	2.34	701	2.67	744	3.02
6250	581	1.97	626	2.26	673	2.61	718	2.96	760	3.32

CFM	Available External Static Pressure (in. wg)									
	1.2		1.4		1.6		1.8		2.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
3438	729	1.88	783	2.25	833	2.62	879	2.99	921	3.37
3750	731	2.00	787	2.39	838	2.78	885	3.18	929	3.59
4063	733	2.13	789	2.52	841	2.94	890	3.36	935	3.79
4375	736	2.27	791	2.67	843	3.10	892	3.54	938	3.99
4688	741	2.43	794	2.83	845	3.26	894	3.72	941	4.19
5000	749	2.63	799	3.02	848	3.45	896	3.90	942	4.39
5313	760	2.85	806	3.23	853	3.66	899	4.11	944	4.60
5625	772	3.10	816	3.48	860	3.90	904	4.35	947	4.83
5938	786	3.38	827	3.76	869	4.18	911	4.62	952	5.09
6250	801	3.69	841	4.07	880	4.49	920	4.93	959	5.40

NOTE: For more information, see General Fan Performance Notes.

- Standard static 440–609 RPM, 2.9 BHP max
- Medium static 609–778 RPM, 3.7 BHP max
- High static 776–955 RPM, 6.1 BHP max

Table 33 – 50HC14**

3 PHASE

12.5 TON HORIZONTAL SUPPLY

CFM	Available External Static Pressure (in. wg)									
	0.2		0.4		0.6		0.8		1.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
3438	379	0.48	455	0.69	526	0.94	593	1.23	655	1.54
3750	399	0.59	469	0.80	536	1.06	600	1.35	660	1.67
4063	420	0.71	486	0.93	549	1.19	609	1.49	667	1.81
4375	442	0.84	503	1.08	562	1.35	620	1.65	675	1.97
4688	464	1.00	522	1.25	578	1.52	632	1.83	685	2.16
5000	486	1.17	541	1.44	594	1.72	646	2.03	696	2.37
5313	509	1.37	561	1.64	612	1.94	661	2.26	708	2.60
5625	532	1.58	582	1.87	630	2.18	677	2.51	722	2.86
5938	555	1.82	603	2.13	649	2.45	694	2.78	737	3.14
6250	578	2.09	625	2.41	669	2.74	711	3.09	753	3.45

CFM	Available External Static Pressure (in. wg)									
	1.2		1.4		1.6		1.8		2.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
3438	713	1.89	766	2.25	816	2.64	863	3.04	907	3.46
3750	717	2.02	770	2.39	820	2.79	867	3.20	911	3.63
4063	722	2.17	774	2.55	824	2.95	870	3.37	914	3.81
4375	728	2.33	779	2.72	828	3.13	874	3.56	918	4.00
4688	736	2.52	785	2.91	832	3.32	878	3.76	922	4.21
5000	745	2.73	792	3.12	838	3.54	883	3.98	926	4.44
5313	755	2.97	801	3.36	846	3.78	889	4.23	931	4.69
5625	767	3.23	811	3.63	854	4.05	896	4.50	937	4.97
5938	780	3.52	822	3.92	864	4.35	904	4.80	944	5.27
6250	794	3.84	835	4.25	875	4.68	914	5.13	952	5.61

NOTE: For more information, see General Fan Performance Notes.

- Standard static 440–609 RPM, 2.9 BHP max
- Medium static 609–778 RPM, 3.7 BHP max
- High static 776–955 RPM, 6.1 BHP max

FAN PERFORMANCE (cont.) X13 MULTI SPEED/TORQUE MOTOR

Table 34 – 50HC*A04 Vertical Unit-Direct Drive

Speed (Torque) Tap	CFM	ESP	BHP
1	900	0.36	0.16
	975	0.27	0.16
	1050	0.18	0.15
	1125	0.10	0.15
	1200	0.04	0.16
	1275	–	–
	1350	–	–
	1425	–	–
1500	–	–	
2	900	0.51	0.21
	975	0.40	0.20
	1050	0.30	0.19
	1125	0.21	0.18
	1200	0.11	0.17
	1275	0.02	0.16
	1350	–	–
	1425	–	–
1500	–	–	
3	900	0.84	0.33
	975	0.72	0.32
	1050	0.60	0.31
	1125	0.49	0.29
	1200	0.38	0.28
	1275	0.28	0.26
	1350	0.17	0.25
	1425	0.07	0.24
1500	–	–	
4	900	1.06	0.41
	975	0.96	0.41
	1050	0.86	0.41
	1125	0.74	0.40
	1200	0.63	0.38
	1275	0.50	0.37
	1350	0.38	0.35
	1425	0.26	0.34
1500	0.15	0.32	
5	900	1.24	0.51
	975	1.19	0.52
	1050	1.14	0.54
	1125	1.08	0.57
	1200	1.03	0.59
	1275	0.98	0.61
	1350	0.93	0.64
	1425	0.88	0.67
1500	0.82	0.69	

Table 35 – 50HC*A04 Horizontal Unit-Direct Drive

Speed (Torque) Tap	CFM	ESP	BHP
1	900	0.47	0.21
	975	0.38	0.20
	1050	0.29	0.19
	1125	0.21	0.18
	1200	0.13	0.18
	1275	0.06	0.20
	1350	–	–
	1425	–	–
1500	–	–	
2	900	0.65	0.27
	975	0.54	0.26
	1050	0.44	0.25
	1125	0.33	0.24
	1200	0.23	0.23
	1275	0.13	0.21
	1350	0.02	0.20
	1425	–	–
1500	–	–	
3	900	0.96	0.38
	975	0.84	0.37
	1050	0.73	0.36
	1125	0.61	0.34
	1200	0.50	0.33
	1275	0.38	0.31
	1350	0.26	0.30
	1425	0.15	0.28
1500	0.04	0.26	
4	900	1.17	0.46
	975	1.08	0.46
	1050	0.98	0.46
	1125	0.87	0.45
	1200	0.75	0.44
	1275	0.63	0.42
	1350	0.51	0.40
	1425	0.39	0.39
1500	0.27	0.37	
5	900	1.35	0.52
	975	1.30	0.54
	1050	1.26	0.57
	1125	1.21	0.59
	1200	1.16	0.62
	1275	1.12	0.64
	1350	1.07	0.67
	1425	1.02	0.70
1500	0.97	0.73	

FAN PERFORMANCE (cont.) X13 MULTI SPEED/TORQUE MOTOR

Table 36 – 50HC*A05 Vertical Unit-Direct Drive

Speed (Torque) Tap	CFM	ESP	BHP
1	1200	0.57	0.31
	1300	0.44	0.29
	1400	0.30	0.27
	1500	0.16	0.25
	1600	0.03	0.25
	1700	–	–
	1800	–	–
	1900	–	–
	2000	–	–
2	1200	0.68	0.35
	1300	0.54	0.33
	1400	0.40	0.31
	1500	0.24	0.28
	1600	0.10	0.26
	1700	–	–
	1800	–	–
	1900	–	–
	2000	–	–
3	1200	1.15	0.54
	1300	1.09	0.54
	1400	1.02	0.55
	1500	0.93	0.58
	1600	0.82	0.57
	1700	0.69	0.55
	1800	0.54	0.52
	1900	0.38	0.50
	2000	0.21	0.47
4	1200	1.16	0.56
	1300	1.12	0.59
	1400	1.07	0.61
	1500	1.00	0.65
	1600	0.92	0.65
	1700	0.80	0.66
	1800	0.67	0.65
	1900	0.51	0.62
	2000	0.34	0.59
5	1200	1.16	0.59
	1300	1.11	0.63
	1400	1.00	0.67
	1500	0.88	0.67
	1600	0.96	0.75
	1700	0.91	0.75
	1800	0.86	0.83
	1900	0.80	0.87
	2000	0.74	0.91

Table 37 – 50HC*A05 Horizontal Unit-Direct Drive

Speed (Torque) Tap	CFM	ESP	BHP
1	1200	0.62	0.34
	1300	0.48	0.32
	1400	0.35	0.30
	1500	0.23	0.28
	1600	0.12	0.28
	1700	0.02	0.27
	1800	–	–
	1900	–	–
	2000	–	–
	2	1200	0.74
1300		0.60	0.37
1400		0.46	0.35
1500		0.32	0.32
1600		0.19	0.30
1700		0.07	0.27
1800		–	–
1900		–	–
2000		–	–
3		1200	1.20
	1300	1.12	0.60
	1400	1.01	0.61
	1500	0.89	0.62
	1600	0.76	0.59
	1700	0.61	0.56
	1800	0.47	0.53
	1900	0.32	0.50
	2000	0.18	0.47
	4	1200	1.24
1300		1.18	0.63
1400		1.11	0.65
1500		1.03	0.69
1600		0.93	0.69
1700		0.82	0.69
1800		0.70	0.69
1900		0.56	0.66
2000		0.41	0.63
5		1200	1.25
	1300	1.20	0.65
	1400	1.11	0.68
	1500	1.03	0.68
	1600	1.05	0.76
	1700	1.01	0.76
	1800	0.96	0.84
	1900	0.91	0.89
	2000	0.87	0.93

FAN PERFORMANCE (cont.) X13 MULTI SPEED/TORQUE MOTOR

Table 38 – 50HC*A06 Vertical Unit-Direct Drive

Speed (Torque) tap	CFM	ESP	BHP
1	1500	0.50	0.44
	1625	0.32	0.42
	1750	0.14	0.39
	1875	–	–
	2000	–	–
	2125	–	–
	2250	–	–
	2375	–	–
	2500	–	–
2	1500	0.72	0.56
	1625	0.53	0.53
	1750	0.34	0.50
	1875	0.18	0.48
	2000	–	–
	2125	–	–
	2250	–	–
	2375	–	–
	2500	–	–
3	1500	1.20	0.84
	1625	1.02	0.82
	1750	0.82	0.82
	1875	0.61	0.79
	2000	0.40	0.75
	2125	0.20	0.71
	2250	0.04	0.67
	2375	–	–
	2500	–	–
4	1500	1.31	0.92
	1625	1.17	0.92
	1750	0.99	0.95
	1875	0.80	0.94
	2000	0.59	0.90
	2125	0.37	0.86
	2250	0.17	0.83
	2375	0.00	0.79
	2500	–	–
5	1500	1.36	0.94
	1625	1.24	0.99
	1750	0.99	1.02
	1875	0.80	1.05
	2000	0.74	1.03
	2125	0.53	0.99
	2250	0.31	0.94
	2375	0.08	0.90
	2500	–	0.86

Table 39 – 50HC*A06 Horizontal Unit-Direct Drive

Speed (Torque) tap	CFM	ESP	BHP
1	1500	0.63	0.49
	1625	0.45	0.46
	1750	0.27	0.43
	1875	0.10	0.39
	2000	–	–
	2125	–	–
	2250	–	–
	2375	–	–
	2500	–	–
2	1500	0.88	0.61
	1625	0.69	0.58
	1750	0.49	0.55
	1875	0.30	0.51
	2000	0.12	0.48
	2125	–	–
	2250	–	–
	2375	–	–
	2500	–	–
3	1500	1.37	0.89
	1625	1.20	0.87
	1750	1.02	0.86
	1875	0.81	0.83
	2000	0.60	0.79
	2125	0.39	0.75
	2250	0.21	0.71
	2375	0.07	0.67
	2500	–	–
4	1500	1.48	0.95
	1625	1.35	0.95
	1750	1.20	0.99
	1875	1.03	0.99
	2000	0.83	0.96
	2125	0.63	0.93
	2250	0.42	0.89
	2375	0.22	0.84
	2500	0.05	0.78
5	1500	1.52	0.97
	1625	1.42	1.01
	1750	1.20	1.05
	1875	1.03	1.09
	2000	1.00	1.09
	2125	0.82	1.06
	2250	0.62	1.02
	2375	0.40	0.98
	2500	0.16	0.93

Table 40 – PULLEY ADJUSTMENT

UNIT		Motor/Drive Combo	Motor Pulley turns open										
			0	0.5	1	1.5	2	2.5	3	3.5	4	4.5	5
04	1 Phase	Standard Static	854	825	795	766	736	707	678	648	619	589	560
		Medium Static	1175	1135	1094	1054	1013	973	932	892	851	811	770
	3 Phase	Standard Static*	854	825	795	766	736	707	678	648	619	589	560
		Medium Static* High Static	1175 1466	1135 1423	1094 1380	1054 1337	1013 1294	973 1251	932 1207	892 1164	851 1121	811 1078	770 1035
05	1 Phase	Standard Static	854	825	795	766	736	707	678	648	619	589	560
		Medium Static	1175	1135	1094	1054	1013	973	932	892	851	811	770
	3 Phase	Standard Static*	854	825	795	766	736	707	678	648	619	589	560
		Medium Static* Medium Static High Static	1175 1303 1639	1135 1265 1596	1094 1226 1553	1054 1188 1510	1013 1150 1467	973 1112 1424	932 1073 1380	892 1035 1337	851 997 1294	811 958 1251	770 920 1208
06	1 Phase	Standard Static	1175	1135	1094	1054	1013	973	932	892	851	811	770
		Medium Static	1466	1423	1380	1337	1294	1251	1207	1164	1121	1078	1035
	3 Phase	Standard Static*	1175	1135	1094	1054	1013	973	932	892	851	811	770
		Medium Static* High Static	1466 1687	1423 1649	1380 1610	1337 1572	1294 1533	1251 1495	1207 1457	1164 1418	1121 1380	1078 1341	1035 1303
07	3 Phase	Standard Static	747	721	695	670	644	618	592	566	541	515	489
		Medium Static	949	927	906	884	863	841	819	798	776	755	733
		High Static	1102	1083	1063	1044	1025	1006	986	967	948	928	909
08	3 Phase	Standard Static	733	712	690	669	647	626	604	583	561	540	518
		Medium Static	936	911	887	862	838	813	788	764	739	715	690
		High Static	1084	1059	1035	1010	986	961	936	912	887	863	838
09	3 Phase	Standard Static	733	712	690	669	647	626	604	583	561	540	518
		Medium Static	936	911	887	862	838	813	788	764	739	715	690
		High Static	1084	1059	1035	1010	986	961	936	912	887	863	838
11	3 Phase	Standard Static	838	813	789	764	739	715	690	665	640	616	591
		Medium Static	1084	1059	1035	1010	986	961	936	912	887	863	838
		High Static	1240	1218	1196	1175	1153	1131	1109	1087	1066	1044	1022
12	3 Phase	Standard Static	838	813	789	764	739	715	690	665	640	616	591
		Medium Static	1084	1059	1035	1010	986	961	936	912	887	863	838
		High Static	1240	1218	1196	1175	1153	1131	1109	1087	1066	1044	1022
14	3 Phase	Standard Static	609	592	575	558	541	525	508	491	474	457	440
		Medium Static	778	761	744	727	710	694	677	660	643	626	609
		High Static	955	973	951	929	907	886	864	842	820	798	776

■ – Factory settings

* Humidi–Mizer models only

ELECTRICAL INFORMATION

Table 41 – 50HC04**

SINGLE STAGE COOLING WITH SINGLE SPEED INDOOR FAN MOTOR

V-Ph-Hz	VOLTAGE RANGE		COMP (ea)		OFM (ea)		IFM		
	MIN	MAX	RLA	LRA	WATTS	FLA	TYPE	EFF at Full Load	FLA
208-1-60	187	253	16.6	79	190	1.0	DD-STD	78%	7.4
					190	1.0	STD	67%	4.9
					190	1.0	MED	67%	4.9
230-1-60	187	253	16.6	79	190	1.0	DD-STD	78%	7.4
					190	1.0	STD	67%	4.9
					190	1.0	MED	67%	4.9
208-3-60	187	253	10.4	73	190	1.0	DD-STD	78%	7.4
					190	1.0	STD	75%	5.2
					190	1.0	MED	75%	5.2
					190	1.0	HIGH	87%	6.9
230-3-60	187	253	10.4	73	190	1.0	DD-STD	78%	7.4
					190	1.0	STD	75%	5.2
					190	1.0	MED	75%	5.2
					190	1.0	HIGH	87%	6.7
460-3-60	414	506	5.8	38	190	0.5	DD-STD	78%	4.0
					190	0.5	STD	75%	2.6
					190	0.5	MED	75%	2.6
					190	0.5	HIGH	87%	3.4
575-3-60	518	633	3.8	37	190	0.5	DD-STD	78%	4.0
					190	0.5	STD	73%	1.2
					190	0.5	MED	73%	1.2
					190	0.5	HIGH	78%	2.0

Table 42 – 50HC05**

SINGLE STAGE COOLING WITH SINGLE SPEED INDOOR FAN MOTOR

V-Ph-Hz	VOLTAGE RANGE		COMP (ea)		OFM (ea)		IFM		
	MIN	MAX	RLA	LRA	WATTS	FLA	TYPE	EFF at Full Load	FLA
208-1-60	187	253	21.8	117	325	1.4	DD-STD	78%	7.4
					325	1.4	STD	67%	4.9
					325	1.4	MED	67%	4.9
230-1-60	187	253	21.8	117	325	1.4	DD-STD	78%	7.4
					325	1.4	STD	67%	4.9
					325	1.4	MED	67%	4.9
208-3-60	187	253	13.7	83	325	1.4	DD-STD	78%	7.4
					325	1.4	STD	75%	5.2
					325	1.4	MED	87%	5.2
					325	1.4	HIGH	89%	8.4
230-3-60	187	253	13.7	83	325	1.4	DD-STD	78%	7.4
					325	1.4	STD	75%	5.2
					325	1.4	MED	87%	4.9
					325	1.4	HIGH	89%	8.3
460-3-60	414	506	6.2	41	325	0.9	DD-STD	78%	4.0
					325	0.9	STD	75%	2.6
					325	0.9	MED	87%	2.5
					325	0.9	HIGH	89%	4.2
575-3-60	518	633	4.8	33	325	0.9	DD-STD	78%	4.0
					325	0.9	STD	73%	1.2
					325	0.9	MED	72%	1.6
					325	0.9	HIGH	77%	2.8

ELECTRICAL INFORMATION

Table 43 – 50HC06**

SINGLE STAGE COOLING WITH SINGLE SPEED INDOOR FAN MOTOR

V-Ph-Hz	VOLTAGE RANGE		COMP (ea)		OFM (ea)		IFM		
	MIN	MAX	RLA	LRA	WATTS	FLA	TYPE	EFF at Full Load	FLA
208-1-60	187	253	25.0	134	325	1.4	DD-STD	78%	7.4
					325	1.4	STD	67%	4.9
					325	1.4	MED	76%	7.0
230-1-60	187	253	25.0	134	325	1.4	DD-STD	78%	7.4
					325	1.4	STD	67%	4.9
					325	1.4	MED	76%	7.0
208-3-60	187	253	15.9	110	325	1.4	DD-STD	78%	7.4
					325	1.4	STD	75%	5.2
					325	1.4	MED	87%	6.9
230-3-60	187	253	15.9	110	325	1.4	HIGH	89%	8.4
					325	1.4	DD-STD	78%	7.4
					325	1.4	STD	75%	5.2
460-3-60	414	506	7.0	52	325	1.4	MED	87%	6.7
					325	1.4	HIGH	89%	8.3
					325	0.9	DD-STD	78%	4.0
575-3-60	518	633	5.1	40	325	0.9	STD	75%	2.6
					325	0.9	MED	87%	3.4
					325	0.9	HIGH	89%	4.2
575-3-60	518	633	5.1	40	325	0.9	DD-STD	78%	4.0
					325	0.9	STD	73%	1.2
					325	0.9	MED	78%	2.0
575-3-60	518	633	5.1	40	325	0.9	HIGH	77%	2.8

Table 44 – 50HC07**

SINGLE STAGE COOLING WITH SINGLE SPEED INDOOR FAN MOTOR

(Units Produced On or After 02/16/2015)

V-Ph-Hz	VOLTAGE RANGE		COMP (ea)		OFM (ea)		IFM		
	MIN	MAX	RLA	LRA	WATTS	FLA	TYPE	EFF at Full Load	FLA
208-3-60	187	253	19.6	136	325	1.5	STD	87%	5.2
					325	1.5	MED	89%	8.4
					325	1.5	HIGH	83%	13.6
230-3-60	187	253	19.6	136	325	1.5	STD	87%	4.9
					325	1.5	MED	89%	8.3
					325	1.5	HIGH	83%	12.7
460-3-60	414	506	8.2	66	325	0.8	STD	87%	2.5
					325	0.8	MED	89%	4.2
					325	0.8	HIGH	83%	6.4
575-3-60	518	633	6.6	55	325	0.6	STD	72%	1.6
					325	0.6	MED	77%	2.8
					325	0.6	HIGH	81%	5.6

(Units Produced On or Prior to 02/15/2015)

V-Ph-Hz	VOLTAGE RANGE		COMP (ea)		OFM (ea)		IFM		
	MIN	MAX	RLA	LRA	WATTS	FLA	TYPE	EFF at Full Load	FLA
208-3-60	187	253	19.0	123	325	1.5	STD	87%	5.2
					325	1.5	MED	89%	8.4
					325	1.5	HIGH	83%	13.6
230-3-60	187	253	19.0	123	325	1.5	STD	87%	4.9
					325	1.5	MED	89%	8.3
					325	1.5	HIGH	83%	12.7
460-3-60	414	506	9.7	62	325	0.8	STD	87%	2.5
					325	0.8	MED	89%	4.2
					325	0.8	HIGH	83%	6.4
575-3-60	518	633	7.4	50	325	0.6	STD	72%	1.6
					325	0.6	MED	77%	2.8
					325	0.6	HIGH	81%	5.6

ELECTRICAL INFORMATION

Table 45 – 50HC08**

2-STAGE COOLING WITH SINGLE SPEED INDOOR FAN MOTOR

V-Ph-Hz	VOLTAGE RANGE		COMP (Cir 1)		COMP (Cir 2)		OFM (ea)		IFM		
	MIN	MAX	RLA	LRA	RLA	LRA	WATTS	FLA	TYPE	EFF at Full Load	FLA
208-3-60	187	253	13.6	83	13.6	83	325	1.5	STD	87%	5.2
							325	1.5	MED	87%	6.9
							325	1.5	HIGH	87%	10.6
230-3-60	187	253	13.6	83	13.6	83	325	1.5	STD	87%	4.9
							325	1.5	MED	87%	6.7
							325	1.5	HIGH	87%	10.6
460-3-60	414	506	6.1	41	6.1	41	325	0.8	STD	87%	2.5
							325	0.8	MED	87%	3.4
							325	0.8	HIGH	87%	5.3
575-3-60	518	633	4.2	33	4.2	33	325	0.6	STD	72%	1.6
							325	0.6	MED	78%	2
							325	0.6	HIGH	77%	2.8

Table 46 – 50HC09**

2-STAGE COOLING WITH SINGLE SPEED INDOOR FAN MOTOR

V-Ph-Hz	VOLTAGE RANGE		COMP (Cir 1)		COMP (Cir 2)		OFM (ea)		IFM		
	MIN	MAX	RLA	LRA	RLA	LRA	WATTS	FLA	TYPE	EFF at Full Load	FLA
208-3-60	187	253	13.7	83	13.7	83	325	1.5	STD	87%	5.2
							325	1.5	MED	87%	6.9
							325	1.5	HIGH	87%	10.6
230-3-60	187	253	13.7	83	13.7	83	325	1.5	STD	87%	4.9
							325	1.5	MED	87%	6.7
							325	1.5	HIGH	87%	10.6
460-3-60	414	506	6.2	41	6.2	41	325	0.8	STD	87%	2.5
							325	0.8	MED	87%	3.4
							325	0.8	HIGH	87%	5.3
575-3-60	518	633	4.8	33	4.8	33	325	0.6	STD	72%	1.6
							325	0.6	MED	78%	2
							325	0.6	HIGH	77%	2.8

Table 47 – 50HC11**

2-STAGE COOLING WITH SINGLE SPEED INDOOR FAN MOTOR

V-Ph-Hz	VOLTAGE RANGE		COMP (Cir 1)		COMP (Cir 2)		OFM (ea)		IFM		
	MIN	MAX	RLA	LRA	RLA	LRA	WATTS	FLA	TYPE	EFF at Full Load	FLA
208-3-60	187	253	15.9	110	15.9	110	610	7.4	STD	87%	6.9
							610	7.4	MED	87%	10.6
							610	7.4	HIGH	83%	13.6
230-3-60	187	253	15.9	110	15.9	110	610	7.4	STD	87%	6.7
							610	7.4	MED	87%	10.6
							610	7.4	HIGH	83%	12.7
460-3-60	414	506	7.0	52	7.0	52	610	3.6	STD	87%	3.4
							610	3.6	MED	87%	5.3
							610	3.6	HIGH	83%	6.4
575-3-60	518	633	5.1	40	5.1	40	610	3.6	STD	78%	2
							610	3.6	MED	77%	2.8
							610	3.6	HIGH	81%	5.6

ELECTRICAL INFORMATION

Table 48 – 50HC12**

2-STAGE COOLING WITH SINGLE SPEED INDOOR FAN MOTOR

V-Ph-Hz	VOLTAGE RANGE		COMP (Cir 1)		COMP (Cir 2)		OFM (ea)		IFM		
	MIN	MAX	RLA	LRA	RLA	LRA	WATTS	FLA	TYPE	EFF at Full Load	FLA
208-3-60	187	253	15.9	110	15.9	110	1070	6.2	STD	87%	6.9
							1070	6.2	MED	87%	10.6
							1070	6.2	HIGH	83%	13.6
230-3-60	187	253	15.9	110	15.9	110	1070	6.2	STD	87%	6.7
							1070	6.2	MED	87%	10.6
							1070	6.2	HIGH	83%	12.7
460-3-60	414	506	7.7	52	7.7	52	1070	3.1	STD	87%	3.4
							1070	3.1	MED	87%	5.3
							1070	3.1	HIGH	83%	6.4
575-3-60	518	633	5.7	39	5.7	39	1070	2.5	STD	78%	2
							1070	2.5	MED	77%	2.8
							1070	2.5	HIGH	81%	5.6

Table 49 – 50HC14**

2-STAGE COOLING WITH SINGLE SPEED INDOOR FAN MOTOR

(Units Produced On or After 02/16/2015)

V-Ph-Hz	VOLTAGE RANGE		COMP (Cir 1)		COMP (Cir 2)		OFM (ea)		IFM		
	MIN	MAX	RLA	LRA	RLA	LRA	WATTS	FLA	TYPE	EFF at Full Load	FLA
208-3-60	187	253	19.6	136	19.6	136	280	1.5	STD	89%	8.4
							280	1.5	MED	87%	10.6
							280	1.5	HIGH	90%	17
230-3-60	187	253	19.6	136	19.6	136	280	1.5	STD	89%	8.3
							280	1.5	MED	87%	10.6
							280	1.5	HIGH	90%	15
460-3-60	414	506	8.2	66	8.2	66	280	0.8	STD	89%	4.2
							280	0.8	MED	87%	5.3
							280	0.8	HIGH	90%	7.6
575-3-60	518	633	6.6	55	6.6	55	280	0.7	STD	77%	2.8
							280	0.7	MED	77%	2.8
							280	0.7	HIGH	94%	6.1

(Units Produced On or Prior to 02/15/2015)

V-Ph-Hz	VOLTAGE RANGE		COMP (Cir 1)		COMP (Cir 2)		OFM (ea)		IFM		
	MIN	MAX	RLA	LRA	RLA	LRA	WATTS	FLA	TYPE	EFF at Full Load	FLA
208-3-60	187	253	19.0	123	19.0	123	280	1.5	STD	89%	8.4
							280	1.5	MED	87%	10.6
							280	1.5	HIGH	90%	17
230-3-60	187	253	19.0	123	19.0	123	280	1.5	STD	89%	8.3
							280	1.5	MED	87%	10.6
							280	1.5	HIGH	90%	15
460-3-60	414	506	9.7	62	9.7	62	280	0.8	STD	89%	4.2
							280	0.8	MED	87%	5.3
							280	0.8	HIGH	90%	7.6
575-3-60	518	633	7.4	50	7.4	50	280	0.7	STD	77%	2.8
							280	0.7	MED	77%	2.8
							280	0.7	HIGH	94%	6.1

ELECTRICAL INFORMATION

Table 50 – 50HC08**

2-STAGE COOLING WITH 2-SPEED INDOOR FAN MOTOR

V-Ph-Hz	VOLTAGE RANGE		COMP (Cir 1)		COMP (Cir 2)		OFM (ea)		IFM		
	MIN	MAX	RLA	LRA	RLA	LRA	WATTS	FLA	TYPE	EFF at Full Load	FLA
208-3-60	187	253	13.6	83	13.6	83	325	1.5	STD	84%	5.8
							325	1.5	MED	77%	7.1
							325	1.5	HIGH	82%	10.8
230-3-60	187	253	13.6	83	13.6	83	325	1.5	STD	84%	5.6
							325	1.5	MED	77%	6.8
							325	1.5	HIGH	82%	9.8
460-3-60	414	506	6.1	41	6.1	41	325	0.8	STD	79%	2.9
							325	0.8	MED	77%	3.8
							325	0.8	HIGH	82%	4.9
575-3-60	518	633	4.2	33	4.2	33	325	0.6	STD	81%	2.8
							325	0.6	MED	80%	3.5
							325	0.6	HIGH	84%	4.5

Table 51 – 50HC09**

2-STAGE COOLING WITH 2-SPEED INDOOR FAN MOTOR

V-Ph-Hz	VOLTAGE RANGE		COMP (Cir 1)		COMP (Cir 2)		OFM (ea)		IFM		
	MIN	MAX	RLA	LRA	RLA	LRA	WATTS	FLA	TYPE	EFF at Full Load	FLA
208-3-60	187	253	13.7	83	13.7	83	325	1.5	STD	84%	5.8
							325	1.5	MED	77%	7.1
							325	1.5	HIGH	82%	10.8
230-3-60	187	253	13.7	83	13.7	83	325	1.5	STD	84%	5.6
							325	1.5	MED	77%	6.8
							325	1.5	HIGH	82%	9.8
460-3-60	414	506	6.2	41	6.2	41	325	0.8	STD	79%	2.9
							325	0.8	MED	77%	3.8
							325	0.8	HIGH	82%	4.9
575-3-60	518	633	4.8	33	4.8	33	325	0.6	STD	81%	2.8
							325	0.6	MED	80%	3.5
							325	0.6	HIGH	84%	4.5

Table 52 – 50HC11**

2-STAGE COOLING WITH 2-SPEED INDOOR FAN MOTOR

V-Ph-Hz	VOLTAGE RANGE		COMP (Cir 1)		COMP (Cir 2)		OFM (ea)		IFM		
	MIN	MAX	RLA	LRA	RLA	LRA	WATTS	FLA	TYPE	EFF at Full Load	FLA
208-3-60	187	253	15.9	110	15.9	110	610	7.4	STD	77%	7.1
							610	7.4	MED	82%	10.8
							610	7.4	HIGH	84%	13.6
230-3-60	187	253	15.9	110	15.9	110	610	7.4	STD	77%	6.8
							610	7.4	MED	82%	9.8
							610	7.4	HIGH	84%	12.7
460-3-60	414	506	7.0	52	7.0	52	610	3.6	STD	77%	3.8
							610	3.6	MED	82%	4.9
							610	3.6	HIGH	84%	6.4
575-3-60	518	633	5.1	40	5.1	40	610	3.6	STD	80%	3.5
							610	3.6	MED	84%	4.5
							610	3.6	HIGH	83%	6.2

ELECTRICAL INFORMATION

Table 53 – 50HC12**

2-STAGE COOLING WITH 2-SPEED INDOOR FAN MOTOR

V-Ph-Hz	VOLTAGE RANGE		COMP (Cir 1)		COMP (Cir 2)		OFM (ea)		IFM		
	MIN	MAX	RLA	LRA	RLA	LRA	WATTS	FLA	TYPE	EFF at Full Load	FLA
208-3-60	187	253	15.9	110	15.9	110	1070	6.2	STD	77%	7.1
							1070	6.2	MED	82%	10.8
							1070	6.2	HIGH	84%	13.6
230-3-60	187	253	15.9	110	15.9	110	1070	6.2	STD	77%	6.8
							1070	6.2	MED	82%	9.8
							1070	6.2	HIGH	84%	12.7
460-3-60	414	506	7.7	52	7.7	52	1070	3.1	STD	77%	3.8
							1070	3.1	MED	82%	4.9
							1070	3.1	HIGH	84%	6.4
575-3-60	518	633	5.7	39	5.7	39	1070	2.5	STD	80%	3.5
							1070	2.5	MED	84%	4.5
							1070	2.5	HIGH	83%	6.2

Table 54 – 50HC14**

2-STAGE COOLING WITH 2-SPEED INDOOR FAN MOTOR

(Units Produced On or After 02/16/2015)

V-Ph-Hz	VOLTAGE RANGE		COMP (Cir 1)		COMP (Cir 2)		OFM (ea)		IFM		
	MIN	MAX	RLA	LRA	RLA	LRA	WATTS	FLA	TYPE	EFF at Full Load	FLA
208-3-60	187	253	19.6	136	19.6	136	280	1.5	STD	85%	8.6
							280	1.5	MED	82%	10.8
							280	1.5	HIGH	90%	20.4
230-3-60	187	253	19.6	136	19.6	136	280	1.5	STD	85%	7.8
							280	1.5	MED	82%	9.8
							280	1.5	HIGH	90%	20.4
460-3-60	414	506	8.2	66	8.2	66	280	0.8	STD	85%	3.8
							280	0.8	MED	82%	4.9
							280	0.8	HIGH	90%	10.2
575-3-60	518	633	6.6	55	6.6	55	280	0.7	STD	84%	4.5
							280	0.7	MED	84%	4.5
							280	0.7	HIGH	94%	9

(Units Produced On or Prior to 02/15/2015)

V-Ph-Hz	VOLTAGE RANGE		COMP (Cir 1)		COMP (Cir 2)		OFM (ea)		IFM		
	MIN	MAX	RLA	LRA	RLA	LRA	WATTS	FLA	TYPE	EFF at Full Load	FLA
208-3-60	187	253	19.0	123	19.0	123	280	1.5	STD	85%	8.6
							280	1.5	MED	82%	10.8
							280	1.5	HIGH	90%	20.4
230-3-60	187	253	19.0	123	19.0	123	280	1.5	STD	85%	7.8
							280	1.5	MED	82%	9.8
							280	1.5	HIGH	90%	20.4
460-3-60	414	506	9.7	62	9.7	62	280	0.8	STD	85%	3.8
							280	0.8	MED	82%	4.9
							280	0.8	HIGH	90%	10.2
575-3-60	518	633	7.4	50	7.4	50	280	0.7	STD	84%	4.5
							280	0.7	MED	84%	4.5
							280	0.7	HIGH	94%	9

ELECTRICAL INFORMATION

Table 55 – 50HC-A04

ELECTRIC HEAT - ELECTRICAL DATA SINGLE STAGE COOLING SINGLE SPEED INDOOR FAN MOTOR

NOM. V-PH-Hz	IFM TYPE	ELECTRIC HEATER PART NUMBER CRHEATER	NOM PWR (kW)	APP PWR (kW)	SINGLE POINT KIT PART NUMBER CRSINGLE			
					NO C.O. or UNPWRD C.O.		w/PWRD C.O.	
					NO RE.	w/PE. (pwrd fr/unit)	NO RE.	w/PE. (pwrd fr/unit)
208/ 230-1-60	DD-STD	101A00	4.4	3.3/4.0	-	-	-	-
		102A00	6.5	4.9/6.0	-	-	-	-
		103B00	8.7	6.5/8.0	037	037	-	-
		104B00	10.5	7.9/9.6	040	040	-	-
		102A00,102A00	13.0	9.8/11.9	040	040	-	-
	STD	101A00	4.4	3.3/4.0	-	-	-	-
		102A00	6.5	4.9/6.0	-	-	-	-
		103B00	8.7	6.5/8.0	037	037	-	-
		104B00	10.5	7.9/9.6	040	040	-	-
MED	101A00	4.4	3.3/4.0	-	-	-	-	
	102A00	6.5	4.9/6.0	-	-	-	-	
	103B00	8.7	6.5/8.0	037	037	-	-	
	104B00	10.5	7.9/9.6	040	040	-	-	
208/ 230-3-60	DD-STD	101A00	4.4	3.3/4.0	-	-	-	-
		102A00	6.5	4.9/6.0	-	-	-	-
		103B00	8.7	6.5/8.0	-	-	-	-
		104B00	10.5	7.9/9.6	-	-	-	-
		105A00	16.0	12.0/14.7	037	037	038	038
	STD	101A00	4.4	3.3/4.0	-	-	-	-
		102A00	6.5	4.9/6.0	-	-	-	-
		103B00	8.7	6.5/8.0	-	-	-	-
		104B00	10.5	7.9/9.6	-	-	-	-
	MED	101A00	4.4	3.3/4.0	-	-	-	-
		102A00	6.5	4.9/6.0	-	-	-	-
		103B00	8.7	6.5/8.0	-	-	-	-
104B00		10.5	7.9/9.6	-	-	-	-	
HIGH	101A00	4.4	3.3/4.0	-	-	-	-	
	102A00	6.5	4.9/6.0	-	-	-	-	
	103B00	8.7	6.5/8.0	-	-	-	-	
	104B00	10.5	7.9/9.6	-	-	-	-	
	105A00	16.0	12.0/14.7	037	037	038	038	
460-3-60	DD-STD	106A00	6.0	5.5	-	-	-	-
		107A00	8.8	8.1	-	-	-	-
		108A00	11.5	10.6	-	-	-	-
		109A00	14.0	12.9	-	-	-	-
	STD	106A00	6.0	5.5	-	-	-	-
		107A00	8.8	8.1	-	-	-	-
		108A00	11.5	10.6	-	-	-	-
		109A00	14.0	12.9	-	-	-	-
	MED	106A00	6.0	5.5	-	-	-	-
		107A00	8.8	8.1	-	-	-	-
		108A00	11.5	10.6	-	-	-	-
		109A00	14.0	12.9	-	-	-	-
HIGH	106A00	6.0	5.5	-	-	-	-	
	107A00	8.8	8.1	-	-	-	-	
	108A00	11.5	10.6	-	-	-	-	
	109A00	14.0	12.9	-	-	-	-	
575-3-60	DD-STD	297A00	9.2	9.2	-	-	-	-
		298A00	13.8	13.8	-	-	-	-
	STD	297A00	9.2	9.2	-	-	-	-
		298A00	13.8	13.8	-	-	-	-
	MED	297A00	9.2	9.2	-	-	-	-
		298A00	13.8	13.8	-	-	-	-
	HIGH	297A00	9.2	9.2	-	-	-	-
		298A00	13.8	13.8	-	-	-	-

NOTE: STD and MED IFM type are belt drive for 1 phase HC w/Humidi-MiZer. HC 1 phase w/o Humidi-MiZer must use DD-STD IFM type only.

ELECTRICAL INFORMATION

Table 56 – 50HC-A05

ELECTRIC HEAT - ELECTRICAL DATA SINGLE STAGE COOLING SINGLE SPEED INDOOR FAN MOTOR

NOM. V-PH-Hz	IFM TYPE	ELECTRIC HEATER PART NUMBER CRHEATER	NOM PWR (kW)	APP PWR (kW)	SINGLE POINT KIT PART NUMBER CRSINGLE			
					NO C.O. or UNPWRD C.O.		w/PWRD C.O.	
					NO RE.	w/P.E. (pwrd fr/unit)	NO RE.	w/P.E. (pwrd fr/unit)
208/ 230-1-60	DD-STD	101A00	4.4	3.3/4.0	-	-	-	-
		103B00	8.7	6.5/8.0	037	037	-	-
		102A00,102A00	13.0	9.8/11.9	040	040	-	-
		103B00,103B00	17.4	13.1/16.0	040	040	-	-
		104B00,104B00	21.0	15.8/19.3	040	040	-	-
	STD	101A00	4.4	3.3/4.0	-	-	-	-
		103B00	8.7	6.5/8.0	037	037	-	-
		102A00,102A00	13.0	9.8/11.9	040	040	-	-
		103B00,103B00	17.4	13.1/16.0	040	040	-	-
	MED	104B00,104B00	21.0	15.8/19.3	040	040	-	-
		101A00	4.4	3.3/4.0	-	-	-	-
		103B00	8.7	6.5/8.0	037	037	-	-
102A00,102A00		13.0	9.8/11.9	040	040	-	-	
208/ 230-3-60	DD-STD	103B00,103B00	17.4	13.1/16.0	040	040	-	-
		104B00,104B00	21.0	15.8/19.3	040	040	-	-
		102A00	6.5	4.9/6.0	-	-	-	-
		103B00	8.7	6.5/8.0	-	-	-	-
	STD	105A00	16.0	12.0/14.7	037	037	038	038
		104B00,104B00	21.0	15.8/19.3	038	038	038	038
		102A00	6.5	4.9/6.0	-	-	-	-
		103B00	8.7	6.5/8.0	-	-	-	-
	MED	105A00	16.0	12.0/14.7	037	037	038	038
		104B00,104B00	21.0	15.8/19.3	038	038	038	038
		102A00	6.5	4.9/6.0	-	-	-	-
		103B00	8.7	6.5/8.0	-	-	-	-
HIGH	105A00	16.0	12.0/14.7	037	037	038	038	
	104B00,104B00	21.0	15.8/19.3	038	038	038	038	
	102A00	6.5	4.9/6.0	-	-	-	-	
	103B00	8.7	6.5/8.0	-	-	-	-	
460-3-60	DD-STD	105A00	16.0	12.0/14.7	037	037	038	038
		104B00,104B00	21.0	15.8/19.3	038	038	038	038
		106A00	6.0	5.5	-	-	-	-
		108A00	11.5	10.6	-	-	-	-
	STD	109A00	14.0	12.9	-	-	-	-
		108A00,108A00	23.0	21.1	037	037	037	037
		106A00	6.0	5.5	-	-	-	-
		108A00	11.5	10.6	-	-	-	-
	MED	109A00	14.0	12.9	-	-	-	-
		108A00,108A00	23.0	21.1	037	037	037	037
		106A00	6.0	5.5	-	-	-	-
		108A00	11.5	10.6	-	-	-	-
HIGH	109A00	14.0	12.9	-	-	-	-	
	108A00,108A00	23.0	21.1	037	037	037	037	
	106A00	6.0	5.5	-	-	-	-	
	108A00	11.5	10.6	-	-	-	-	
575-3-60	DD-STD	109A00	14.0	12.9	-	-	-	-
		108A00,108A00	23.0	21.1	037	037	037	037
	STD	106A00	6.0	5.5	-	-	-	-
		108A00	11.5	10.6	-	-	-	-
	MED	109A00	14.0	12.9	-	-	-	-
		108A00	13.8	13.8	-	-	-	-
	HIGH	109A00	9.2	9.2	-	-	-	-
		108A00	13.8	13.8	-	-	-	-

NOTE: STD and MED IFM type are belt drive for 1 phase HC w/Humidi-MiZer. HC 1 phase w/o Humidi-MiZer must use DD-STD IFM type only.

ELECTRICAL INFORMATION

Table 57 – 50HC-A06

ELECTRIC HEAT - ELECTRICAL DATA SINGLE STAGE COOLING SINGLE SPEED INDOOR FAN MOTOR

NOM. V-PH-Hz	IFM TYPE	ELECTRIC HEATER PART NUMBER CRHEATER	NOM PWR (kW)	APP PWR (kW)	SINGLE POINT KIT PART NUMBER CRSINGLE			
					NO C.O. or UNPWRD C.O.		w/PWRD C.O.	
					NO RE.	w/P.E. (pwrd fr/unit)	NO RE.	w/P.E. (pwrd fr/unit)
208/ 230-1-60	DD-STD	102A00	6.5	4.9/6.0	-	-	-	-
		103B00	8.7	6.5/8.0	037	037	-	-
		102A00,102A00	13.0	9.8/11.9	040	040	-	-
		103B00,103B00	17.4	13.1/16.0	040	040	-	-
		104B00,104B00	21.0	15.8/19.3	040	040	-	-
	STD	102A00	6.5	4.9/6.0	-	-	-	-
		103B00	8.7	6.5/8.0	037	037	-	-
		102A00,102A00	13.0	9.8/11.9	040	040	-	-
		103B00,103B00	17.4	13.1/16.0	040	040	-	-
		104B00,104B00	21.0	15.8/19.3	040	040	-	-
	MED	102A00	6.5	4.9/6.0	-	-	-	-
		103B00	8.7	6.5/8.0	037	037	-	-
102A00,102A00		13.0	9.8/11.9	040	040	-	-	
103B00,103B00		17.4	13.1/16.0	040	040	-	-	
104B00,104B00		21.0	15.8/19.3	040	040	-	-	
208/ 230-3-60	DD-STD	102A00	6.5	4.9/6.0	-	-	-	-
		104B00	10.5	7.9/9.6	-	-	-	-
		105A00	16.0	12.0/14.7	037	037	038	038
		104B00,104B00	21.0	15.8/19.3	038	038	038	038
		104B00,105A00	26.5	19.9/24.3	038	038	038	038
	STD	102A00	6.5	4.9/6.0	-	-	-	-
		104B00	10.5	7.9/9.6	-	-	-	-
		105A00	16.0	12.0/14.7	037	037	038	038
		104B00,104B00	21.0	15.8/19.3	038	038	038	038
		104B00,105A00	26.5	19.9/24.3	038	038	038	038
	MED	102A00	6.5	4.9/6.0	-	-	-	-
		104B00	10.5	7.9/9.6	-	-	-	-
		105A00	16.0	12.0/14.7	037	037	038	038
		104B00,104B00	21.0	15.8/19.3	038	038	038	038
		104B00,105A00	26.5	19.9/24.3	038	038	038	038
	HIGH	102A00	6.5	4.9/6.0	-	-	-	-
104B00		10.5	7.9/9.6	-	-	-	037	
105A00		16.0	12.0/14.7	037	038	038	038	
104B00,104B00		21.0	15.8/19.3	038	038	038	038	
104B00,105A00		26.5	19.9/24.3	038	038	038	038	
460-3-60	DD-STD	106A00	6.0	5.5	-	-	-	-
		108A00	11.5	10.6	-	-	-	-
		109A00	14.0	12.9	-	-	-	-
		108A00,108A00	23.0	21.1	037	037	037	037
		108A00,109A00	25.5	23.4	037	037	037	037
	STD	106A00	6.0	5.5	-	-	-	-
		108A00	11.5	10.6	-	-	-	-
		109A00	14.0	12.9	-	-	-	-
		108A00,108A00	23.0	21.1	037	037	037	037
		108A00,109A00	25.5	23.4	037	037	037	037
	MED	106A00	6.0	5.5	-	-	-	-
		108A00	11.5	10.6	-	-	-	-
		109A00	14.0	12.9	-	-	-	-
		108A00,108A00	23.0	21.1	037	037	037	037
		108A00,109A00	25.5	23.4	037	037	037	037
	HIGH	106A00	6.0	5.5	-	-	-	-
108A00		11.5	10.6	-	-	-	-	
109A00		14.0	12.9	-	-	-	-	
108A00,108A00		23.0	21.1	037	037	037	037	
108A00,109A00		25.5	23.4	037	037	037	037	
575-3-60	DD-STD	298A00	13.8	13.8	-	-	-	-
		301A00	23.0	23.0	037	037	037	037
	STD	298A00	13.8	13.8	-	-	-	-
		301A00	23.0	23.0	037	037	037	037
	MED	298A00	13.8	13.8	-	-	-	-
		301A00	23.0	23.0	037	037	037	037
	HIGH	298A00	13.8	13.8	-	-	-	-
		301A00	23.0	23.0	037	037	037	037

NOTE: STD and MED IFM type are belt drive for 1 phase HC w/Humidi-MiZer. HC 1 phase w/o Humidi-MiZer must use DD-STD IFM type only.

ELECTRICAL INFORMATION

Table 58 – 50HC-A04

ELECTRIC HEAT - ELECTRICAL DATA SINGLE STAGE COOLING SINGLE SPEED INDOOR FAN MOTOR W/NON-FUSED DISCONNECT

NOM. V-PH-Hz	IFM TYPE	ELECTRIC HEATER PART NUMBER CRHEATER	NOM PWR (kW)	APP PWR (kW)	SINGLE POINT KIT PART NUMBER CRSINGLE			
					NO C.O. or UNPWRD C.O.		w/PWRD C.O.	
					NO RE.	w/PE. (pwrd fr/unit)	NO RE.	w/PE. (pwrd fr/unit)
208/ 230-1-60	DD-STD	101A00	4.4	3.3/4.0	037	037	-	-
		102A00	6.5	4.9/6.0	037	037	-	-
		103B00	8.7	6.5/8.0	037	037	-	-
		104B00	10.5	7.9/9.6	040	040	-	-
		102A00,102A00	13.0	9.8/11.9	040	040	-	-
	STD	101A00	4.4	3.3/4.0	037	037	-	-
		102A00	6.5	4.9/6.0	037	037	-	-
		103B00	8.7	6.5/8.0	037	037	-	-
		104B00	10.5	7.9/9.6	040	040	-	-
		102A00,102A00	13.0	9.8/11.9	040	040	-	-
	MED	101A00	4.4	3.3/4.0	037	037	-	-
		102A00	6.5	4.9/6.0	037	037	-	-
103B00		8.7	6.5/8.0	037	037	-	-	
104B00		10.5	7.9/9.6	040	040	-	-	
102A00,102A00		13.0	9.8/11.9	040	040	-	-	
208/ 230-3-60	DD-STD	101A00	4.4	3.3/4.0	037	037	037	037
		102A00	6.5	4.9/6.0	037	037	037	037
		103B00	8.7	6.5/8.0	037	037	037	037
		104B00	10.5	7.9/9.6	037	037	037	037
		105A00	16.0	12.0/14.7	037	037	038	038
	STD	101A00	4.4	3.3/4.0	037	037	037	037
		102A00	6.5	4.9/6.0	037	037	037	037
		103B00	8.7	6.5/8.0	037	037	037	037
		104B00	10.5	7.9/9.6	037	037	037	037
		105A00	16.0	12.0/14.7	037	037	038	038
	MED	101A00	4.4	3.3/4.0	037	037	037	037
		102A00	6.5	4.9/6.0	037	037	037	037
103B00		8.7	6.5/8.0	037	037	037	037	
104B00		10.5	7.9/9.6	037	037	037	037	
105A00		16.0	12.0/14.7	037	037	038	038	
HIGH	101A00	4.4	3.3/4.0	037	037	037	037	
	102A00	6.5	4.9/6.0	037	037	037	037	
	103B00	8.7	6.5/8.0	037	037	037	037	
	104B00	10.5	7.9/9.6	037	037	037	037	
	105A00	16.0	12.0/14.7	037	037	038	038	
460-3-60	DD-STD	106A00	6.0	5.5	-	-	-	-
		107A00	8.8	8.1	-	-	-	-
		108A00	11.5	10.6	-	-	-	-
		109A00	14.0	12.9	-	-	-	-
	STD	106A00	6.0	5.5	-	-	-	-
		107A00	8.8	8.1	-	-	-	-
		108A00	11.5	10.6	-	-	-	-
		109A00	14.0	12.9	-	-	-	-
	MED	106A00	6.0	5.5	-	-	-	-
		107A00	8.8	8.1	-	-	-	-
		108A00	11.5	10.6	-	-	-	-
		109A00	14.0	12.9	-	-	-	-
HIGH	106A00	6.0	5.5	-	-	-	-	
	107A00	8.8	8.1	-	-	-	-	
	108A00	11.5	10.6	-	-	-	-	
	109A00	14.0	12.9	-	-	-	-	
575-3-60	DD-STD	297A00	9.2	9.2	-	-	-	-
		298A00	13.8	13.8	-	-	-	-
	STD	297A00	9.2	9.2	-	-	-	-
		298A00	13.8	13.8	-	-	-	-
	MED	297A00	9.2	9.2	-	-	-	-
		298A00	13.8	13.8	-	-	-	-
	HIGH	297A00	9.2	9.2	-	-	-	-
		298A00	13.8	13.8	-	-	-	-

NOTE: STD and MED IFM type are belt drive for 1 phase HC w/Humidi-MiZer. HC 1 phase w/o Humidi-MiZer must use DD-STD IFM type only.

ELECTRICAL INFORMATION

Table 59 – 50HC-A05

ELECTRIC HEAT - ELECTRICAL DATA SINGLE STAGE COOLING SINGLE SPEED INDOOR FAN MOTOR W/NON-FUSED DISCONNECT

NOM. V-PH-Hz	IFM TYPE	ELECTRIC HEATER PART NUMBER CRHEATER	NOM PWR (kW)	APP PWR (kW)	SINGLE POINT KIT PART NUMBER CRSINGLE			
					NO C.O. or UNPWRD C.O.		w/PWRD C.O.	
					NO RE.	w/PE. (pwrd fr/unit)	NO RE.	w/PE. (pwrd fr/unit)
208/ 230-1-60	DD-STD	101A00	4.4	3.3/4.0	037	037	-	-
		103B00	8.7	6.5/8.0	037	037	-	-
		102A00,102A00	13.0	9.8/11.9	040	040	-	-
		103B00,103B00	17.4	13.1/16.0	040	040	-	-
		104B00,104B00	21.0	15.8/19.3	040	040	-	-
	STD	101A00	4.4	3.3/4.0	037	037	-	-
		103B00	8.7	6.5/8.0	037	037	-	-
		102A00,102A00	13.0	9.8/11.9	040	040	-	-
		103B00,103B00	17.4	13.1/16.0	040	040	-	-
		104B00,104B00	21.0	15.8/19.3	040	040	-	-
	MED	101A00	4.4	3.3/4.0	037	037	-	-
		103B00	8.7	6.5/8.0	037	037	-	-
102A00,102A00		13.0	9.8/11.9	040	040	-	-	
103B00,103B00		17.4	13.1/16.0	040	040	-	-	
104B00,104B00		21.0	15.8/19.3	040	040	-	-	
208/ 230-3-60	DD-STD	102A00	6.5	4.9/6.0	037	037	037	037
		103B00	8.7	6.5/8.0	037	037	037	037
		105A00	16.0	12.0/14.7	037	037	038	038
		104B00,104B00	21.0	15.8/19.3	038	038	038	038
	STD	102A00	6.5	4.9/6.0	037	037	037	037
		103B00	8.7	6.5/8.0	037	037	037	037
		105A00	16.0	12.0/14.7	037	037	038	038
		104B00,104B00	21.0	15.8/19.3	038	038	038	038
	MED	102A00	6.5	4.9/6.0	037	037	037	037
		103B00	8.7	6.5/8.0	037	037	037	037
		105A00	16.0	12.0/14.7	037	037	038	038
		104B00,104B00	21.0	15.8/19.3	038	038	038	038
HIGH	102A00	6.5	4.9/6.0	037	037	037	037	
	103B00	8.7	6.5/8.0	037	037	037	037	
	105A00	16.0	12.0/14.7	037	038	038	038	
	104B00,104B00	21.0	15.8/19.3	038	038	038	038	
460-3-60	DD-STD	106A00	6.0	5.5	-	-	-	-
		108A00	11.5	10.6	-	-	-	-
		109A00	14.0	12.9	-	-	-	-
		108A00,108A00	23.0	21.1	037	037	037	037
	STD	106A00	6.0	5.5	-	-	-	-
		108A00	11.5	10.6	-	-	-	-
		109A00	14.0	12.9	-	-	-	-
		108A00,108A00	23.0	21.1	037	037	037	037
	MED	106A00	6.0	5.5	-	-	-	-
		108A00	11.5	10.6	-	-	-	-
		109A00	14.0	12.9	-	-	-	-
		108A00,108A00	23.0	21.1	037	037	037	037
HIGH	106A00	6.0	5.5	-	-	-	-	
	108A00	11.5	10.6	-	-	-	-	
	109A00	14.0	12.9	-	-	-	-	
	108A00,108A00	23.0	21.1	037	037	037	037	
575-3-60	DD-STD	297A00	9.2	9.2	-	-	-	-
		298A00	13.8	13.8	-	-	-	-
	STD	297A00	9.2	9.2	-	-	-	-
		298A00	13.8	13.8	-	-	-	-
	MED	297A00	9.2	9.2	-	-	-	-
		298A00	13.8	13.8	-	-	-	-
	HIGH	297A00	9.2	9.2	-	-	-	-
		298A00	13.8	13.8	-	-	-	-

NOTE: STD and MED IFM type are belt drive for 1 phase HC w/Humidi-MiZer. HC 1 phase w/o Humidi-MiZer must use DD-STD IFM type only.

ELECTRICAL INFORMATION

Table 60 – 50HC-A06

ELECTRIC HEAT - ELECTRICAL DATA SINGLE STAGE COOLING SINGLE SPEED INDOOR FAN MOTOR W/NON-FUSED DISCONNECT

NOM. V-PH-Hz	IFM TYPE	ELECTRIC HEATER PART NUMBER CRHEATER	NOM PWR (kW)	APP PWR (kW)	SINGLE POINT KIT PART NUMBER CRSINGLE			
					NO C.O. or UNPWRD C.O.		w/PWRD C.O.	
					NO RE.	w/P.E. (pwrd fr/unit)	NO RE.	w/P.E. (pwrd fr/unit)
208/ 230-1-60	DD-STD	102A00	6.5	4.9/6.0	037	037	-	-
		103B00	8.7	6.5/8.0	037	037	-	-
		102A00,102A00	13.0	9.8/11.9	040	040	-	-
		103B00,103B00	17.4	13.1/16.0	040	040	-	-
		104B00,104B00	21.0	15.8/19.3	040	040	-	-
	STD	102A00	6.5	4.9/6.0	037	037	-	-
		103B00	8.7	6.5/8.0	037	037	-	-
		102A00,102A00	13.0	9.8/11.9	040	040	-	-
		103B00,103B00	17.4	13.1/16.0	040	040	-	-
		104B00,104B00	21.0	15.8/19.3	040	040	-	-
	MED	102A00	6.5	4.9/6.0	037	037	-	-
		103B00	8.7	6.5/8.0	037	037	-	-
102A00,102A00		13.0	9.8/11.9	040	040	-	-	
103B00,103B00		17.4	13.1/16.0	040	040	-	-	
104B00,104B00		21.0	15.8/19.3	040	040	-	-	
208/ 230-3-60	DD-STD	102A00	6.5	4.9/6.0	037	037	037	037
		104B00	10.5	7.9/9.6	037	037	037	037
		105A00	16.0	12.0/14.7	037	037	038	038
		104B00,104B00	21.0	15.8/19.3	038	038	038	038
		104B00,105A00	26.5	19.9/24.3	038	038	038	038
	STD	102A00	6.5	4.9/6.0	037	037	037	037
		104B00	10.5	7.9/9.6	037	037	037	037
		105A00	16.0	12.0/14.7	037	037	038	038
		104B00,104B00	21.0	15.8/19.3	038	038	038	038
		104B00,105A00	26.5	19.9/24.3	038	038	038	038
	MED	102A00	6.5	4.9/6.0	037	037	037	037
		104B00	10.5	7.9/9.6	037	037	037	037
		105A00	16.0	12.0/14.7	037	037	038	038
		104B00,104B00	21.0	15.8/19.3	038	038	038	038
		104B00,105A00	26.5	19.9/24.3	038	038	038	038
	HIGH	102A00	6.5	4.9/6.0	037	037	037	037
		104B00	10.5	7.9/9.6	037	037	037	037
		105A00	16.0	12.0/14.7	037	038	038	038
104B00,104B00		21.0	15.8/19.3	038	038	038	038	
104B00,105A00		26.5	19.9/24.3	038	038	038	038	
460-3-60	DD-STD	106A00	6.0	5.5	-	-	-	-
		108A00	11.5	10.6	-	-	-	-
		109A00	14.0	12.9	-	-	-	-
		108A00,108A00	23.0	21.1	037	037	037	037
		108A00,109A00	25.5	23.4	037	037	037	037
	STD	106A00	6.0	5.5	-	-	-	-
		108A00	11.5	10.6	-	-	-	-
		109A00	14.0	12.9	-	-	-	-
		108A00,108A00	23.0	21.1	037	037	037	037
		108A00,109A00	25.5	23.4	037	037	037	037
	MED	106A00	6.0	5.5	-	-	-	-
		108A00	11.5	10.6	-	-	-	-
		109A00	14.0	12.9	-	-	-	-
		108A00,108A00	23.0	21.1	037	037	037	037
		108A00,109A00	25.5	23.4	037	037	037	037
HIGH	106A00	6.0	5.5	-	-	-	-	
	108A00	11.5	10.6	-	-	-	-	
	109A00	14.0	12.9	-	-	-	-	
	108A00,108A00	23.0	21.1	037	037	037	037	
	108A00,109A00	25.5	23.4	037	037	037	037	
575-3-60	DD-STD	298A00	13.8	13.8	-	-	-	-
		301A00	23.0	23.0	037	037	037	037
	STD	298A00	13.8	13.8	-	-	-	-
		301A00	23.0	23.0	037	037	037	037
	MED	298A00	13.8	13.8	-	-	-	-
		301A00	23.0	23.0	037	037	037	037
	HIGH	298A00	13.8	13.8	-	-	-	-
		301A00	23.0	23.0	037	037	037	037

NOTE: STD and MED IFM type are belt drive for 1 phase HC w/Humidi-MiZer. HC 1 phase w/o Humidi-MiZer must use DD-STD IFM type only.

ELECTRICAL INFORMATION

Table 61 – 50HC-A07

ELECTRIC HEAT - ELECTRICAL DATA SINGLE STAGE COOLING SINGLE SPEED INDOOR FAN MOTOR W/NON-FUSED DISCONNECT

NOM. V-PH-Hz	IFM TYPE	ELECTRIC HEATER PART NUMBER CRHEATER	NOM PWR (kW)	APP PWR (kW)	SINGLE POINT KIT PART NUMBER CRSINGLE			
					NO C.O. or UNPWRD C.O.		w/PWRD C.O.	
					NO RE.	w/PE. (pwr fr/unit)	NO RE.	w/PE. (pwr fr/unit)
208/ 230-3-60	STD	264A00	6.5	4.9/6.0	042	042	042	042
		117A00	10.4	7.8/9.6	042	042	042	042
		110A00	16.0	12.0/14.7	042	042	043	043
		117A00,117A00	21.0	15.8/19.3	043	043	043	043
		110A00,117A00	26.5	19.9/24.3	043	043	043	043
	MED	264A00	6.5	4.9/6.0	042	042	042	042
		117A00	10.4	7.8/9.6	042	042	042	042
		110A00	16.0	12.0/14.7	042	043	043	043
		117A00,117A00	21.0	15.8/19.3	043	043	043	043
		110A00,117A00	26.5	19.9/24.3	043	043	043	043
	HIGH	264A00	6.5	4.9/6.0	042	042	042	042
		117A00	10.4	7.8/9.6	042	042	042	042
110A00		16.0	12.0/14.7	043	043	043	043	
117A00,117A00		21.0	15.8/19.3	043	043	043	043	
110A00,117A00		26.5	19.9/24.3	043	043	043	043	
460-3-60	STD	265A00	6.0	5.5	042	042	042	042
		266A00	11.5	10.6	042	042	042	042
		267A00	14.0	12.9	042	042	042	042
		268A00	23.0	21.1	042	042	042	042
		269A00	25.5	23.4	042	042	042	042
	MED	265A00	6.0	5.5	042	042	042	042
		266A00	11.5	10.6	042	042	042	042
		267A00	14.0	12.9	042	042	042	042
		268A00	23.0	21.1	042	042	042	042
		269A00	25.5	23.4	042	042	042	042
	HIGH	265A00	6.0	5.5	042	042	042	042
		266A00	11.5	10.6	042	042	042	042
		267A00	14.0	12.9	042	042	042	042
		268A00	23.0	21.1	042	042	042	042
		269A00	25.5	23.4	042	042	042	042
575-3-60	STD	118A00	17.0	17.0	042	042	042	042
		299A00	25.7	25.7	042	042	042	042
	MED	118A00	17.0	17.0	042	042	042	042
		299A00	25.7	25.7	042	042	042	042
	HIGH	118A00	17.0	17.0	042	042	042	042
		299A00	25.7	25.7	042	042	042	042

ELECTRICAL INFORMATION

Table 62 – 50HC-D08

ELECTRIC HEAT - ELECTRICAL DATA 2-STAGE COOLING SINGLE SPEED INDOOR FAN MOTOR

NOM. V-PH-Hz	IFM TYPE	ELECTRIC HEATER PART NUMBER CRHEATER	NOM PWR (kW)	APP PWR (kW)	SINGLE POINT KIT PART NUMBER CRSINGLE			
					NO C.O. or UNPWRD C.O.		w/PWRD C.O.	
					NO RE.	w/PE. (pwrd fr/unit)	NO RE.	w/PE. (pwrd fr/unit)
208/ 230-3-60	STD	117A00	10.4	7.8/9.6	047	047	047	047
		110A00	16.0	12.0/14.7	047	047	049	049
		111A00	24.8	18.6/22.8	049	049	049	049
		112A00	32.0	24.0/29.4	049	049	049	049
		112A00,117A00	42.4	31.8/38.9	051	051	051	051
	MED	117A00	10.4	7.8/9.6	047	047	047	047
		110A00	16.0	12.0/14.7	047	049	049	049
		111A00	24.8	18.6/22.8	049	049	049	049
		112A00	32.0	24.0/29.4	049	049	049	049
		112A00,117A00	42.4	31.8/38.9	051	051	051	051
	HIGH	117A00	10.4	7.8/9.6	047	047	047	047
		110A00	16.0	12.0/14.7	049	049	049	049
111A00		24.8	18.6/22.8	049	049	049	049	
112A00		32.0	24.0/29.4	049	049	049	049	
112A00,117A00		42.4	31.8/38.9	051	051	051	051	
460-3-60	STD	116A00	13.9	12.8	047	047	047	047
		113A00	16.5	15.2	047	047	047	047
		114A00	27.8	25.5	047	047	047	047
		115A00	33.0	30.3	047	047	047	047
		114A00,116A00	41.7	38.3	050	050	050	050
	MED	116A00	13.9	12.8	047	047	047	047
		113A00	16.5	15.2	047	047	047	047
		114A00	27.8	25.5	047	047	047	047
		115A00	33.0	30.3	047	047	047	047
		114A00,116A00	41.7	38.3	050	050	050	050
	HIGH	116A00	13.9	12.8	047	047	047	047
		113A00	16.5	15.2	047	047	047	047
		114A00	27.8	25.5	047	047	047	047
		115A00	33.0	30.3	047	047	047	050
		114A00,116A00	41.7	38.3	050	050	050	050
575-3-60	STD	118A00	17.0	17.0	047	047	047	047
		119A00	34.0	34.0	047	047	047	050
	MED	118A00	17.0	17.0	047	047	047	047
		119A00	34.0	34.0	047	047	047	050
	HIGH	118A00	17.0	17.0	047	047	047	047
		119A00	34.0	34.0	047	047	047	050

ELECTRICAL INFORMATION

Table 63 – 50HC-D09

ELECTRIC HEAT - ELECTRICAL DATA 2-STAGE COOLING SINGLE SPEED INDOOR FAN MOTOR

NOM. V-PH-Hz	IFM TYPE	ELECTRIC HEATER PART NUMBER CRHEATER	NOM PWR (kW)	APP PWR (kW)	SINGLE POINT KIT PART NUMBER CRSINGLE			
					NO C.O. or UNPWRD C.O.		w/PWRD C.O.	
					NO RE.	w/PE. (pwrd fr/unit)	NO RE.	w/PE. (pwrd fr/unit)
208/ 230-3-60	STD	117A00	10.4	7.8/9.6	047	047	047	047
		110A00	16.0	12.0/14.7	047	047	049	049
		111A00	24.8	18.6/22.8	049	049	049	049
		112A00	32.0	24.0/29.4	049	049	049	049
		112A00,117A00	42.4	31.8/38.9	051	051	051	051
	MED	117A00	10.4	7.8/9.6	047	047	047	047
		110A00	16.0	12.0/14.7	047	049	049	049
		111A00	24.8	18.6/22.8	049	049	049	049
		112A00	32.0	24.0/29.4	049	049	049	049
		112A00,117A00	42.4	31.8/38.9	051	051	051	051
	HIGH	117A00	10.4	7.8/9.6	047	047	047	047
		110A00	16.0	12.0/14.7	049	049	049	049
111A00		24.8	18.6/22.8	049	049	049	049	
112A00		32.0	24.0/29.4	049	049	049	049	
112A00,117A00		42.4	31.8/38.9	051	051	051	051	
460-3-60	STD	116A00	13.9	12.8	047	047	047	047
		113A00	16.5	15.2	047	047	047	047
		114A00	27.8	25.5	047	047	047	047
		115A00	33.0	30.3	047	047	047	047
		114A00,116A00	41.7	38.3	050	050	050	050
	MED	116A00	13.9	12.8	047	047	047	047
		113A00	16.5	15.2	047	047	047	047
		114A00	27.8	25.5	047	047	047	047
		115A00	33.0	30.3	047	047	047	047
		114A00,116A00	41.7	38.3	050	050	050	050
	HIGH	116A00	13.9	12.8	047	047	047	047
		113A00	16.5	15.2	047	047	047	047
		114A00	27.8	25.5	047	047	047	047
		115A00	33.0	30.3	047	047	047	050
		114A00,116A00	41.7	38.3	050	050	050	050
575-3-60	STD	118A00	17.0	17.0	047	047	047	047
		119A00	34.0	34.0	047	047	047	050
	MED	118A00	17.0	17.0	047	047	047	047
		119A00	34.0	34.0	047	047	047	050
	HIGH	118A00	17.0	17.0	047	047	047	047
		119A00	34.0	34.0	047	047	047	050

ELECTRICAL INFORMATION

Table 64 – 50HC-D11

ELECTRIC HEAT - ELECTRICAL DATA 2-STAGE COOLING SINGLE SPEED INDOOR FAN MOTOR

NOM. V-PH-Hz	IFM TYPE	ELECTRIC HEATER PART NUMBER CRHEATER	NOM PWR (kW)	APP PWR (kW)	SINGLE POINT KIT PART NUMBER CRSINGLE			
					NO C.O. or UNPWRD C.O.		w/PWRD C.O.	
					NO RE.	w/PE. (pwrd fr/unit)	NO RE.	w/PE. (pwrd fr/unit)
208/ 230-3-60	STD	117A00	10.4	7.8/9.6	047	047	047	049
		110A00	16.0	12.0/14.7	047	049	049	049
		112A00	32.0	24.0/29.4	049	049	049	049
		112A00,117A00	42.4	31.8/38.9	051	051	051	051
		112A00,110A00	50.0	37.6/45.9	051	051	051	051
	MED	117A00	10.4	7.8/9.6	047	049	049	049
		110A00	16.0	12.0/14.7	049	049	049	049
		112A00	32.0	24.0/29.4	049	049	049	049
		112A00,117A00	42.4	31.8/38.9	051	051	051	051
		112A00,110A00	50.0	37.6/45.9	051	051	051	051
	HIGH	117A00	10.4	7.8/9.6	049	049	049	049
		110A00	16.0	12.0/14.7	049	049	049	049
112A00		32.0	24.0/29.4	049	049	049	049	
112A00,117A00		42.4	31.8/38.9	051	051	051	051	
112A00,110A00		50.0	37.6/45.9	051	051	051	051	
460-3-60	STD	116A00	13.9	12.8	047	047	-	-
		113A00	16.5	15.2	047	047	-	-
		115A00	33.0	30.3	047	047	-	-
		114A00,116A00	41.7	38.3	050	050	-	-
		115A00,113A00	50.0	45.9	050	050	-	-
	MED	116A00	13.9	12.8	047	047	-	-
		113A00	16.5	15.2	047	047	-	-
		115A00	33.0	30.3	047	047	-	-
		114A00,116A00	41.7	38.3	050	050	-	-
		115A00,113A00	50.0	45.9	050	050	-	-
	HIGH	116A00	13.9	12.8	047	047	-	-
		113A00	16.5	15.2	047	047	-	-
115A00		33.0	30.3	047	047	-	-	
114A00,116A00		41.7	38.3	050	050	-	-	
115A00,113A00		50.0	45.9	050	050	-	-	
575-3-60	STD	118A00	17.0	17.0	047	047	-	-
		119A00	34.0	34.0	047	047	-	-
		118A00,119A00	51.0	51.0	050	050	-	-
	MED	118A00	17.0	17.0	047	047	-	-
		119A00	34.0	34.0	047	047	-	-
		118A00,119A00	51.0	51.0	050	050	-	-
	HIGH	118A00	17.0	17.0	047	047	-	-
		119A00	34.0	34.0	047	050	-	-
		118A00,119A00	51.0	51.0	050	050	-	-

ELECTRICAL INFORMATION

Table 65 – 50HC-D12

ELECTRIC HEAT - ELECTRICAL DATA 2-STAGE COOLING SINGLE SPEED INDOOR FAN MOTOR

NOM. V-PH-Hz	IFM TYPE	ELECTRIC HEATER PART NUMBER CRHEATER	NOM PWR (kW)	APP PWR (kW)	SINGLE POINT KIT PART NUMBER CRSINGLE			
					NO C.O. or UNPWRD C.O.		w/PWRD C.O.	
					NO RE.	w/PE. (pwrd fr/unit)	NO RE.	w/PE. (pwrd fr/unit)
208/ 230-3-60	STD	117A00	10.4	7.8/9.6	047	047	047	049
		110A00	16.0	12.0/14.7	047	049	049	049
		112A00	32.0	24.0/29.4	049	049	049	049
		112A00,117A00	42.4	31.8/38.9	051	051	051	051
		112A00,110A00	50.0	37.6/45.9	051	051	051	051
	MED	117A00	10.4	7.8/9.6	047	049	049	049
		110A00	16.0	12.0/14.7	049	049	049	049
		112A00	32.0	24.0/29.4	049	049	049	049
		112A00,117A00	42.4	31.8/38.9	051	051	051	051
		112A00,110A00	50.0	37.6/45.9	051	051	051	051
	HIGH	117A00	10.4	7.8/9.6	047	049	049	049
		110A00	16.0	12.0/14.7	049	049	049	049
112A00		32.0	24.0/29.4	049	049	049	049	
112A00,117A00		42.4	31.8/38.9	051	051	051	051	
112A00,110A00		50.0	37.6/45.9	051	051	051	051	
460-3-60	STD	116A00	13.9	12.8	047	047	047	047
		113A00	16.5	15.2	047	047	047	047
		115A00	33.0	30.3	047	047	047	047
		114A00,116A00	41.7	38.3	050	050	050	050
		115A00,113A00	50.0	45.9	050	050	050	050
	MED	116A00	13.9	12.8	047	047	047	047
		113A00	16.5	15.2	047	047	047	047
		115A00	33.0	30.3	047	047	047	050
		114A00,116A00	41.7	38.3	050	050	050	050
		115A00,113A00	50.0	45.9	050	050	050	050
	HIGH	116A00	13.9	12.8	047	047	047	047
		113A00	16.5	15.2	047	047	047	047
		115A00	33.0	30.3	047	047	050	050
		114A00,116A00	41.7	38.3	050	050	050	050
		115A00,113A00	50.0	45.9	050	050	050	050
575-3-60	STD	118A00	17.0	17.0	047	047	047	047
		119A00	34.0	34.0	047	047	047	050
		118A00,119A00	51.0	51.0	050	050	050	050
	MED	118A00	17.0	17.0	047	047	047	047
		119A00	34.0	34.0	047	047	047	050
		118A00,119A00	51.0	51.0	050	050	050	050
	HIGH	118A00	17.0	17.0	047	047	047	047
		119A00	34.0	34.0	047	050	050	050
		118A00,119A00	51.0	51.0	050	050	050	050

ELECTRICAL INFORMATION

Table 66 – 50HC-D14

ELECTRIC HEAT - ELECTRICAL DATA 2-STAGE COOLING SINGLE SPEED INDOOR FAN MOTOR

NOM. V-PH-Hz	IFM TYPE	ELECTRIC HEATER PART NUMBER CRHEATER	NOM PWR (kW)	APP PWR (kW)	SINGLE POINT KIT PART NUMBER CRSINGLE			
					NO C.O. or UNPWRD C.O.		w/PWRD C.O.	
					NO RE.	w/PE. (pwrd fr/unit)	NO RE.	w/PE. (pwrd fr/unit)
208/ 230-3-60	STD	291A00	16.5	12.4/15.2	049	049	049	049
		288A00,291A00	26.5	19.9/24.3	049	049	049	049
		294A00	33.5	25.2/30.8	049	049	049	049
		288A00,294A00	43.5	32.7/40.0	051	051	051	051
		291A00,294A00	50.0	37.6/45.9	051	051	051	051
	MED	291A00	16.5	12.4/15.2	049	049	049	049
		288A00,291A00	26.5	19.9/24.3	049	049	049	049
		294A00	33.5	25.2/30.8	049	049	049	049
		288A00,294A00	43.5	32.7/40.0	051	051	051	051
		291A00,294A00	50.0	37.6/45.9	051	051	051	051
	HIGH	291A00	16.5	12.4/15.2	049	049	049	049
		288A00,291A00	26.5	19.9/24.3	049	049	049	049
294A00		33.5	25.2/30.8	049	049	049	049	
288A00,294A00		43.5	32.7/40.0	051	051	051	051	
291A00,294A00		50.0	37.6/45.9	051	051	051	051	
460-3-60	STD	292A00	16.5	15.2	-	-	-	-
		289A00,292A00	26.5	24.3	047	047	047	047
		295A00	33.5	30.8	047	047	047	050
		289A00,295A00	43.5	40.0	050	050	050	050
		292A00,295A00	50.0	45.9	050	050	050	050
	MED	292A00	16.5	15.2	-	-	-	-
		289A00,292A00	26.5	24.3	047	047	047	047
		295A00	33.5	30.8	047	047	047	050
		289A00,295A00	43.5	40.0	050	050	050	050
		292A00,295A00	50.0	45.9	050	050	050	050
	HIGH	292A00	16.5	15.2	-	-	-	-
		289A00,292A00	26.5	24.3	047	047	047	047
295A00		33.5	30.8	050	050	050	050	
289A00,295A00		43.5	40.0	050	050	050	050	
292A00,295A00		50.0	45.9	050	050	050	050	
575-3-60	STD	293A00	16.5	15.2	-	-	-	-
		290A00,293A00	26.5	24.3	047	047	047	047
		296A00	33.5	30.8	047	047	047	047
		290A00,296A00	43.5	40.0	047	050	047	050
		293A00,296A00	50.0	45.9	047	047	047	047
	MED	293A00	16.5	15.2	-	-	-	-
		290A00,293A00	26.5	24.3	047	047	047	047
		296A00	33.5	30.8	047	047	047	047
		290A00,296A00	43.5	40.0	047	050	047	050
		293A00,296A00	50.0	45.9	047	047	047	047
	HIGH	293A00	16.5	15.2	-	-	-	-
		290A00,293A00	26.5	24.3	047	047	047	047
296A00		33.5	30.8	047	047	047	047	
290A00,296A00		43.5	40.0	050	050	050	050	
293A00,296A00		50.0	45.9	050	050	050	050	

ELECTRICAL INFORMATION

Table 67 – 50HC-D08

ELECTRIC HEAT - ELECTRICAL DATA 2-STAGE COOLING 2-SPEED INDOOR FAN MOTOR

NOM. V-PH-Hz	IFM TYPE	ELECTRIC HEATER PART NUMBER CRHEATER	NOM PWR (kW)	APP PWR (kW)	SINGLE POINT KIT PART NUMBER CRSINGLE			
					NO C.O. or UNPWRD C.O.		w/PWRD C.O.	
					NO RE.	w/PE. (pwrd fr/unit)	NO RE.	w/PE. (pwrd fr/unit)
208/ 230-3-60	STD	117A00	10.4	7.8/9.6	047	047	047	047
		110A00	16.0	12.0/14.7	047	047	049	049
		111A00	24.8	18.6/22.8	049	049	049	049
		112A00	32.0	24.0/29.4	049	049	049	049
		112A00,117A00	42.4	31.8/38.9	051	051	051	051
	MED	117A00	10.4	7.8/9.6	047	047	047	047
		110A00	16.0	12.0/14.7	047	049	049	049
		111A00	24.8	18.6/22.8	049	049	049	049
		112A00	32.0	24.0/29.4	049	049	049	049
		112A00,117A00	42.4	31.8/38.9	051	051	051	051
	HIGH	117A00	10.4	7.8/9.6	047	047	047	047
		110A00	16.0	12.0/14.7	049	049	049	049
111A00		24.8	18.6/22.8	049	049	049	049	
112A00		32.0	24.0/29.4	049	049	049	049	
112A00,117A00		42.4	31.8/38.9	051	051	051	051	
460-3-60	STD	116A00	13.9	12.8	047	047	047	047
		113A00	16.5	15.2	047	047	047	047
		114A00	27.8	25.5	047	047	047	047
		115A00	33.0	30.3	047	047	047	047
		114A00,116A00	41.7	38.3	050	050	050	050
	MED	116A00	13.9	12.8	047	047	047	047
		113A00	16.5	15.2	047	047	047	047
		114A00	27.8	25.5	047	047	047	047
		115A00	33.0	30.3	047	047	047	047
		114A00,116A00	41.7	38.3	050	050	050	050
	HIGH	116A00	13.9	12.8	047	047	047	047
		113A00	16.5	15.2	047	047	047	047
		114A00	27.8	25.5	047	047	047	047
		115A00	33.0	30.3	047	047	047	050
		114A00,116A00	41.7	38.3	050	050	050	050
575-3-60	STD	118A00	17.0	17.0	047	047	047	047
		119A00	34.0	34.0	047	047	047	050
	MED	118A00	17.0	17.0	047	047	047	047
		119A00	34.0	34.0	047	050	047	050
	HIGH	118A00	17.0	17.0	047	047	047	047
		119A00	34.0	34.0	047	050	047	050

ELECTRICAL INFORMATION

Table 68 – 50HC-D09

ELECTRIC HEAT - ELECTRICAL DATA 2-STAGE COOLING 2-SPEED INDOOR FAN MOTOR

NOM. V-PH-Hz	IFM TYPE	ELECTRIC HEATER PART NUMBER CRHEATER	NOM PWR (kW)	APP PWR (kW)	SINGLE POINT KIT PART NUMBER CRSINGLE			
					NO C.O. or UNPWRD C.O.		w/PWRD C.O.	
					NO PE.	w/PE. (pwr fr/unit)	NO PE.	w/PE. (pwr fr/unit)
208/ 230-3-60	STD	117A00	10.4	7.8/9.6	047	047	047	047
		110A00	16.0	12.0/14.7	047	047	049	049
		111A00	24.8	18.6/22.8	049	049	049	049
		112A00	32.0	24.0/29.4	049	049	049	049
		112A00,117A00	42.4	31.8/38.9	051	051	051	051
	MED	117A00	10.4	7.8/9.6	047	047	047	047
		110A00	16.0	12.0/14.7	047	049	049	049
		111A00	24.8	18.6/22.8	049	049	049	049
		112A00	32.0	24.0/29.4	049	049	049	049
		112A00,117A00	42.4	31.8/38.9	051	051	051	051
	HIGH	117A00	10.4	7.8/9.6	047	047	047	047
		110A00	16.0	12.0/14.7	049	049	049	049
111A00		24.8	18.6/22.8	049	049	049	049	
112A00		32.0	24.0/29.4	049	049	049	049	
112A00,117A00		42.4	31.8/38.9	051	051	051	051	
460-3-60	STD	116A00	13.9	12.8	047	047	047	047
		113A00	16.5	15.2	047	047	047	047
		114A00	27.8	25.5	047	047	047	047
		115A00	33.0	30.3	047	047	047	047
		114A00,116A00	41.7	38.3	050	050	050	050
	MED	116A00	13.9	12.8	047	047	047	047
		113A00	16.5	15.2	047	047	047	047
		114A00	27.8	25.5	047	047	047	047
		115A00	33.0	30.3	047	047	047	047
		114A00,116A00	41.7	38.3	050	050	050	050
	HIGH	116A00	13.9	12.8	047	047	047	047
		113A00	16.5	15.2	047	047	047	047
		114A00	27.8	25.5	047	047	047	047
		115A00	33.0	30.3	047	047	047	050
		114A00,116A00	41.7	38.3	050	050	050	050
575-3-60	STD	118A00	17.0	17.0	047	047	047	047
		119A00	34.0	34.0	047	047	047	050
	MED	118A00	17.0	17.0	047	047	047	047
		119A00	34.0	34.0	047	050	047	050
	HIGH	118A00	17.0	17.0	047	047	047	047
		119A00	34.0	34.0	047	050	047	050

ELECTRICAL INFORMATION

Table 69 – 50HC-D11

ELECTRIC HEAT - ELECTRICAL DATA 2-STAGE COOLING 2-SPEED INDOOR FAN MOTOR

NOM. V-PH-Hz	IFM TYPE	ELECTRIC HEATER PART NUMBER CRHEATER	NOM PWR (kW)	APP PWR (kW)	SINGLE POINT KIT PART NUMBER CRSINGLE			
					NO C.O. or UNPWRD C.O.		w/PWRD C.O.	
					NO RE.	w/PE. (pwrd fr/unit)	NO RE.	w/PE. (pwrd fr/unit)
208/ 230-3-60	STD	117A00	10.4	7.8/9.6	047	047	047	049
		110A00	16.0	12.0/14.7	047	049	049	049
		112A00	32.0	24.0/29.4	049	049	049	049
		112A00,117A00	42.4	31.8/38.9	051	051	051	051
		112A00,110A00	50.0	37.6/45.9	051	051	051	051
	MED	117A00	10.4	7.8/9.6	047	049	049	049
		110A00	16.0	12.0/14.7	049	049	049	049
		112A00	32.0	24.0/29.4	049	049	049	049
		112A00,117A00	42.4	31.8/38.9	051	051	051	051
		112A00,110A00	50.0	37.6/45.9	051	051	051	051
	HIGH	117A00	10.4	7.8/9.6	049	049	049	049
		110A00	16.0	12.0/14.7	049	049	049	049
112A00		32.0	24.0/29.4	049	049	049	049	
112A00,117A00		42.4	31.8/38.9	051	051	051	051	
112A00,110A00		50.0	37.6/45.9	051	051	051	051	
460-3-60	STD	116A00	13.9	12.8	047	047	-	-
		113A00	16.5	15.2	047	047	-	-
		115A00	33.0	30.3	047	047	-	-
		114A00,116A00	41.7	38.3	050	050	-	-
		115A00,113A00	50.0	45.9	050	050	-	-
	MED	116A00	13.9	12.8	047	047	-	-
		113A00	16.5	15.2	047	047	-	-
		115A00	33.0	30.3	047	047	-	-
		114A00,116A00	41.7	38.3	050	050	-	-
		115A00,113A00	50.0	45.9	050	050	-	-
	HIGH	116A00	13.9	12.8	047	047	-	-
		113A00	16.5	15.2	047	047	-	-
115A00		33.0	30.3	047	047	-	-	
114A00,116A00		41.7	38.3	050	050	-	-	
115A00,113A00		50.0	45.9	050	050	-	-	
575-3-60	STD	118A00	17.0	17.0	047	047	-	-
		119A00	34.0	34.0	047	050	-	-
		118A00,119A00	51.0	51.0	050	050	-	-
	MED	118A00	17.0	17.0	047	047	-	-
		119A00	34.0	34.0	047	050	-	-
		118A00,119A00	51.0	51.0	050	050	-	-
	HIGH	118A00	17.0	17.0	047	047	-	-
		119A00	34.0	34.0	047	050	-	-
		118A00,119A00	51.0	51.0	050	050	-	-

ELECTRICAL INFORMATION

Table 70 – 50HC-D12

ELECTRIC HEAT - ELECTRICAL DATA 2-STAGE COOLING 2-SPEED INDOOR FAN MOTOR

NOM. V-PH-Hz	IFM TYPE	ELECTRIC HEATER PART NUMBER CRHEATER	NOM PWR (kW)	APP PWR (kW)	SINGLE POINT KIT PART NUMBER CRSINGLE			
					NO C.O. or UNPWRD C.O.		w/PWRD C.O.	
					NO RE.	w/PE. (pwrd fr/unit)	NO RE.	w/PE. (pwrd fr/unit)
208/ 230-3-60	STD	117A00	10.4	7.8/9.6	047	047	047	049
		110A00	16.0	12.0/14.7	047	049	049	049
		112A00	32.0	24.0/29.4	049	049	049	049
		112A00,117A00	42.4	31.8/38.9	051	051	051	051
		112A00,110A00	50.0	37.6/45.9	051	051	051	051
	MED	117A00	10.4	7.8/9.6	047	049	049	049
		110A00	16.0	12.0/14.7	049	049	049	049
		112A00	32.0	24.0/29.4	049	049	049	049
		112A00,117A00	42.4	31.8/38.9	051	051	051	051
		112A00,110A00	50.0	37.6/45.9	051	051	051	051
	HIGH	117A00	10.4	7.8/9.6	047	049	049	049
		110A00	16.0	12.0/14.7	049	049	049	049
112A00		32.0	24.0/29.4	049	049	049	049	
112A00,117A00		42.4	31.8/38.9	051	051	051	051	
112A00,110A00		50.0	37.6/45.9	051	051	051	051	
460-3-60	STD	116A00	13.9	12.8	047	047	047	047
		113A00	16.5	15.2	047	047	047	047
		115A00	33.0	30.3	047	047	047	047
		114A00,116A00	41.7	38.3	050	050	050	050
		115A00,113A00	50.0	45.9	050	050	050	050
	MED	116A00	13.9	12.8	047	047	047	047
		113A00	16.5	15.2	047	047	047	047
		115A00	33.0	30.3	047	047	047	050
		114A00,116A00	41.7	38.3	050	050	050	050
		115A00,113A00	50.0	45.9	050	050	050	050
	HIGH	116A00	13.9	12.8	047	047	047	047
		113A00	16.5	15.2	047	047	047	047
115A00		33.0	30.3	047	047	050	050	
114A00,116A00		41.7	38.3	050	050	050	050	
115A00,113A00		50.0	45.9	050	050	050	050	
575-3-60	STD	118A00	17.0	17.0	047	047	047	047
		119A00	34.0	34.0	047	050	047	050
		118A00,119A00	51.0	51.0	050	050	050	050
	MED	118A00	17.0	17.0	047	047	047	047
		119A00	34.0	34.0	047	050	047	050
		118A00,119A00	51.0	51.0	050	050	050	050
	HIGH	118A00	17.0	17.0	047	047	047	047
		119A00	34.0	34.0	047	050	050	050
		118A00,119A00	51.0	51.0	050	050	050	050

ELECTRICAL INFORMATION

Table 71 – 50HC-D14

ELECTRIC HEAT - ELECTRICAL DATA 2-STAGE COOLING 2-SPEED INDOOR FAN MOTOR

NOM. V-PH-Hz	IFM TYPE	ELECTRIC HEATER PART NUMBER CRHEATER	NOM PWR (kW)	APP PWR (kW)	SINGLE POINT KIT PART NUMBER CRSINGLE			
					NO C.O. or UNPWRD C.O.		w/PWRD C.O.	
					NO RE.	w/PE. (pwrd fr/unit)	NO RE.	w/PE. (pwrd fr/unit)
208/ 230-3-60	STD	291A00	16.5	12.4/15.2	049	049	049	049
		288A00,291A00	26.5	19.9/24.3	049	049	049	049
		294A00	33.5	25.2/30.8	049	049	049	049
		288A00,294A00	43.5	32.7/40.0	051	051	051	051
		291A00,294A00	50.0	37.6/45.9	051	051	051	051
	MED	291A00	16.5	12.4/15.2	049	049	049	049
		288A00,291A00	26.5	19.9/24.3	049	049	049	049
		294A00	33.5	25.2/30.8	049	049	049	049
		288A00,294A00	43.5	32.7/40.0	051	051	051	051
		291A00,294A00	50.0	37.6/45.9	051	051	051	051
	HIGH	291A00	16.5	12.4/15.2	049	049	049	049
		288A00,291A00	26.5	19.9/24.3	049	049	049	049
294A00		33.5	25.2/30.8	049	049	049	049	
288A00,294A00		43.5	32.7/40.0	051	051	051	051	
291A00,294A00		50.0	37.6/45.9	051	051	051	051	
460-3-60	STD	292A00	16.5	15.2	-	-	-	-
		289A00,292A00	26.5	24.3	047	047	047	047
		295A00	33.5	30.8	047	047	047	050
		289A00,295A00	43.5	40.0	050	050	050	050
		292A00,295A00	50.0	45.9	050	050	050	050
	MED	292A00	16.5	15.2	-	-	-	-
		289A00,292A00	26.5	24.3	047	047	047	047
		295A00	33.5	30.8	047	047	047	050
		289A00,295A00	43.5	40.0	050	050	050	050
		292A00,295A00	50.0	45.9	050	050	050	050
	HIGH	292A00	16.5	15.2	-	-	-	-
		289A00,292A00	26.5	24.3	047	047	047	047
295A00		33.5	30.8	050	050	050	050	
289A00,295A00		43.5	40.0	050	050	050	050	
292A00,295A00		50.0	45.9	050	050	050	050	
575-3-60	STD	293A00	16.5	15.2	-	-	-	-
		290A00,293A00	26.5	24.3	047	047	047	047
		296A00	33.5	30.8	047	047	047	047
		290A00,296A00	43.5	40.0	047	050	047	050
		293A00,296A00	50.0	45.9	047	047	047	050
	MED	293A00	16.5	15.2	-	-	-	-
		290A00,293A00	26.5	24.3	047	047	047	047
		296A00	33.5	30.8	047	047	047	047
		290A00,296A00	43.5	40.0	047	050	047	050
		293A00,296A00	50.0	45.9	047	047	047	050
	HIGH	293A00	16.5	15.2	-	-	-	-
		290A00,293A00	26.5	24.3	047	047	047	047
296A00		33.5	30.8	047	047	047	047	
290A00,296A00		43.5	40.0	050	050	050	050	
293A00,296A00		50.0	45.9	050	050	050	050	

ELECTRICAL INFORMATION

Table 72 – UNIT WIRE/FUSE OR HACR BREAKER SIZING DATA WITH SINGLE SPEED INDOOR FAN MOTOR

UNIT	NO C.O. or UNPWR C.O.					w/ PWRD C.O.													
	IFM TYPE	ELEC. HTR		NO PE.			NO PE.			w/ PE. (pwrdr fr/unit)									
		CRHEATER***A00	Nom (kW)	FLA	MCA	MAX FUSE or HACR BRKR	DISC. SIZE		MCA	MAX FUSE or HACR BRKR	DISC. SIZE	MCA	MAX FUSE or HACR BRKR	DISC. SIZE					
							FLA	LRA							FLA	LRA	FLA	LRA	
NOM. V-PH-HZ																			
50HC*A04	DD-STD	NONE	-	-	27	40	29	88	32	45	31	90	-	-	-	-	-		
		101A	3.3/4.4	15.9/18.3	30/33	30/33	45/45	29/30	88/88	32/35	45/45	31/32	90/90	-	-	-	-	-	
		102A	4.9/6.5	23.5/27.1	39/44	36/40	45/45	36/40	88/88	41/46	45/50	38/42	90/90	-	-	-	-	-	
		103B	6.5/8.7	31.4/36.3	49/55	50/60	50/60	45/50	88/88	51/57	60/60	47/52	90/90	-	-	-	-	-	
		104B	7.9/10.5	37.9/43.8	57/64	60/70	52/59	52/59	88/88	60/70	54/61	54/61	90/90	-	-	-	-	-	-
		102A+102A	9.8/13.0	46.9/54.2	68/77	70/80	62/71	62/71	88/88	71/80	80/80	65/73	90/90	-	-	-	-	-	-
		NONE	-	-	27	40	26	93	29	45	28	95	-	-	-	-	-	-	-
		101A	3.3/4.4	15.9/18.3	27/29	40/40	26/27	93/93	29/32	45/45	28/29	95/95	-	-	-	-	-	-	-
		102A	4.9/6.5	23.5/27.1	36/40	40/45	33/37	93/93	38/43	45/45	35/39	95/95	-	-	-	-	-	-	-
		103B	6.5/8.7	31.4/36.3	46/52	50/60	42/47	93/93	48/54	50/60	44/50	95/95	-	-	-	-	-	-	-
		104B	7.9/10.5	37.9/43.8	54/61	60/70	49/56	93/93	56/64	60/70	51/58	95/95	-	-	-	-	-	-	-
		102A+102A	9.8/13.0	46.9/54.2	65/74	70/80	60/68	93/93	68/77	70/80	62/70	95/95	-	-	-	-	-	-	-
50HC*A04	DD-STD	NONE	-	-	27	40	26	82	29	30	24	84	-	-	-	-	-	-	
		101A	3.3/4.4	15.9/18.3	27/29	40/40	26/27	93/93	29/32	45/45	28/29	95/95	-	-	-	-	-	-	-
		102A	4.9/6.5	23.5/27.1	36/40	40/45	33/37	93/93	38/43	45/45	35/39	95/95	-	-	-	-	-	-	-
		103B	6.5/8.7	31.4/36.3	46/52	50/60	42/47	93/93	48/54	50/60	44/50	95/95	-	-	-	-	-	-	-
		104B	7.9/10.5	37.9/43.8	54/61	60/70	49/56	93/93	56/64	60/70	51/58	95/95	-	-	-	-	-	-	-
		102A+102A	9.8/13.0	46.9/54.2	65/74	70/80	60/68	93/93	68/77	70/80	62/70	95/95	-	-	-	-	-	-	-
		NONE	-	-	22	30	22	82	24	30	24	84	-	-	-	-	-	-	-
		101A	3.3/4.4	9.2/10.6	22/23	30/30	22/22	82/82	24/25	30/30	24/24	84/84	-	-	-	-	-	-	-
		102A	4.9/6.5	13.6/15.6	27/29	30/30	24/26	82/82	29/32	30/35	26/29	84/84	-	-	-	-	-	-	-
		103B	6.5/8.7	18.1/20.9	32/36	35/40	29/33	82/82	35/38	35/40	32/35	84/84	-	-	-	-	-	-	-
		104B	7.9/10.5	21.9/25.3	37/41	40/45	34/38	82/82	39/44	40/45	36/40	84/84	-	-	-	-	-	-	-
		105A	12.0/16.0	33.4/38.5	51/58	60/60	47/53	82/82	54/60	60/60	49/55	84/84	-	-	-	-	-	-	-
50HC*A04	DD-STD	NONE	-	-	20	25	19	94	22	30	21	96	-	-	-	-	-	-	
		101A	3.3/4.4	9.2/10.6	20/20	25/25	19/19	94/94	22/23	30/30	21/21	96/96	-	-	-	-	-	-	-
		102A	4.9/6.5	13.6/15.6	24/26	25/30	22/24	94/94	26/29	30/30	24/26	96/96	-	-	-	-	-	-	-
		103B	6.5/8.7	18.1/20.9	30/33	30/35	27/30	94/94	32/35	35/40	29/32	96/96	-	-	-	-	-	-	-
		104B	7.9/10.5	21.9/25.3	34/39	35/40	31/35	94/94	37/41	40/45	33/37	96/96	-	-	-	-	-	-	-
		105A	12.0/16.0	33.4/38.5	49/55	50/60	44/50	94/94	51/57	60/60	47/52	96/96	-	-	-	-	-	-	-
		NONE	-	-	20	25	19	94	22	30	21	96	-	-	-	-	-	-	-
		101A	3.3/4.4	9.2/10.6	20/20	25/25	19/19	94/94	22/23	30/30	21/21	96/96	-	-	-	-	-	-	-
		102A	4.9/6.5	13.6/15.6	24/26	25/30	22/24	94/94	26/29	30/30	24/26	96/96	-	-	-	-	-	-	-
		103B	6.5/8.7	18.1/20.9	30/33	30/35	27/30	94/94	32/35	35/40	29/32	96/96	-	-	-	-	-	-	-
		104B	7.9/10.5	21.9/25.3	34/39	35/40	31/35	94/94	37/41	40/45	33/37	96/96	-	-	-	-	-	-	-
		105A	12.0/16.0	33.4/38.5	49/55	50/60	44/50	94/94	51/57	60/60	47/52	96/96	-	-	-	-	-	-	-
50HC*A04	MED	NONE	-	-	20	25	19	94	22	30	21	96	-	-	-	-	-	-	
		101A	3.3/4.4	9.2/10.6	20/20	25/25	19/19	94/94	22/23	30/30	21/21	96/96	-	-	-	-	-	-	-
		102A	4.9/6.5	13.6/15.6	24/26	25/30	22/24	94/94	26/29	30/30	24/26	96/96	-	-	-	-	-	-	-
		103B	6.5/8.7	18.1/20.9	30/33	30/35	27/30	94/94	32/35	35/40	29/32	96/96	-	-	-	-	-	-	-
		104B	7.9/10.5	21.9/25.3	34/39	35/40	31/35	94/94	37/41	40/45	33/37	96/96	-	-	-	-	-	-	-
		105A	12.0/16.0	33.4/38.5	49/55	50/60	44/50	94/94	51/57	60/60	47/52	96/96	-	-	-	-	-	-	-
		NONE	-	-	20	25	19	94	22	30	21	96	-	-	-	-	-	-	-
		101A	3.3/4.4	9.2/10.6	20/20	25/25	19/19	94/94	22/23	30/30	21/21	96/96	-	-	-	-	-	-	-
		102A	4.9/6.5	13.6/15.6	24/26	25/30	22/24	94/94	26/29	30/30	24/26	96/96	-	-	-	-	-	-	-
		103B	6.5/8.7	18.1/20.9	30/33	30/35	27/30	94/94	32/35	35/40	29/32	96/96	-	-	-	-	-	-	-
		104B	7.9/10.5	21.9/25.3	34/39	35/40	31/35	94/94	37/41	40/45	33/37	96/96	-	-	-	-	-	-	-
		105A	12.0/16.0	33.4/38.5	49/55	50/60	44/50	94/94	51/57	60/60	47/52	96/96	-	-	-	-	-	-	-
50HC*A04	HIGH	NONE	-	-	21	26	20	132	23	30	23	134	-	-	-	-	-	-	
		101A	3.3/4.4	9.2/10.6	21/22	30/30	21/21	132/132	23/24	30/30	23/23	134/134	-	-	-	-	-	-	-
		102A	4.9/6.5	13.6/15.6	26/28	30/35	24/26	132/132	26/31	30/35	26/28	134/134	-	-	-	-	-	-	-
		103B	6.5/8.7	18.1/20.9	32/35	35/35	29/32	132/132	34/37	35/40	31/34	134/134	-	-	-	-	-	-	-
		104B	7.9/10.5	21.9/25.3	36/40	40/40	33/37	132/132	39/43	40/45	35/39	134/134	-	-	-	-	-	-	-
		105A	12.0/16.0	33.4/38.5	51/57	60/60	46/52	132/132	53/59	60/60	49/54	134/134	-	-	-	-	-	-	-
		NONE	-	-	21	26	20	132	23	30	23	134	-	-	-	-	-	-	-
		101A	3.3/4.4	9.2/10.6	21/22	30/30	21/21	132/132	23/24	30/30	23/23	134/134	-	-	-	-	-	-	-
		102A	4.9/6.5	13.6/15.6	26/28	30/35	24/26	132/132	26/31	30/35	26/28	134/134	-	-	-	-	-	-	-
		103B	6.5/8.7	18.1/20.9	32/35	35/35	29/32	132/132	34/37	35/40	31/34	134/134	-	-	-	-	-	-	-
		104B	7.9/10.5	21.9/25.3	36/40	40/40	33/37	132/132	39/43	40/45	35/39	134/134	-	-	-	-	-	-	-
		105A	12.0/16.0	33.4/38.5	51/57	60/60	46/52	132/132	53/59	60/60	49/54	134/134	-	-	-	-	-	-	-

See "Legend and Notes for Tables 72 - 75" on page 141

ELECTRICAL INFORMATION

Table 72 - UNIT WIRE/FUSE OR HACR BREAKER SIZING DATA WITH SINGLE SPEED INDOOR FAN MOTOR (cont)

UNIT	NOM. V-PH-HZ	ELEC. HTR			NO C.O. or UNPWR C.O.					NO PE.					w/ PE. (pwrdr fr/unit)						
		CRHEATER***A00	Nom (kW)	FLA	MCA	MAX FUSE or HACR BRKR	FLA	LRA	MCA	MAX FUSE or HACR BRKR	FLA	LRA	MCA	MAX FUSE or HACR BRKR	FLA	LRA	MCA	MAX FUSE or HACR BRKR	FLA	LRA	MCA
50HC*A04	DD-STD	NONE	-	-	12	43	13	15	15	14	44	14	15	20	14	45	15	20	16	17	46
		106A	6.0	7.2	13	43	16	15	14	15	44	17	15	20	15	45	18	20	17	17	46
		107A	8.8	10.6	17	43	20	20	18	20	44	21	20	25	20	45	23	25	20	20	46
		108A	11.5	13.8	23	43	24	24	25	25	44	25	25	30	27	45	27	30	24	24	46
	STD	109A	14.0	16.8	26	43	28	28	30	30	44	29	29	30	30	45	28	30	28	28	46
		NONE	-	-	10	48	12	15	15	14	49	13	15	20	14	50	14	20	14	14	51
		106A	6.0	7.2	11	48	14	15	15	15	49	15	15	20	15	50	17	20	15	15	51
		107A	8.8	10.6	17	48	18	20	18	20	49	20	20	25	19	50	21	25	19	19	51
	MED	108A	11.5	13.8	21	48	22	22	25	25	49	24	25	25	21	50	25	25	23	23	51
		109A	14.0	16.8	25	48	26	26	30	30	49	27	29	30	25	50	29	30	26	26	51
NONE		-	-	10	48	12	15	15	14	49	13	15	20	14	50	14	20	14	14	51	
106A		6.0	7.2	11	48	14	15	15	15	49	15	15	20	15	50	17	20	15	15	51	
HIGH	107A	8.8	10.6	17	48	18	20	18	20	49	20	20	25	19	50	21	25	19	19	51	
	108A	11.5	13.8	22	48	22	22	25	25	49	24	25	25	21	50	26	30	23	23	51	
	109A	14.0	16.8	25	48	26	26	30	30	49	27	29	30	25	50	29	30	26	26	51	
	NONE	-	-	11	67	13	15	15	14	68	14	15	20	15	69	15	20	15	15	70	
DD-STD	106A	6.0	7.2	12	67	15	15	15	15	68	16	16	20	15	69	18	20	16	16	70	
	107A	8.8	10.6	18	67	19	19	20	20	68	21	21	25	19	69	22	25	19	19	70	
	108A	11.5	13.8	22	67	23	23	25	25	68	25	25	25	22	69	26	30	23	23	70	
	109A	14.0	16.8	26	67	27	27	30	30	68	28	28	30	22	69	28	30	27	27	70	
STD	NONE	-	-	10	42	12	15	15	14	44	11	15	20	12	44	13	15	14	14	46	
	297A	9.2	9.2	15	42	19	20	20	20	44	19	19	20	20	44	21	25	19	19	46	
	298A	13.8	13.8	23	42	25	25	25	25	44	25	25	25	22	44	27	30	25	25	46	
	NONE	-	-	6	45	9	15	15	15	47	9	9	15	15	47	11	15	10	10	49	
MED	297A	9.2	9.2	12	45	16	20	20	20	47	16	16	20	14	47	18	20	16	16	49	
	298A	13.8	13.8	19	45	22	25	25	25	47	21	21	25	19	47	24	25	21	21	49	
	NONE	-	-	6	45	9	15	15	15	47	9	9	15	15	47	11	15	10	10	49	
	297A	9.2	9.2	13	45	16	20	20	20	47	16	16	20	14	47	18	20	16	16	49	
HIGH	298A	13.8	13.8	19	45	22	25	25	25	47	21	21	25	19	47	24	25	21	21	49	
	NONE	-	-	7	49	10	15	15	15	51	9	9	15	15	51	11	15	11	11	53	
	297A	9.2	9.2	13	49	17	20	20	20	51	17	17	20	15	51	19	20	17	17	53	
	298A	13.8	13.8	20	49	23	25	25	25	51	23	23	25	20	51	25	25	22	22	53	

See "Legend and Notes for Tables 72 - 75" on page 141

ELECTRICAL INFORMATION

Table 72 - UNIT WIRE/FUSE OR HACR BREAKER SIZING DATA WITH SINGLE SPEED INDOOR FAN MOTOR (cont)

UNIT	ELEC. HTR			NO C.O. or UNPWR C.O.													w/ PWRD C.O.												
	IFM TYPE	CRHEATER***A00	Nom (kW)	FLA	NO PE.				w/ PE. (pwrdr fr/unit)				NO PE.					w/ PE. (pwrdr fr/unit)											
					MAX FUSE or HACR BRKR	DISC. SIZE		MCA	MAX FUSE or HACR BRKR	DISC. SIZE		MCA	MAX FUSE or HACR BRKR	DISC. SIZE		MCA	MAX FUSE or HACR BRKR	DISC. SIZE											
						FLA	LRA			FLA	LRA			FLA	LRA			FLA	LRA										
	DD-STD	NONE 101A 103B 102A+102B 103B+103B 104B+104B	- 3.3/4.4 6.5/8.7 9.8/13.0 13.1/17.4 15.8/21.0	- 15.9/18.3 31.4/36.3 46.9/54.2 62.8/72.5 75.8/87.5	37 37/37 49/55 68/77 88/100 104/119	50 50/50 50/60 70/80 90/100 110/125	35 35/35 45/50 62/71 81/92 96/108	127 127/127 127/127 127/127 127/127	36 36/38 51/57 71/80 91/103 107/121	36 36/38 51/57 71/80 91/103 107/121	50 50/50 60/60 80/80 100/100 110/125	37 37/37 47/52 65/73 83/94 98/111	129 129/129 129/129 129/129 129/129	37 37/37 47/52 65/73 83/94 98/111	129 129/129 129/129 129/129 129/129	37 37/37 47/52 65/73 83/94 98/111	129 129/129 129/129 129/129 129/129	37 37/37 47/52 65/73 83/94 98/111	129 129/129 129/129 129/129 129/129	37 37/37 47/52 65/73 83/94 98/111	129 129/129 129/129 129/129 129/129								
208/230-1-60	STD	NONE 101A 103B 102A+102A 103B+103B 104B+104B	- 3.3/4.4 6.5/8.7 9.8/13.0 13.1/17.4 15.8/21.0	- 15.9/18.3 31.4/36.3 46.9/54.2 62.8/72.5 75.8/87.5	34 34/34 46/52 65/74 85/97 101/116	50 50/50 50/60 70/80 90/100 110/125	32 32/32 42/47 60/68 78/89 93/106	132 132/132 132/132 132/132 132/132	36 36/36 48/54 68/77 87/100 104/118	36 36/36 48/54 68/77 87/100 104/118	50 50/50 60/60 80/80 100/100 110/125	35 35/35 44/50 62/70 80/91 95/108	134 134/134 134/134 134/134 134/134	35 35/35 44/50 62/70 80/91 95/108	134 134/134 134/134 134/134 134/134	35 35/35 44/50 62/70 80/91 95/108	134 134/134 134/134 134/134 134/134	35 35/35 44/50 62/70 80/91 95/108	134 134/134 134/134 134/134 134/134	35 35/35 44/50 62/70 80/91 95/108	134 134/134 134/134 134/134 134/134								
50HC*A05	MED	NONE 101A 103B 102A+102A 103B+103B 104B+104B	- 4.9/6.5 6.5/8.7 12.0/16.0 15.8/21.0	- 13.6/15.6 18.1/20.9 33.4/38.5 43.8/50.5	26 26/26 32/36 51/58 64/73	30 30/30 35/40 60/60 70/80	26 26/26 29/33 47/53 59/67	93 93/93 93/93 93/93	28 28/29 35/38 54/60 67/75	28 28/29 35/38 54/60 67/75	40 40/40 40/40 60/60 70/80	28 28/29 35/38 54/60 67/75	95 95/95 95/95 95/95	31 31/32 35/38 52/58 64/72	95 95/95 95/95 95/95	31 31/32 35/38 52/58 64/72	95 95/95 95/95 95/95	31 31/32 35/38 52/58 64/72	95 95/95 95/95 95/95	31 31/32 35/38 52/58 64/72	95 95/95 95/95 95/95	31 31/32 35/38 52/58 64/72	95 95/95 95/95 95/95						
208/230-3-60	STD	NONE 102A 103B 105A 104B+104B	- 4.9/6.5 6.5/8.7 12.0/16.0 15.8/21.0	- 13.6/15.6 18.1/20.9 33.4/38.5 43.8/50.5	24 24/26 30/33 49/55 62/70	30 30/30 30/35 50/60 70/70	23 23/24 27/30 44/50 56/64	105 105/105 105/105 105/105	26 26/26 32/35 51/57 64/72	26 26/26 32/35 51/57 64/72	30 30/30 35/40 60/60 70/80	26 26/26 32/35 51/57 64/72	107 107/107 107/107 107/107	29 29/29 36/39 55/61 68/76	107 107/107 107/107 107/107	29 29/29 36/39 55/61 68/76	107 107/107 107/107 107/107	29 29/29 36/39 55/61 68/76	107 107/107 107/107 107/107	29 29/29 36/39 55/61 68/76	107 107/107 107/107 107/107	29 29/29 36/39 55/61 68/76	107 107/107 107/107 107/107						
208/230-3-60	MED	NONE 102A 103B 105A 104B+104B	- 4.9/6.5 6.5/8.7 12.0/16.0 15.8/21.0	- 13.6/15.6 18.1/20.9 33.4/38.5 43.8/50.5	24 24/26 30/33 49/55 62/70	30 30/30 30/35 50/60 70/70	23 23/24 27/30 44/50 56/64	122 122/122 122/122 122/122	47 47/52 51/57 64/72	47 47/52 51/57 64/72	30 30/30 35/35 50/60 70/70	47 47/52 51/57 64/72	124 124/124 124/124 124/124	29 29/29 36/39 55/61 68/76	124 124/124 124/124 124/124	29 29/29 36/39 55/61 68/76	124 124/124 124/124 124/124	29 29/29 36/39 55/61 68/76	124 124/124 124/124 124/124	29 29/29 36/39 55/61 68/76	124 124/124 124/124 124/124	29 29/29 36/39 55/61 68/76	124 124/124 124/124 124/124						
	HIGH	NONE 102A 103B 105A 104B+104B	- 4.9/6.5 6.5/8.7 12.0/16.0 15.8/21.0	- 13.6/15.6 18.1/20.9 33.4/38.5 43.8/50.5	27 27/27 34/37 53/59 66/74	40 40/40 40/40 60/60 70/80	27 27/27 30/34 48/54 60/68	158 158/158 158/158 158/158	29 29/29 36/39 54/61 68/76	29 29/29 36/39 54/61 68/76	40 40/40 40/40 60/60 70/80	29 29/29 36/39 54/61 68/76	160 160/160 160/160 160/160	33 33/33 40/43 59/65 72/80	160 160/160 160/160 160/160	33 33/33 40/43 59/65 72/80	160 160/160 160/160 160/160	33 33/33 40/43 59/65 72/80	160 160/160 160/160 160/160	33 33/33 40/43 59/65 72/80	160 160/160 160/160 160/160	33 33/33 40/43 59/65 72/80	160 160/160 160/160 160/160						

See "Legend and Notes for Tables 72 - 75" on page 141

ELECTRICAL INFORMATION

Table 72 - UNIT WIRE/FUSE OR HACR BREAKER SIZING DATA WITH SINGLE SPEED INDOOR FAN MOTOR (cont)

UNIT	NOM. V-PH-HZ	ELEC. HTR				NO C.O. or UNPWR C.O.						NO PE.						w/ PWRD C.O.					
		IFM TYPE	CRHEATER***A00	Nom (kW)	FLA	NO PE.			w/ PE. (pwrdr fr/unit)			NO PE.			w/ PWRD C.O.			w/ PE. (pwrdr fr/unit)					
						MCA	FUSE or HACR BRKR	FLA	LRA	DISC. SIZE	MCA	FUSE or HACR BRKR	FLA	LRA	DISC. SIZE	MCA	FUSE or HACR BRKR	FLA	LRA	DISC. SIZE	MCA	FUSE or HACR BRKR	FLA
50HC*A05	DD-STD	NONE	-	-	-	13	47	14	20	14	48	15	48	15	20	15	49	16	20	16	20	16	50
		108A	6.0	7.2	13	47	16	20	17	48	17	49	20	49	17	20	15	49	18	20	17	50	
		108A	11.5	13.8	23	47	24	25	25	48	25	49	25	49	25	25	23	49	27	30	24	50	
		108A	14.0	16.8	26	47	28	30	30	48	29	49	30	49	26	30	26	49	30	30	28	50	
		108A+108A	23.0	27.7	40	36	47	41	45	48	43	48	45	48	38	45	39	49	44	45	40	50	
		NONE	-	-	11	52	13	15	53	12	15	53	20	54	14	20	14	54	15	20	15	55	
	STD	108A	6.0	7.2	11	52	14	15	53	15	53	20	54	15	20	14	54	17	20	15	55		
		108A	11.5	13.8	19	52	22	25	53	24	53	25	54	21	25	21	54	25	25	23	55		
		108A	14.0	16.8	25	52	26	30	53	27	53	30	54	27	30	25	54	29	30	26	55		
	MED	108A+108A	23.0	27.7	35	52	40	40	53	41	53	45	45	37	45	42	54	42	45	39	55		
		NONE	-	-	11	61	13	15	62	14	62	15	63	14	15	14	63	15	20	15	64		
		108A	6.0	7.2	11	61	14	14	62	15	62	15	63	14	15	14	63	17	20	15	64		
HIGH	108A	11.5	13.8	19	61	22	25	62	24	62	25	63	21	25	21	63	25	25	22	64			
	108A	14.0	16.8	25	61	26	30	62	27	62	30	63	27	30	25	63	29	30	26	64			
	108A+108A	23.0	27.7	35	61	39	40	62	41	62	45	45	37	45	42	63	42	45	38	64			
DD-STD	NONE	-	-	13	79	14	20	80	14	80	17	80	16	20	16	81	17	20	17	82			
	108A	6.0	7.2	13	79	16	20	80	14	80	17	80	16	20	16	81	19	20	17	82			
	108A	11.5	13.8	23	79	24	25	80	22	80	26	80	23	30	23	81	27	30	24	82			
	108A	14.0	16.8	27	79	28	30	80	25	80	29	80	27	30	27	81	31	35	28	82			
	108A+108A	23.0	27.7	40	79	42	45	80	38	80	43	80	39	45	44	81	44	45	40	82			
	NONE	-	-	11	39	13	15	41	13	41	15	41	13	15	13	41	15	20	15	43			
STD	297A	9.2	9.2	15	39	19	20	41	19	41	20	41	17	20	17	41	21	25	19	43			
	298A	13.8	13.8	20	39	25	25	41	25	41	25	41	23	25	22	41	27	30	25	43			
	NONE	-	-	8	42	10	15	44	10	44	15	44	10	15	10	44	12	15	12	46			
MED	297A	9.2	9.2	12	42	16	20	44	16	44	20	44	14	20	14	44	18	20	16	46			
	298A	13.8	13.8	18	42	22	25	44	22	44	25	44	19	25	19	44	24	25	21	46			
	NONE	-	-	8	42	11	15	44	11	44	15	44	11	15	10	44	13	15	13	46			
HIGH	297A	9.2	9.2	10	57	12	15	59	12	59	15	59	12	15	12	59	14	15	14	61			
	298A	13.8	13.8	14	57	18	20	59	18	59	20	59	16	20	16	59	20	20	18	61			
	NONE	-	-	19	57	24	25	59	24	59	25	59	21	25	21	59	26	30	23	61			

See "Legend and Notes for Tables 72 - 75" on page 141

ELECTRICAL INFORMATION

Table 72 - UNIT WIRE/FUSE OR HACR BREAKER SIZING DATA WITH SINGLE SPEED INDOOR FAN MOTOR (cont)

UNIT	NOM. V-PH-HZ	ELEC. HTR				NO PE.						w/ PE. (pwrd fr/unit)						w/ PWRD C.O.									
		CRHEATER***A00	Nom (kW)	FLA	IFM TYPE	MCA	MAX FUSE or HACR BRKR	FLA	LRA	MCA	MCA	MAX FUSE or HACR BRKR	FLA	LRA	DISC. SIZE	MCA	MCA	MAX FUSE or HACR BRKR	FLA	LRA	DISC. SIZE	MCA	MAX FUSE or HACR BRKR	FLA	LRA	DISC. SIZE	
50HC*A08	DD-STD	NONE	-	-	-	41	60	39	144	42	60	41	146	-	-	-	-	-	-	-	-	-	-	-	-	-	-
		102A	4.9/6.5	23.5/27.1	23.5/27.1	41/44	60/60	39/40	144/144	42/46	60/60	41/42	146/146	-	-	-	-	-	-	-	-	-	-	-	-	-	-
		103B	6.5/8.7	31.4/36.3	31.4/36.3	49/55	60/60	45/50	144/144	51/57	60/60	47/52	146/146	-	-	-	-	-	-	-	-	-	-	-	-	-	-
		102A+102A	9.8/13.0	46.9/54.2	46.9/54.2	68/77	70/80	62/71	144/144	71/80	80/80	65/73	146/146	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	103B+103B	13.1/17.4	62.8/72.5	62.8/72.5	88/100	90/100	81/92	144/144	91/103	100/110	83/94	146/146	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	104B+104B	15.8/21.0	75.8/87.5	75.8/87.5	104/119	110/125	96/109	144/144	107/121	110/125	98/111	148/148	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	NONE	-	-	-	38	60	36	149	40	60	38	151	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	102A	4.9/6.5	23.5/27.1	23.5/27.1	38/40	60/60	36/37	149/149	40/43	60/60	38/39	151/151	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
STD	103B	6.5/8.7	31.4/36.3	31.4/36.3	46/52	60/60	42/47	149/149	48/54	60/60	44/50	151/151	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	102A+102A	9.8/13.0	46.9/54.2	46.9/54.2	65/74	70/80	60/68	149/149	68/77	70/80	62/70	151/151	-	-	-	-	-	-	-	-	-	-	-	-	-		
	103B+103B	13.1/17.4	62.8/72.5	62.8/72.5	85/97	90/100	78/89	149/149	87/100	90/100	80/91	151/151	-	-	-	-	-	-	-	-	-	-	-	-	-		
	104B+104B	15.8/21.0	75.8/87.5	75.8/87.5	101/116	110/125	93/106	149/149	104/118	110/125	95/108	151/151	-	-	-	-	-	-	-	-	-	-	-	-	-		
MED	NONE	-	-	-	40	60	38	174	42	60	41	176	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	102A	4.9/6.5	23.5/27.1	23.5/27.1	40/43	60/60	38/39	174/174	42/45	60/60	41/41	176/176	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	103B	6.5/8.7	31.4/36.3	31.4/36.3	48/55	60/60	44/50	174/174	51/57	60/60	46/52	176/176	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	102A+102A	9.8/13.0	46.9/54.2	46.9/54.2	68/77	70/80	62/70	174/174	70/79	80/91	64/73	176/176	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
DD-STD	103B+103B	13.1/17.4	62.8/72.5	62.8/72.5	88/100	90/100	80/91	174/174	90/102	90/110	82/94	176/176	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	104B+104B	15.8/21.0	75.8/87.5	75.8/87.5	104/119	110/125	95/108	174/174	108/121	110/125	97/111	176/176	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	NONE	-	-	-	29	40	28	120	31	45	31	122	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	102A	4.9/6.5	23.5/27.1	23.5/27.1	29/29	40/40	28/28	120/120	31/32	45/45	31/31	122/122	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
STD	104B	7.9/10.5	21.9/25.3	21.9/25.3	37/41	40/45	34/38	120/120	38/44	45/45	36/40	122/122	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	105A	12.0/16.0	33.4/38.5	33.4/38.5	51/58	60/60	47/53	120/120	54/60	60/60	49/55	122/122	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	104B+104B	15.8/21.0	43.8/50.5	43.8/50.5	64/73	70/80	59/67	120/120	67/75	70/80	61/69	122/122	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	104B+105A	19.9/26.5	55.2/63.8	55.2/63.8	79/89	80/90	72/82	120/120	81/92	90/100	74/84	122/122	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
DD-STD	NONE	-	-	-	27	40	26	132	29	40	28	134	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	102A	4.9/6.5	13.6/15.6	13.6/15.6	27/27	40/40	26/26	132/132	29/29	40/40	28/28	134/134	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	104B	7.9/10.5	21.9/25.3	21.9/25.3	34/39	40/40	31/35	132/132	37/41	40/45	33/37	134/134	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	105A	12.0/16.0	33.4/38.5	33.4/38.5	49/55	50/60	44/50	132/132	51/57	60/60	47/52	134/134	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
STD	104B+104B	15.8/21.0	43.8/50.5	43.8/50.5	62/70	70/70	58/64	132/132	64/72	70/80	59/66	134/134	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	104B+105A	19.9/26.5	55.2/63.8	55.2/63.8	76/87	80/90	69/79	132/132	78/89	80/90	72/82	134/134	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	NONE	-	-	-	29/28	40/40	28/28	170	31/30	45/45	30/30	172	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	102A	4.9/6.5	13.6/15.6	13.6/15.6	29/28	40/40	28/28	170/170	31/31	45/45	30/30	172/172	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
MED	104B	7.9/10.5	21.9/25.3	21.9/25.3	36/40	40/40	33/37	170/170	39/43	45/45	35/39	172/172	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	105A	12.0/16.0	33.4/38.5	33.4/38.5	51/57	60/60	46/52	170/170	53/59	60/60	49/54	172/172	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	104B+104B	15.8/21.0	43.8/50.5	43.8/50.5	64/72	70/80	58/66	170/170	66/74	70/80	60/68	172/172	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	104B+105A	19.9/26.5	55.2/63.8	55.2/63.8	78/89	80/90	71/81	170/170	80/91	90/100	74/83	172/172	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
DD-STD	NONE	-	-	-	30/30	45/45	30/29	185	32/32	45/45	32/32	187	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	102A	4.9/6.5	13.6/15.6	13.6/15.6	30/30	45/45	30/29	185/185	32/33	45/45	32/32	187/187	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	104B	7.9/10.5	21.9/25.3	21.9/25.3	38/42	45/45	35/39	185/185	41/45	45/45	37/41	187/187	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	105A	12.0/16.0	33.4/38.5	33.4/38.5	53/59	60/60	48/54	185/185	58/61	60/70	50/56	187/187	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
HIGH	104B+104B	15.8/21.0	43.8/50.5	43.8/50.5	66/74	70/80	60/68	185/185	68/76	70/80	62/70	187/187	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	104B+105A	19.9/26.5	55.2/63.8	55.2/63.8	80/91	80/100	73/83	185/185	82/93	90/100	75/85	187/187	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	NONE	-	-	-	80/91	80/100	73/83	185/185	82/93	90/100	75/85	187/187	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	102A	4.9/6.5	13.6/15.6	13.6/15.6	80/91	80/100	73/83	185/185	82/93	90/100	75/85	187/187	-	-	-	-	-	-	-	-	-	-	-	-	-	-	

See "Legend and Notes for Tables 72 - 75" on page 141

ELECTRICAL INFORMATION

Table 72 - UNIT WIRE/FUSE OR HACR BREAKER SIZING DATA WITH SINGLE SPEED INDOOR FAN MOTOR (cont)

UNIT	NOM. V-PH-HZ	ELEC. HTR			NO C.O. or UNPWR C.O.						w/ PWRD C.O.							
		CRHEATER***A00	Nom (kW)	FLA	NO PE.			w/ PE. (pwrdr fr/unit)			NO PE.			w/ PE. (pwrdr fr/unit)				
					MCA	FUSE or HACR BRKR	FLA	DISC. SIZE	LRA	MCA	FUSE or HACR BRKR	FLA	DISC. SIZE	LRA	MCA	FUSE or HACR BRKR	FLA	DISC. SIZE
50HC*A06	DD-STD	NONE	-	-	14	20	14	58	15	59	16	17	20	16	60	17	17	61
		108A	6.0	7.2	14	20	14	58	16	59	16	17	20	16	60	18	17	61
		108A	11.5	13.8	23	25	20	58	24	59	25	25	30	25	60	27	30	61
		108A	14.0	16.8	26	30	24	58	28	59	29	30	30	26	60	30	28	61
		108A+108A	23.0	27.7	40	40	36	58	41	59	43	45	45	40	60	44	45	61
		108A+109A	25.5	30.7	44	45	40	58	45	59	47	50	48	50	42	60	44	61
		NONE	-	-	13	15	12	63	14	64	15	16	16	20	15	65	16	66
		108A	6.0	7.2	13	15	12	63	14	64	15	16	17	20	15	65	17	66
		108A	11.5	13.8	21	25	19	63	22	64	23	25	25	25	21	65	25	25
		108A	14.0	16.8	25	30	22	63	26	64	27	30	26	30	25	65	29	26
50HC*A06	MED	108A+108A	23.0	27.7	38	40	35	63	40	64	41	45	45	37	65	42	45	66
		108A+109A	25.5	30.7	42	45	38	63	43	64	45	45	50	41	65	46	50	
		NONE	-	-	14	20	13	82	15	83	16	17	20	16	84	17	17	85
		108A	6.0	7.2	14	20	13	82	15	83	16	17	20	16	84	18	17	85
		108A	11.5	13.8	22	25	20	82	23	83	25	25	25	22	84	26	23	85
		108A	14.0	16.8	26	30	23	82	27	83	28	30	30	26	84	30	27	85
		108A+108A	23.0	27.7	38	40	36	82	41	83	42	45	45	38	84	43	39	85
		108A+109A	25.5	30.7	43	45	39	82	44	83	46	50	47	50	42	84	47	43
		NONE	-	-	14	20	14	90	15	91	16	17	20	16	92	18	18	93
		108A	6.0	7.2	15	20	14	90	16	91	17	17	20	16	92	19	18	93
575-3-60	DD-STD	108A	11.5	13.8	23	25	20	90	24	91	26	26	30	23	92	27	30	24
		108A	14.0	16.8	27	30	24	90	28	91	29	30	30	27	92	31	35	28
		108A+108A	23.0	27.7	40	40	37	90	42	91	43	45	45	39	92	44	45	40
		108A+109A	25.5	30.7	44	45	40	90	45	91	47	50	50	43	92	48	50	44
		NONE	-	-	12	15	12	46	14	48	15	15	15	13	48	15	16	50
		298A	13.8	16.8	23	25	20	46	25	48	25	25	25	22	48	27	30	25
		301A	23.0	23.1	34	35	31	46	37	48	36	40	40	33	48	39	40	35
		NONE	-	-	9	15	8	49	11	51	11	15	15	10	51	13	15	12
		298A	13.8	16.8	19	20	17	49	22	51	21	25	25	19	51	24	25	21
		301A	23.0	23.1	31	35	28	49	33	51	33	35	35	30	51	35	35	32
575-3-60	STD	NONE	-	-	10	15	9	53	12	55	11	15	15	11	55	13	15	13
		298A	13.8	16.8	20	20	18	53	23	55	20	25	25	20	55	25	25	22
		301A	23.0	23.1	32	35	29	53	34	55	31	35	35	31	55	36	40	33
		NONE	-	-	11	15	10	64	12	66	12	15	15	12	66	14	15	14
		298A	13.8	16.8	21	25	19	64	24	66	23	25	25	21	66	26	30	23
		301A	23.0	23.1	33	35	30	64	35	66	35	35	35	32	66	37	40	34

See "Legend and Notes for Tables 72 - 75" on page 141

ELECTRICAL INFORMATION
Table 72 - UNIT WIRE/FUSE OR HACR BREAKER SIZING DATA WITH SINGLE SPEED INDOOR FAN MOTOR (cont)
 (Units Produced On or After 02/16/2015)

UNIT	IFM TYPE	ELEC. HTR			NO C.O. or UNPWR C.O.							NO PE.							w/ PWR C.O.														
		CRHEATER***A00	Nom (kW)	FLA	NO PE.			w/ P.E. (pwrd fr/unit)				NO PE.			w/ P.E. (pwrd fr/unit)				NO PE.			w/ PWR C.O.											
					MCA	MAX FUSE or HACR BRKR	FLA	DISC. SIZE	MCA	MCA	DISC. SIZE	FLA	FLA	LRA	MCA	MAX FUSE or HACR BRKR	FLA	DISC. SIZE	MCA	MCA	DISC. SIZE	FLA	FLA	LRA	MCA	MAX FUSE or HACR BRKR	FLA	DISC. SIZE	FLA	FLA	LRA		
50HC*A07	STD	NONE	-	-	33/33	50/50	32/32	178	37/37	37/37	50/50	36/36	182	38/38	38/38	50/50	37/37	183	42/42	42/42	60/60	46/46	42/42	42/42	187								
		264A	4.9/6.5	13.6/15.6	33/33	50/50	32/32	178/178	37/37	37/37	50/50	36/36	182/182	38/38	38/38	50/50	37/37	183/183	42/42	42/42	60/60	46/46	42/42	42/42	187/187								
		117A	7.8/10.4	21.7/25.0	38/38	50/50	32/34	178/178	43/43	47/47	50/50	36/39	182/182	44/44	49/49	50/50	37/40	183/183	49/49	49/49	60/60	42/44	42/44	42/44	187/187								
		110A	12.0/16.0	33.4/38.5	55/55	60/60	44/50	178/178	59/59		60/60	49/54	182/182	61/61		70/70	50/55	183/183	65/65		54/60		70/70	54/60	54/60	187/187							
		117A+117A	15.9/21.0	43.8/50.5	70/70	70/70	56/64	178/178	74/74		80/80	61/68	182/182	76/76		80/80	62/69	183/183	80/80		66/74		90/90	66/74	66/74	187/187							
		110A+117A	19.9/26.5	55.2/63.8	86/86	90/90	69/79	178/178	91/91		100/100	74/83	182/182	92/92		100/100	75/85	183/183	97/97		79/89		90/100	79/89	79/89	187/187							
		NONE	-	-	36/36	50/50	36/36	214	40/40	40/40	50/50	40/40	218	41/41	41/41	60/60	41/41	219	45/45	45/45	60/60	46/45	46/45	60/60	46/45	223							
	MED	264A	4.9/6.5	13.6/15.6	36/36	50/50	36/36	214/214	40/40	40/40	50/50	40/40	218/218	41/41	41/41	60/60	41/41	219/219	45/45	45/45	60/60	46/45	46/45	60/60	46/45	223/223							
		117A	7.8/10.4	21.7/25.0	42/42	50/50	36/38	214/214	47/47		50/50	40/43	218/218	48/48		60/60	41/44	219/219	53/53		60/60	46/48	46/48	60/60	46/48	223/223							
		110A	12.0/16.0	33.4/38.5	59/59	60/60	48/54	214/214	64/64		70/70	52/58	218/218	65/65		80/80	54/59	219/219	70/70		90/90	58/64	58/64	80/80	58/64	223/223							
		117A+117A	15.9/21.0	43.8/50.5	74/74	70/80	60/68	214/214	79/79		80/80	64/72	218/218	80/80		100/100	66/73	219/219	85/85		90/90	70/78	70/78	100/100	70/78	223/223							
		110A+117A	19.9/26.5	55.2/63.8	91/91	80/100	73/83	214/214	95/95		100/100	78/87	218/218	97/97		100/100	79/88	219/219	101/101		89/93		100/110	89/93	101/110	89/93	223/223						
		NONE	-	-	42/42	50/50	42/41	230			60/60	46/45	234	46/46		60/60	47/46	235	50/50		60/60	52/50	52/50	60/60	52/50	239							
		264A	4.9/6.5	13.6/15.6	42/42	50/50	42/41	230/230	48/48		60/60	46/45	234/234	46/46		60/60	47/46	235/235	50/50		60/60	52/50	52/50	60/60	52/50	239/239							
460-3-60	STD	117A	7.8/10.4	21.7/25.0	48/48	50/50	42/43	230/230	52/52		60/60	46/48	234/234	54/54		60/60	47/49	235/235	58/58		80/80	58/63	58/63	80/80	58/63	239/239							
		110A	12.0/16.0	33.4/38.5	64/64	60/70	54/59	230/230	69/69		80/80	58/63	234/234	70/70		90/90	60/64	235/235	75/75		90/90	64/69	64/69	90/90	64/69	239/239							
		117A+117A	15.9/21.0	43.8/50.5	79/79	80/80	66/73	230/230	84/84		100/100	70/77	234/234	85/85		100/110	72/78	235/235	90/90		100/110	76/83	76/83	110/110	76/83	239/239							
		110A+117A	19.9/26.5	55.2/63.8	96/96	100/100	79/88	230/230	101/101		100/110	83/92	234/234	102/102		100/110	85/93	235/235	107/107		110/110	89/98	89/98	110/110	89/98	239/239							
		NONE	-	-	15	20	14	88			20	16	90	17		20	17	90	19		25	19	19	25	19	92							
		268A	6.0	7.2	15	20	14	88			20	16	90	17		20	17	90	21		25	21	21	25	21	92							
		266A	11.5	13.8	21	25	19	88			25	18	90	24		25	21	90	26		30	26	26	30	26	92							
	MED	267A	14.0	16.8	25	25	22	88			30	24	90		30	25	90	30		40	30	30	30	30	27	92							
		268A	23.0	27.7	38	40	35	88			45	37	90		45	37	90	43		50	43	45	45	45	39	92							
		269A	25.5	30.7	42	45	38	88			45	40	90		45	41	90	47		50	47	50	50	47	41	92							
		NONE	-	-	17	20	16	106			25	18	108	19		25	19	108	21		30	21	21	30	21	92							
		268A	6.0	7.2	17	20	16	106			25	18	108	19		25	19	108	21		30	21	21	30	21	92							
		266A	11.5	13.8	23	25	21	106			25	20	106	26		30	23	108	28		40	26	26	40	26	92							
		267A	14.0	16.8	27	30	24	106			30	26	108	29		30	27	108	32		40	27	27	40	27	92							
575-3-60	STD	268A	23.0	27.7	40	40	37	106		45	39	108	43		45	39	108	43		50	43	45	45	44	92								
		269A	25.5	30.7	47	50	43	114		45	40	108	47		50	42	108	49		60	47	50	50	47	92								
		NONE	-	-	19	25	19	114			25	18	116	21		25	19	116	23		30	21	21	30	21	92							
		268A	6.0	7.2	19	25	19	114			25	21	116	21		25	21	116	23		30	21	21	30	21	92							
		266A	11.5	13.8	26	30	23	114			28	25	116	28		30	26	116	31		40	26	26	40	26	92							
		267A	14.0	16.8	29	30	27	114			32	29	116	32		35	29	116	34		40	29	29	40	29	92							
		268A	23.0	27.7	43	45	39	114			45	41	116	46		50	42	116	48		60	46	46	60	46	92							
	MED	269A	25.5	30.7	47	50	43	114			49	45	116	50		50	45	116	52		60	47	50	50	47	92							
		NONE	-	-	12	15	11	66			15	15	70	13		15	13	68	17		20	13	17	20	13	92							
		118A	17.0	20.4	28	30	25	66			30	30	70	30		30	27	68	35		35	27	35	35	27	92							
		299A	25.7	25.8	35	35	32	66			35	33	70	37		40	33	68	42		45	33	33	45	33	92							
		NONE	-	-	13	15	12	81			17	20	85	14		20	14	83	18		20	14	18	20	14	92							
		118A	17.0	20.4	29	30	27	81			34	31	85	32		35	29	83	36		40	29	29	40	29	92							
		299A	25.7	25.8	36	40	33	81			40	35	85	37		45	35	83	43		45	33	33	45	33	92							
HIGH	NONE	-	-	16	20	15	95			19	20	99	17		20	17	97	21		25	17	21	25	17	92								
	118A	17.0	20.4	33	35	30	95			38	40	99	35		35	32	97	40		40	32	40	40	32	92								
	299A	25.7	25.8	40	40	36	95			44	45	99	42		45	38	97																

ELECTRICAL INFORMATION
Table 72 - UNIT WIRE/FUSE OR HACR BREAKER SIZING DATA WITH SINGLE SPEED INDOOR FAN MOTOR (cont)
(Units Produced On or Prior to 02/15/2015)

UNIT	NO M. V-PH-HZ	ELEC. HTR			NO C.O. or UNPWR C.O.							w/ PWRD C.O.							
		CRHEATER ***A00	Nom (kW)	FLA	NO P.E.			w/ P.E. (pwrd fr/unit)				NO P.E.				w/ P.E. (pwrd fr/unit)			
					MAX FUSE or HACR BRKR	DISC. SIZE FLA	LRA	MCA	MAX FUSE or HACR BRKR	MCA	DISC. SIZE FLA	LRA	MCA	MAX FUSE or HACR BRKR	DISC. SIZE FLA	LRA	MCA	MAX FUSE or HACR BRKR	DISC. SIZE FLA
50HC*A07 (1-stage cool)	460-3-60	NONE	-	-	32/32	50/50	31/31	165	36/36	50/50	36/35	37/37	50/50	37/36	41/41	50/50	41/41	174	
		264A	4.9/6.5	13.6/15.6	32/32	50/50	31/31	165/165	36/36	50/50	36/35	37/37	50/50	37/36	41/41	50/50	41/41	174/174	
		117A	7.8/10.4	21.7/25.0	34/38	50/50	31/34	165/165	39/43	50/50	36/39	40/44	50/50	37/40	45/49	50/50	41/44	174/174	
		110A	12.0/16.0	33.4/38.5	49/55	50/60	44/50	165/165	53/59	60/60	49/54	55/61	60/70	50/55	59/65	60/70	54/60	174/174	
		117A+117A	15.8/21.0	43.8/50.5	62/70	70/70	59/64	165/165	66/74	70/80	61/68	68/76	70/80	62/69	72/80	80/90	66/74	174/174	
		110A+117A	19.9/26.5	55.2/63.8	76/86	80/90	69/79	165/165	81/91	90/100	74/83	82/92	90/100	75/85	87/97	90/100	79/89	174/174	
		NONE	-	-	36/36	50/50	35/35	201	39/39	50/50	39/39	40/40	44/44	50/60	40/40	45/45	60/60	45/45	210
		264A	4.9/6.5	13.6/15.6	36/36	50/50	35/35	201/201	39/39	50/50	39/39	40/40	44/44	50/60	40/40	45/45	60/60	45/45	210/210
50HC*A07 (1-stage cool)	460-3-60	117A	7.8/10.4	21.7/25.0	38/42	50/50	35/38	201/201	43/47	50/50	39/43	40/44	50/50	40/44	49/53	60/60	45/48	210/210	
		110A	12.0/16.0	33.4/38.5	53/59	60/60	48/54	201/201	57/64	60/70	52/58	59/65	70/70	54/59	63/70	70/70	58/64	210/210	
		117A+117A	15.8/21.0	43.8/50.5	66/74	70/80	60/68	201/201	70/79	80/80	64/72	72/80	80/80	66/73	76/85	80/90	70/78	210/210	
		110A+117A	19.9/26.5	55.2/63.8	80/91	80/100	79/83	201/201	85/95	90/100	78/87	86/97	90/100	79/88	83/93	100/110	83/83	210/210	
		NONE	-	-	41/40	50/50	41/40	217	45/44	60/60	45/44	46/45	49/49	60/60	46/45	49/49	60/60	51/50	226
		264A	4.9/6.5	13.6/15.6	41/40	50/50	41/40	217/217	45/44	60/60	45/44	46/45	49/49	60/60	46/45	49/49	60/60	51/50	226/226
		117A	7.8/10.4	21.7/25.0	45/48	50/50	41/43	217/217	49/52	60/60	45/48	46/49	55/58	60/60	46/49	55/58	60/60	51/53	226/226
		110A	12.0/16.0	33.4/38.5	59/64	60/70	54/59	217/217	64/69	70/70	58/63	65/70	70/70	60/64	64/69	70/75	70/80	64/69	226/226
50HC*A07 (1-stage cool)	460-3-60	117A+117A	15.8/21.0	43.8/50.5	72/79	80/80	68/73	217/217	77/84	80/90	70/77	78/85	80/90	72/78	83/90	90/90	76/83	226/226	
		110A+117A	19.9/26.5	55.2/63.8	86/96	90/100	79/88	217/217	91/101	100/110	83/92	92/102	100/110	85/93	97/107	100/110	89/98	226/226	
		NONE	-	-	17	25	16	84	18	20	18	19	19	25	18	21	25	20	88
		265A	6.0	7.2	17	25	16	84	18	20	18	19	19	25	18	21	25	20	88
		268A	11.5	13.8	21	25	19	84	23	25	21	24	26	30	25	26	30	27	88
		267A	14.0	16.8	25	22	22	84	27	30	24	24	29	30	25	30	30	27	88
		268A	23.0	27.7	38	40	35	84	40	45	37	37	41	45	37	43	45	39	88
		269A	25.5	30.7	42	45	38	84	44	45	40	40	45	45	41	47	50	43	88
575-3-60	460-3-60	NONE	-	-	18	25	18	102	20	20	20	20	25	20	22	30	22	106	
		265A	6.0	7.2	18	25	18	102	20	20	20	20	25	20	22	30	22	106	
		268A	11.5	13.8	23	25	21	102	25	25	23	23	30	23	28	30	25	106	
		267A	14.0	16.8	27	30	24	102	29	30	26	29	30	27	32	35	29	106	
		268A	23.0	27.7	40	40	37	102	43	45	39	43	45	39	44	45	41	106	
		269A	25.5	30.7	44	45	38	102	46	50	42	40	47	45	48	50	44	106	
		NONE	-	-	21	25	20	110	22	20	22	23	23	30	23	25	30	25	114
		265A	6.0	7.2	21	25	20	110	22	20	22	23	23	30	23	25	30	25	114
575-3-60	460-3-60	268A	11.5	13.8	26	30	23	110	28	30	25	28	30	26	31	35	28	114	
		267A	14.0	16.8	29	30	27	110	32	35	29	32	35	29	34	35	31	114	
		268A	23.0	27.7	43	45	39	110	45	45	41	46	50	42	48	50	44	114	
		269A	25.5	30.7	47	50	43	110	49	50	45	50	50	45	52	60	47	114	
		NONE	-	-	13	15	12	61	16	20	16	14	20	14	18	20	18	67	
		118A	17.0	20.4	28	30	25	61	33	35	30	27	32	35	32	36	32	67	
		299A	25.7	25.8	35	35	32	61	39	40	36	33	42	45	38	45	38	67	
		NONE	-	-	14	20	13	76	18	20	17	15	15	20	15	19	25	19	82
575-3-60	460-3-60	118A	17.0	20.4	29	30	27	76	34	35	31	32	35	29	36	40	33	82	
		299A	25.7	25.8	36	40	33	76	41	45	37	38	40	35	43	45	39	82	
		NONE	-	-	17	20	16	90	20	25	21	18	25	25	23	25	23	96	
		118A	17.0	20.4	33	35	30	90	38	40	34	35	35	32	40	40	36	96	
		299A	25.7	25.8	40	40	36	90	44	45	40	42	45	38	47	50	42	96	

ELECTRICAL INFORMATION

Table 72 - UNIT WIRE/FUSE OR HACR BREAKER SIZING DATA WITH SINGLE SPEED INDOOR FAN MOTOR (cont)

Table with columns: UNIT, IFM TYPE, ELEC. HTR, NO C.O. or UNPWR C.O., NO P.E., w/ P.E. (pwr'd fr/unit), NO P.E., w/ P.E. (pwr'd fr/unit). Rows include IFM TYPE (STD, MED, HIGH) and UNIT (208/230-3-60, 50HC*09, 460-3-60, 575-3-60).

See "Legend and Notes for Tables 72 - 75" on page 141

ELECTRICAL INFORMATION

Table 72 - UNIT WIRE/FUSE OR HACR BREAKER SIZING DATA WITH SINGLE SPEED INDOOR FAN MOTOR (cont)

UNIT	IFM TYPE	ELEC. HTR				NO C.O. or UNPWR C.O.						w/ PWRD C.O.										
		CRHEATER**A00	Nom (kW)	FLA	MCA	MAX FUSE or BRKR	NO PE.	DISC. SIZE	MCA	w/ P.E. (pwrd fr/unit)	MAX FUSE or BRKR	NO PE.	DISC. SIZE	MCA	w/ P.E. (pwrd fr/unit)							
						FLA	LRA	FLA	LRA	FLA	LRA	FLA	LRA	FLA	LRA							
50HC*D12	STD	NONE	-	-	49/49	52/51	309	53/53	60/60	56/56	313	54/54	60/60	60/60	57/57	314	58/58	70/70	62/61	318		
		117A	7.8/10.4	21.7/25.0	49/49	309/309	56/56	313/313	53/53	60/60	56/56	313/313	54/54	60/60	60/60	57/57	314/314	58/58	70/70	62/61	318/318	
		110A	12.0/16.0	33.4/38.5	51/57	309/309	52/52	309/309	56/62	60/70	56/56	313/313	57/63	60/70	60/70	57/58	314/314	62/68	70/70	62/62	318/318	
		112A	24.0/32.0	66.7/77.0	92/105	309/309	89/96	309/309	97/110	100/110	89/101	313/313	98/111	100/125	100/125	90/102	314/314	103/116	110/125	95/106	318/318	
		112A+117A	31.8/42.4	88.4/102.0	120/136	309/309	110/125	309/309	124/141	125/150	114/129	313/313	126/142	150/150	150/150	115/131	314/314	130/147	150/150	119/135	318/318	
	MED	112A+110A	37.6/50.0	104.2/120.3	139/129	309/309	128/146	309/309	144/134	150/150	132/150	313/313	145/135	150/150	133/152	314/314	150/140	150/140	150/150	138/156	318/318	
		NONE	-	-	53	338	56	338	57	60	60	342	58	70	61	343	62	70	66	347		
		117A	7.8/10.4	21.7/25.0	53/53	338/338	56/56	338/338	57/57	60/60	60/60	342/342	58/58	70/70	70/70	61/61	343/343	62/62	70/70	66/66	347/347	
		110A	12.0/16.0	33.4/38.5	55/62	338/338	56/56	338/338	60/67	60/70	60/61	342/342	61/68	70/70	70/70	61/62	343/343	66/73	70/80	66/66	347/347	
		112A	24.0/32.0	66.7/77.0	97/110	338/338	89/101	338/338	102/115	110/125	93/105	342/342	103/116	110/125	110/125	94/106	343/343	108/121	110/125	99/111	347/347	
HIGH	112A+117A	31.8/42.4	88.4/102.0	124/141	338/338	114/129	338/338	129/146	150/150	118/134	342/342	130/147	150/150	119/135	343/343	135/152	150/175	124/139	347/347			
	112A+110A	37.6/50.0	104.2/120.3	144/134	338/338	132/151	338/338	149/139	150/150	136/155	342/342	150/140	150/150	138/156	343/343	155/145	175/175	142/160	347/347			
	NONE	-	-	56/55	340	59/58	340	60/59	60/60	64/63	344	61/60	60/60	70/70	65/64	345	65/64	80/70	69/68	349		
	117A	7.8/10.4	21.7/25.0	56/55	340/340	59/58	340/340	60/59	70/70	64/63	344/344	61/60	70/70	70/70	65/64	345/345	65/64	80/70	69/68	349/349		
	110A	12.0/16.0	33.4/38.5	59/64	340/340	59/59	340/340	64/69	60/70	64/63	344/344	65/70	70/70	70/70	65/64	345/345	70/75	80/80	69/69	349/349		
460-3-60	STD	NONE	-	-	24	25	148	26	30	27	150	26	30	28	150	28	28	30	30	152		
		116A	13.9	16.7	26	148	25	148	28	30	27	150	28	30	28	150	31	35	30	152		
		119A	16.5	19.8	29	148	27	148	32	35	29	150	32	35	29	150	34	35	31	152		
		115A	33.0	39.7	54	148	50	148	57	60	52	150	57	60	60	52	150	59	60	54	152	
		114A+116A	41.7	50.2	67	148	62	148	70	70	64	150	70	70	70	64	150	72	80	66	152	
	MED	115A+113A	50.0	60.1	80	163	73	148	67	70	75	165	68	70	76	165	70	70	80	78	152	
		NONE	-	-	26	163	27	163	28	30	29	165	28	30	30	165	30	30	35	32	167	
		116A	13.9	16.7	28	163	27	163	30	30	29	165	31	35	30	165	30	30	35	32	167	
		119A	16.5	19.8	32	163	29	163	34	35	31	165	35	35	35	165	37	40	40	32	167	
		115A	33.0	39.7	57	163	52	163	59	60	54	165	59	60	60	54	165	62	70	56	167	
575-3-60	STD	114A+116A	41.7	50.2	70	163	64	72	80	66	165	73	80	80	66	165	75	80	80	68	167	
		115A+113A	50.0	60.1	67	163	75	163	69	70	77	165	70	80	80	78	165	72	80	80	68	167
		NONE	-	-	27	164	29	164	29	35	31	166	29	35	35	166	31	35	33	168		
		116A	13.9	16.7	29	164	29	164	32	35	31	166	32	35	35	166	34	35	33	168		
		119A	16.5	19.8	33	164	30	164	35	35	32	166	36	40	40	166	38	40	35	168		
	MED	115A	33.0	39.7	58	164	53	164	60	60	55	166	61	70	56	166	63	70	58	168		
		114A+116A	41.7	50.2	71	164	65	164	73	80	66	166	74	80	80	66	166	76	80	70	168	
		115A+113A	50.0	60.1	69	164	76	164	71	80	79	166	71	80	80	79	166	74	80	81	168	
		NONE	-	-	18	105	18	105	22	25	23	109	19	25	25	107	23	25	25	25	111	
		118A	17.0	20.4	28	105	26	105	33	30	28	107	35	35	35	107	35	35	35	32	111	
575-3-60	STD	119A	34.0	40.9	54	105	59	59	60	54	109	56	60	60	51	107	61	70	56	70		
		118A+119A	51.0	61.3	64	105	69	69	70	70	77	109	66	70	70	75	107	71	80	79		
		NONE	-	-	19	116	19	116	22	25	24	120	20	25	25	118	24	26	26	111		
		118A	17.0	20.4	29	116	27	116	34	30	27	120	32	35	35	118	29	36	40	33		
		119A	34.0	40.9	55	116	50	116	60	60	55	120	57	60	60	52	118	62	70	57		
	MED	118A+119A	51.0	61.3	65	116	74	116	70	80	78	120	67	70	76	118	72	80	80	80		
		NONE	-	-	21	130	22	130	25	30	27	134	23	25	24	132	27	30	29	26		
		118A	17.0	20.4	33	130	30	130	38	40	34	134	35	35	35	132	40	40	40	36		
		119A	34.0	40.9	59	130	53	130	63	70	58	134	61	70	70	55	132	65	70	60		
		118A+119A	51.0	61.3	69	130	77	130	74	80	81	134	71	80	80	79	132	76	80	83		

See "Legend and Notes for Tables 72 - 75" on page 141

ELECTRICAL INFORMATION

Table 72 - UNIT WIRE/FUSE OR HACR BREAKER SIZING DATA WITH SINGLE SPEED INDOOR FAN MOTOR (cont)

UNIT	NOM. V-PH-HZ	ELEC. HTR			NO C.O. or UNPWR C.O.						w/ PWRD C.O.									
		IFM TYPE	CRHEATER**A00	Nom (kW)	FLA	NO PE.			w/ P.E. (pwrdr fr/unit)			NO PE.			w/ P.E. (pwrdr fr/unit)					
						MCA	MAX FUSE or HACR BRKR	FLA	DISC. SIZE	LRA	MCA	MAX FUSE or HACR BRKR	FLA	DISC. SIZE	LRA	MCA	MAX FUSE or HACR BRKR	FLA	DISC. SIZE	LRA
STD		NONE	-	-	20	25	21	138	24	30	25	142	22	25	23	140	26	30	27	144
		293A	16.5	15.9	24	25	22	138	29	30	26	142	26	30	23	140	31	35	28	144
		290A+293A	26.5	25.5	36	40	33	138	41	45	37	142	38	40	35	140	43	45	39	144
		296A	33.5	32.2	44	45	40	138	49	50	45	142	46	50	42	140	51	60	47	144
		290A+296A	43.5	41.8	56	60	51	138	61	70	56	142	58	60	53	140	63	70	58	144
MED	575-3-60	293A+296A	50.0	48.1	52	60	59	138	57	60	63	142	54	60	60	140	59	60	65	144
		NONE	-	-	20	25	21	138	24	30	25	142	22	25	23	140	26	30	27	144
		293A	16.5	15.9	24	25	22	138	29	30	26	142	26	30	23	140	31	35	28	144
		290A+293A	26.5	25.5	36	40	33	138	41	45	37	142	38	40	35	140	43	45	39	144
		296A	33.5	32.2	44	45	40	138	49	50	45	142	46	50	42	140	51	60	47	144
HIGH	50HC-D14	290A+296A	43.5	41.8	60	60	51	138	61	70	56	142	58	60	53	140	63	70	58	144
		293A+296A	50.0	48.1	52	60	59	138	57	60	63	142	54	60	60	140	59	60	65	144
		NONE	-	-	24	25	25	141	27	30	29	145	25	30	27	143	29	35	31	147
		293A	16.5	15.9	28	30	25	141	33	35	30	145	30	30	27	143	35	35	32	147
		290A+293A	26.5	25.5	40	40	36	141	45	45	41	145	42	45	38	143	47	50	43	147
HIGH		296A	33.5	32.2	48	50	44	141	53	60	48	145	50	60	46	143	55	60	50	147
		290A+296A	43.5	41.8	60	60	55	141	65	70	59	145	62	70	57	143	67	70	61	147
		293A+296A	50.0	48.1	56	60	62	141	61	70	67	145	58	60	64	143	63	70	69	147

See "Legend and Notes for Tables 72 - 75" on page 141

ELECTRICAL INFORMATION

Table 72 - UNIT WIRE/FUSE OR HACR BREAKER SIZING DATA WITH SINGLE SPEED INDOOR FAN MOTOR (cont)
 (Units Produced On or Prior to 02/15/2015)

UNIT	NO M. V-PH-HZ	ELEC. HTR				NO C.O. or UNPWR C.O.							w/ PWRD C.O.								
		CHRHEATER ***A00	Nom (KW)	FLA	NO PE.				w/ P.E. (pwrd fr/unit)			NO PE.				w/ P.E. (pwrd fr/unit)					
					MCA	MAX FUSE or HACR BRKR	DISC. SIZE FLA	DISC. SIZE LRA	MCA	MAX FUSE or HACR BRKR	DISC. SIZE FLA	DISC. SIZE LRA	MCA	MAX FUSE or HACR BRKR	DISC. SIZE FLA	DISC. SIZE LRA					
STD		NONE	—	—	59/58	330	60/60	70/70	70/70	63/63	334	61/61	70/70	70/70	64/64	335	65/65	80/80	80/80	68/68	339
		291A	12.4/16.5	34.4/39.7	59/58	330/330	60/65	70/70	70/70	63/63	334/334	61/66	80/80	80/80	64/64	335/335	65/71	80/80	80/80	68/68	339/339
		288A+291A	19.9/26.5	55.3/63.8	73/83	330/330	85/95	90/100	90/100	78/87	334/334	86/97	90/100	90/100	79/88	335/335	91/101	100/110	100/110	83/93	339/339
		294A	25.2/33.5	69.9/80.6	90/102	330/330	103/116	110/125	110/125	94/107	334/334	104/118	110/125	110/125	96/108	335/335	109/122	110/125	110/125	100/112	339/339
		288A+294A	32.7/43.5	90.7/104.7	114/130	330/330	129/146	150/150	150/150	118/134	334/334	130/148	150/150	150/150	119/135	335/335	135/152	150/175	150/175	124/140	339/339
291A+294A	37.6/50.0	104.3/120.3	130/148	330/330	148/136	150/150	150/150	134/152	334/334	147/137	150/150	150/150	135/153	335/335	152/142	175/150	175/150	139/158	339/339		
MED		NONE	—	—	61	344	62	80	65	348	63	80	80	67	349	67	80	80	71	353	
		291A	12.4/16.5	34.4/39.7	61/61	344/344	62/68	80/80	80/80	65/65	348/348	63/69	80/80	80/80	67/67	349/349	67/74	80/80	80/80	71/71	353/353
		288A+291A	19.9/26.5	55.3/63.8	76/86	344/344	88/98	90/100	90/100	80/90	348/348	89/99	90/100	90/100	81/91	349/349	94/104	100/110	100/110	86/95	353/353
		294A	25.2/33.5	69.9/80.6	93/105	344/344	106/119	110/125	110/125	97/109	348/348	107/120	110/125	110/125	98/110	349/349	112/125	125/125	125/125	102/115	353/353
		288A+294A	32.7/43.5	90.7/104.7	116/133	344/344	132/149	150/150	150/150	121/137	348/348	133/151	150/175	150/175	122/138	349/349	138/155	150/175	150/175	126/142	353/353
291A+294A	37.6/50.0	104.3/120.3	132/151	344/344	149/139	150/150	150/150	137/155	348/348	150/140	150/150	150/150	138/156	349/349	155/145	175/175	175/175	142/160	353/353		
HIGH		NONE	—	—	72	350	72	80	77	354	73	80	80	78	355	77	80	90	82	359	
		291A	12.4/16.5	34.4/39.7	72/72	350/350	74/80	80/80	80/80	77/77	354/354	75/82	80/90	80/90	78/78	355/355	80/86	90/90	82/82	359/359	
		288A+291A	19.9/26.5	55.3/63.8	87/97	350/350	100/110	100/110	100/110	91/101	354/354	101/112	110/125	110/125	93/102	355/355	106/116	110/125	110/125	97/107	359/359
		294A	25.2/33.5	69.9/80.6	104/116	350/350	118/131	125/150	125/150	108/121	354/354	119/133	125/150	125/150	109/122	355/355	124/137	125/150	125/150	114/126	359/359
		288A+294A	32.7/43.5	90.7/104.7	128/144	350/350	144/162	150/175	150/175	132/148	354/354	145/163	150/175	150/175	133/149	355/355	150/168	150/175	150/175	138/154	359/359
291A+294A	37.6/50.0	104.3/120.3	143/162	350/350	161/151	175/175	175/175	148/166	354/354	162/152	175/175	175/175	149/167	355/355	167/157	175/175	175/175	153/172	359/359		
STD		NONE	—	—	30	166	31	35	32	168	31	40	40	32	168	33	40	40	35	170	
		292A	16.5	19.9	30	166	33	35	32	168	33	40	40	32	168	36	40	40	35	170	
		288A+292A	26.5	31.9	42	166	48	50	50	44	168	48	50	50	44	168	51	60	60	46	170
		295A	33.5	40.3	51	166	58	60	60	53	168	59	60	60	54	168	61	70	70	56	170
		288A+295A	43.5	52.3	65	166	73	80	80	67	168	74	80	80	68	168	76	80	80	70	170
292A+295A	50.0	60.2	74	166	68	80	80	76	168	69	80	80	77	168	71	80	80	79	170		
MED		NONE	—	—	31	173	32	40	33	175	32	40	40	34	175	34	40	40	36	177	
		292A	16.5	19.9	31	173	34	40	40	33	175	35	40	40	34	175	37	40	40	36	177
		288A+292A	26.5	31.9	43	173	49	50	50	45	175	50	50	50	45	175	52	60	60	47	177
		295A	33.5	40.3	52	173	60	60	60	55	175	60	60	60	55	175	62	70	70	57	177
		288A+295A	43.5	52.3	66	173	75	80	80	68	175	75	80	80	69	175	77	80	80	71	177
292A+295A	50.0	60.2	75	173	70	80	80	77	175	70	80	80	78	175	72	80	80	80	77		
HIGH		NONE	—	—	37	176	37	40	39	178	37	45	45	39	178	39	45	45	41	180	
		292A	16.5	19.9	37	176	40	40	40	39	178	41	45	45	39	178	43	45	41	180	
		288A+292A	26.5	31.9	48	176	55	60	60	50	178	56	60	60	51	178	58	60	60	53	180
		295A	33.5	40.3	58	176	66	70	70	60	178	66	70	70	61	178	69	70	70	63	180
		288A+295A	43.5	52.3	72	176	81	80	80	74	178	81	90	90	74	178	84	90	90	76	180
292A+295A	50.0	60.2	81	176	76	80	80	83	178	76	80	80	83	178	78	80	80	86	180		

ELECTRICAL INFORMATION

Table 72 - UNIT WIRE/FUSE OR HACR BREAKER SIZING DATA WITH SINGLE SPEED INDOOR FAN MOTOR (cont)

UNIT	NO M, V-PH-HZ	IFM TYPE	ELEC. HTR			NO C.O. or UNPWR C.O.						w/ PWRD C.O.									
			CRHEATER ***A00	Nom (kW)	FLA	NO PE.			w/ P.E. (pwrd fr/unit)			NO PE.			w/ P.E. (pwrd fr/unit)						
						MCA	MAX FUSE or HACR BRKR	DISC. SIZE FLA LRA	MCA	MAX FUSE or HACR BRKR	DISC. SIZE FLA LRA	MCA	MAX FUSE or HACR BRKR	DISC. SIZE FLA LRA	MCA	MAX FUSE or HACR BRKR	DISC. SIZE FLA LRA				
50HC*D14	575-3-60	STD	NONE	-	-	22	25	23	128	26	30	27	132	24	30	25	130	28	30	29	134
			293A	16.5	15.9	24	25	23	128	29	30	27	132	26	30	25	130	31	35	29	134
			290A+293A	26.5	25.5	36	40	33	128	41	45	37	132	38	40	35	130	43	45	39	134
			296A	33.5	32.2	44	45	40	128	49	50	45	132	46	50	42	130	51	60	47	134
			290A+296A	43.5	41.8	56	60	51	128	61	70	56	132	58	60	53	130	63	70	58	134
			293A+296A	50.0	48.1	52	60	59	128	57	60	63	132	54	60	60	130	59	60	65	134
50HC*D14	575-3-60	MED	NONE	-	-	22	25	23	128	26	30	27	132	24	30	25	130	28	30	29	134
			293A	16.5	15.9	24	25	23	128	29	30	27	132	26	30	25	130	31	35	29	134
			290A+293A	26.5	25.5	36	40	33	128	41	45	37	132	38	40	35	130	43	45	39	134
			296A	33.5	32.2	44	45	40	128	49	50	45	132	46	50	42	130	51	60	47	134
			290A+296A	43.5	41.8	56	60	51	128	61	70	56	132	58	60	53	130	63	70	58	134
			293A+296A	50.0	48.1	52	60	59	128	57	60	63	132	54	60	60	130	59	60	65	134
50HC*D14	575-3-60	HIGH	NONE	-	-	29	35	30	140	32	40	34	144	30	35	32	142	34	40	36	146
			293A	16.5	15.9	32	35	30	140	36	40	34	144	34	35	32	142	38	40	36	146
			290A+293A	26.5	25.5	44	45	40	140	48	50	44	144	46	50	42	142	50	60	46	146
			296A	33.5	32.2	52	60	47	140	57	60	52	144	54	60	49	142	59	60	54	146
			290A+296A	43.5	41.8	64	70	58	140	69	70	63	144	66	70	60	142	71	80	65	146
			293A+296A	50.0	48.1	60	70	66	140	65	70	70	144	62	70	68	142	67	70	72	146

ELECTRICAL INFORMATION

Table 73 – UNIT WIRE SIZING DATA WITH FACTORY INSTALLED HACR BREAKER WITH SINGLE SPEED INDOOR FAN MOTOR

UNIT	NOM. V-PH-HZ	ELEC. HTR				NO C.O. or UNPWR C.O.								w/ PWRD C.O.									
		IFM TYPE	CRHEATER***A00	Nom (kW)	FLA	NO PE.				w/ PE. (pwrdr fr/unit)				NO PE.				w/ PE. (pwrdr fr/unit)					
						MCA	HACR BRKR	DISC. SIZE		MCA	HACR BRKR	DISC. SIZE		MCA	HACR BRKR	DISC. SIZE		MCA	HACR BRKR	DISC. SIZE			
FLA	FLA	FLA	FLA	FLA	FLA	LRA	FLA	LRA	FLA	LRA	FLA	LRA	FLA	LRA	FLA	LRA	FLA	LRA					
50CH*A04	208/230-1-60	DD-STD	NONE	-	-	30	45	29	88	32	45	31	90	-	-	-	-	-	-	-			
			101A	3.3/4.4	15.9/18.3	33/33	45/45	29/30	88/88	35/35	45/45	31/32	90/90	-	-	-	-	-	-	-	-		
			102A	4.9/6.5	23.5/27.1	44/44	45/45	36/40	88/88	46/46	45/45	38/42	90/90	-	-	-	-	-	-	-	-		
			103B	6.5/8.7	31.4/36.3	55/55	60/60	45/50	88/88	57/57	60/60	47/52	90/90	-	-	-	-	-	-	-	-		
			104B	7.9/10.5	37.9/43.8	64/64	70/70	52/59	88/88	67/67	70/70	54/61	90/90	-	-	-	-	-	-	-	-		
			102A+102A	9.8/13.0	46.9/54.2	77/77	80/80	62/71	88/88	80/80	80/80	65/73	90/90	-	-	-	-	-	-	-	-		
			NONE	-	-	27	40	26	93	29	45	28	95	-	-	-	-	-	-	-	-		
			101A	3.3/4.4	15.9/18.3	29/29	40/40	26/27	93/93	32/32	45/45	28/29	95/95	-	-	-	-	-	-	-	-		
			102A	4.9/6.5	23.5/27.1	40/40	45/45	33/37	93/93	43/43	45/45	35/39	95/95	-	-	-	-	-	-	-	-		
			50CH*A04	208/230-3-60	DD-STD	NONE	-	-	22	30	22	82	24	30	24	84	-	-	-	-	-	-	-
101A	3.3/4.4	9.2/10.6				23/23	30/30	22/22	82/82	25/25	30/30	24/24	84/84	27/29	29	27	87	29	35	29	89		
102A	4.9/6.5	13.6/15.6				29/29	30/30	24/26	82/82	32/32	35/35	26/29	84/84	35/35	30/32	30/32	87/87	31/31	35/35	29/29	89/89		
103B	6.5/8.7	18.1/20.9				36/36	40/40	29/33	82/82	38/38	40/40	32/35	84/84	42/42	45/45	35/38	35/38	87/87	44/44	45/45	37/40	89/89	
104B	7.9/10.5	21.9/25.3				41/41	45/45	34/38	82/82	44/44	45/45	36/40	84/84	47/47	50/50	39/43	39/43	87/87	50/50	50/50	41/45	89/89	
105A	12.0/16.0	33.4/38.5				58/58	60/60	47/53	82/82	60/60	60/60	49/55	84/84	64/64	66/66	70/70	52/58	52/58	87/87	66/66	70/70	55/60	89/89
NONE	-	-				20	25	19	94	22	30	21	96	24	96	24	30	25	99	26	30	27	101
101A	3.3/4.4	9.2/10.6				20/20	25/25	19/19	94/94	23/23	30/30	21/21	96/96	26/26	96/96	26/26	30/30	25/25	99/99	29/29	30/30	27/27	101/101
102A	4.9/6.5	13.6/15.6				26/26	30/30	22/24	94/94	29/29	30/30	24/26	96/96	32/32	96/96	32/32	35/35	27/29	99/99	35/35	35/35	29/32	101/101
50CH*A04	208/230-3-60	STD				NONE	-	-	33/33	35/35	27/30	94/94	35/35	40/40	29/32	96/96	39/39	40/40	32/36	99/99	41/41	45/45	35/38
			103B	6.5/8.7	18.1/20.9	39/39	40/40	31/35	94/94	41/41	45/45	33/37	96/96	45/45	45/45	37/41	99/99	47/47	50/50	39/43	101/101		
			104B	7.9/10.5	21.9/25.3	39/39	40/40	31/35	94/94	41/41	45/45	33/37	96/96	45/45	45/45	37/41	99/99	47/47	50/50	39/43	101/101		
			105A	12.0/16.0	33.4/38.5	55/55	60/60	44/50	94/94	57/57	60/60	47/52	96/96	61/61	61/61	70/70	50/56	99/99	63/63	70/70	52/58	101/101	
			NONE	-	-	20	25	19	94	22	30	21	96	24	96	24	30	25	99	26	30	27	101
			101A	3.3/4.4	9.2/10.6	20/20	25/25	19/19	94/94	23/23	30/30	21/21	96/96	26/26	96/96	26/26	30/30	25/25	99/99	29/29	30/30	27/27	101/101
			102A	4.9/6.5	13.6/15.6	26/26	30/30	22/24	94/94	29/29	30/30	24/26	96/96	32/32	96/96	32/32	35/35	27/29	99/99	35/35	35/35	29/32	101/101
			103B	6.5/8.7	18.1/20.9	33/33	35/35	27/30	94/94	35/35	40/40	29/32	96/96	39/39	40/40	32/36	99/99	41/41	45/45	35/38	101/101	101/101	
			104B	7.9/10.5	21.9/25.3	39/39	40/40	31/35	94/94	41/41	45/45	33/37	96/96	45/45	45/45	37/41	99/99	47/47	50/50	39/43	101/101	101/101	
			105A	12.0/16.0	33.4/38.5	55/55	60/60	44/50	94/94	57/57	60/60	47/52	96/96	61/61	61/61	70/70	50/56	99/99	63/63	70/70	52/58	101/101	
50CH*A04	208/230-3-60	HIGH	NONE	-	-	21/21	30/30	21/21	132	23/23	30/30	23/23	134	26/26	30/30	27/26	137	28/28	35/35	29/29	139		
			101A	3.3/4.4	9.2/10.6	22/22	30/30	21/21	132/132	24/24	30/30	23/23	134/134	28/28	30/30	27/26	137/137	28/28	30/30	29/29	139/139		
			102A	4.9/6.5	13.6/15.6	28/28	30/30	24/26	132/132	31/31	35/35	26/28	134/134	31/33	31/33	29/31	137/137	31/33	30/30	31/33	139/139		
			103B	6.5/8.7	18.1/20.9	35/35	35/35	29/32	132/132	37/37	40/40	31/34	134/134	41/41	45/45	34/37	137/137	43/43	45/45	36/39	139/139		
			104B	7.9/10.5	21.9/25.3	40/40	45/40	33/37	132/132	43/43	45/45	35/39	134/134	46/46	46/46	39/42	137/137	49/49	50/50	41/45	139/139		
			105A	12.0/16.0	33.4/38.5	57/57	60/60	46/52	132/132	59/59	60/60	49/54	134/134	65/65	65/65	52/58	137/137	65/65	70/70	54/60	139/139		

See "Legend and Notes for Tables 72 -- 75" on page 141

ELECTRICAL INFORMATION

Table 73 - UNIT WIRE SIZING DATA WITH FACTORY INSTALLED HACR BREAKER WITH SINGLE SPEED INDOOR FAN MOTOR (cont)

UNIT	NOM. V-PH-HZ	ELEC. HTR			NO P.E.				NO P.E.				w/ PWRD C.O.							
		CRHEATER**A00	Nom (kW)	FLA	MCA	HACR BRKR	DISC. SIZE		MCA	HACR BRKR	DISC. SIZE		MCA	HACR BRKR	DISC. SIZE					
							FLA	LRA			FLA	LRA			FLA	LRA				
50HC*A04	DD-STD	NONE	-	-	12	15	12	43	13	15	13	44	14	20	14	45	15	20	16	46
		106A	6.0	7.2	14	15	13	43	16	20	14	44	17	20	15	45	18	20	17	46
		107A	8.8	10.6	19	20	17	43	20	20	18	44	23	25	21	45	23	25	21	46
		108A	11.5	13.8	23	25	20	43	24	25	22	44	25	25	23	45	27	30	24	46
		109A	14.0	16.8	26	30	24	43	28	30	25	44	29	30	26	45	30	30	28	46
		NONE	-	-	11	15	10	48	12	15	11	49	13	15	13	50	14	20	14	51
	STD	106A	6.0	7.2	13	15	11	48	14	15	12	49	15	15	14	50	17	20	15	51
		107A	8.8	10.6	17	20	15	48	18	20	16	49	20	20	18	50	21	25	19	51
		108A	11.5	13.8	21	25	19	48	22	25	20	49	24	25	21	50	25	25	23	51
		109A	14.0	16.8	25	25	22	48	26	30	23	49	27	30	25	50	29	30	26	51
		NONE	-	-	11	15	10	48	12	15	11	49	13	15	13	50	14	20	14	51
		106A	6.0	7.2	13	15	11	48	14	15	12	49	15	15	14	50	17	20	15	51
MED	107A	8.8	10.6	17	20	15	48	18	20	16	49	20	20	18	50	21	25	19	51	
	108A	11.5	13.8	21	25	19	48	22	25	20	49	24	25	21	50	25	25	23	51	
	109A	14.0	16.8	25	25	22	48	26	30	23	49	27	30	25	50	29	30	26	51	
	NONE	-	-	12	15	11	67	13	15	12	68	14	15	14	69	15	20	15	70	
	106A	6.0	7.2	14	15	12	67	15	15	13	68	16	16	15	69	18	20	16	70	
	107A	8.8	10.6	18	20	16	67	19	20	17	68	21	20	19	69	22	25	20	70	
HIGH	108A	11.5	13.8	22	25	20	67	23	25	21	68	25	25	22	69	26	30	23	70	
	109A	14.0	16.8	26	30	23	67	27	30	24	68	28	30	26	69	30	30	27	70	
	NONE	-	-	10	15	10	42	12	15	12	44	11	15	12	44	13	15	14	46	
	297A	9.2	9.2	17	20	15	42	19	20	17	44	19	20	17	44	21	25	19	46	
	298A	13.8	13.8	23	25	20	42	25	25	23	44	25	25	22	44	27	30	25	46	
	NONE	-	-	7	15	6	45	9	15	9	47	9	15	8	47	11	15	10	49	
DD-STD	297A	9.2	9.2	13	15	12	45	16	20	14	47	16	20	14	47	18	20	16	49	
	298A	13.8	13.8	19	20	17	45	22	25	19	47	21	25	19	47	24	25	21	49	
	NONE	-	-	7	15	6	45	9	15	9	47	9	15	8	47	11	15	10	49	
	297A	9.2	9.2	13	15	12	45	16	20	14	47	16	20	14	47	18	20	16	49	
	298A	13.8	13.8	19	20	17	45	22	25	19	47	21	25	19	47	24	25	21	49	
	NONE	-	-	8	15	7	49	10	15	9	51	9	15	9	51	11	15	11	53	
STD	297A	9.2	9.2	14	15	13	49	17	20	15	51	17	20	15	51	19	20	17	53	
	298A	13.8	13.8	20	20	18	49	23	25	20	51	22	25	20	51	25	25	22	53	
	NONE	-	-	20	20	18	49	23	25	20	51	22	25	20	51	25	25	22	53	
	297A	9.2	9.2	14	15	13	49	17	20	15	51	17	20	15	51	19	20	17	53	
	298A	13.8	13.8	20	20	18	49	23	25	20	51	22	25	20	51	25	25	22	53	
	NONE	-	-	20	20	18	49	23	25	20	51	22	25	20	51	25	25	22	53	

See "Legend and Notes for Tables 72 - 75" on page 141

ELECTRICAL INFORMATION

Table 73 - UNIT WIRE SIZING DATA WITH FACTORY INSTALLED HACR BREAKER WITH SINGLE SPEED INDOOR FAN MOTOR (cont)

UNIT	NOM. V-PH-HZ	ELEC. HTR					NO C.O. or UNPWR C.O.					w/ PWRD C.O.						
		CRHEATER***A00	Nom (kW)	FLA	NO PE.		w/ P.E. (pwrdr fr/unit)		NO PE.		w/ P.E. (pwrdr fr/unit)							
IFM TYPE					MCA	HACR BRKR	DISC. SIZE		MCA	HACR BRKR	DISC. SIZE		MCA	HACR BRKR	DISC. SIZE			
							FLA	FLA			LRA	FLA			LRA	FLA	LRA	
50HC*A05			NONE	-	37	50	35	127	38	50	37	129	-	-	-	-	-	
			101A	3.3/4.4	15.9/18.3	37/37	50/50	35/35	127/127	38/38	50/50	37/37	129/129	-	-	-	-	-
			103B	6.5/8.7	31.4/36.3	55/55	60/60	45/50	127/127	57/57	60/60	47/52	129/129	-	-	-	-	-
			102A+102A	9.8/13.0	46.9/54.2	77/77	80/80	62/71	127/127	80/80	80/80	65/73	129/129	-	-	-	-	-
			103B+103B	13.1/17.4	62.8/72.5	100/100	100/100	81/92	127/127	103/103	110/110	83/94	129/129	-	-	-	-	-
			104B+104B	15.8/21.0	75.8/87.5	119/119	125/125	96/109	127/127	121/121	125/125	98/111	129/129	-	-	-	-	-
			NONE	-	-	34	50	32	132	36	50	35	134	-	-	-	-	-
			101A	3.3/4.4	15.9/18.3	34/34	50/50	32/32	132/132	36/36	50/50	35/35	134/134	-	-	-	-	-
			103B	6.5/8.7	31.4/36.3	52/52	60/60	42/47	132/132	54/54	60/60	44/50	134/134	-	-	-	-	-
			102A+102A	9.8/13.0	46.9/54.2	74/74	80/80	60/68	132/132	77/77	80/80	62/70	134/134	-	-	-	-	-
103B+103B	13.1/17.4	62.8/72.5	97/97	100/100	78/89	132/132	100/100	100/100	80/91	134/134	-	-	-	-	-			
104B+104B	15.8/21.0	75.8/87.5	116/116	125/125	93/106	132/132	118/118	125/125	95/108	134/134	-	-	-	-	-			
208/230-1-60			NONE	-	34	50	32	132	36	50	35	134	-	-	-	-	-	
			101A	3.3/4.4	15.9/18.3	34/34	50/50	32/32	132/132	36/36	50/50	35/35	134/134	-	-	-	-	-
			103B	6.5/8.7	31.4/36.3	52/52	60/60	42/47	132/132	54/54	60/60	44/50	134/134	-	-	-	-	-
			102A+102A	9.8/13.0	46.9/54.2	74/74	80/80	60/68	132/132	77/77	80/80	62/70	134/134	-	-	-	-	-
			103B+103B	13.1/17.4	62.8/72.5	97/97	100/100	78/89	132/132	100/100	100/100	80/91	134/134	-	-	-	-	-
			104B+104B	15.8/21.0	75.8/87.5	116/116	125/125	93/106	132/132	118/118	125/125	95/108	134/134	-	-	-	-	-
			NONE	-	-	26	30	26	93	28	40	28	95	-	-	-	-	-
			102A	4.9/6.5	13.6/15.6	29/29	30/30	26/26	93/93	32/32	40/40	28/29	95/95	-	-	-	-	-
			103B	6.5/8.7	18.1/20.9	36/36	40/40	29/33	93/93	38/38	40/40	32/35	95/95	-	-	-	-	-
			105A	12.0/16.0	33.4/38.5	58/58	60/60	47/53	93/93	60/60	60/60	49/55	95/95	-	-	-	-	-
208/230-3-60			104B+104B	15.8/21.0	43.8/50.5	73/73	80/80	59/67	75/75	80/80	61/69	95/95	-	-	-	-	-	
			NONE	-	-	24	30	23	105	26	30	26	107	-	-	-	-	
			102A	4.9/6.5	13.6/15.6	26/26	30/30	23/24	105/105	28/28	30/30	26/26	107/107	-	-	-	-	
			103B	6.5/8.7	18.1/20.9	33/33	35/35	27/30	105/105	35/35	40/40	29/32	107/107	-	-	-	-	
			105A	12.0/16.0	33.4/38.5	55/55	60/60	44/50	105/105	57/57	60/60	47/52	107/107	-	-	-	-	
			104B+104B	15.8/21.0	43.8/50.5	70/70	70/70	56/64	105/105	72/72	80/80	59/66	107/107	-	-	-	-	
			NONE	-	-	24/24	30/30	23/23	122	26/26	30/30	26/25	124	-	-	-	-	
			102A	4.9/6.5	13.6/15.6	26/26	30/30	23/24	122/122	28/28	30/30	26/26	124/124	-	-	-	-	
			103B	6.5/8.7	18.1/20.9	33/33	35/35	27/30	122/122	35/35	40/40	29/32	124/124	-	-	-	-	
			105A	12.0/16.0	33.4/38.5	55/55	60/60	44/50	122/122	57/57	60/60	47/52	124/124	-	-	-	-	
208/230-1-60			104B+104B	15.8/21.0	43.8/50.5	70/70	70/70	56/64	72/72	80/80	59/66	124/124	-	-	-	-	-	
			NONE	-	-	27/27	40/40	27/27	158	28/29	40/40	29/29	160	-	-	-	-	
			102A	4.9/6.5	13.6/15.6	30/30	30/30	27/27	158/158	33/33	40/40	29/30	160/160	-	-	-	-	
			103B	6.5/8.7	18.1/20.9	37/37	40/40	30/34	158/158	38/39	40/40	33/36	160/160	-	-	-	-	
			105A	12.0/16.0	33.4/38.5	59/59	60/60	48/54	158/158	61/61	70/70	50/56	160/160	-	-	-	-	
			104B+104B	15.8/21.0	43.8/50.5	74/74	80/80	60/68	158/158	76/76	80/80	62/70	160/160	-	-	-	-	
			NONE	-	-	27/27	40/40	27/27	163	33/32	45/45	33/32	163	-	-	-	-	
			102A	4.9/6.5	13.6/15.6	30/30	30/30	27/27	163/163	36/36	45/45	33/33	163/163	-	-	-	-	
			103B	6.5/8.7	18.1/20.9	37/37	40/40	30/34	163/163	43/43	45/45	36/39	163/163	-	-	-	-	
			105A	12.0/16.0	33.4/38.5	59/59	60/60	48/54	163/163	65/65	70/70	54/59	163/163	-	-	-	-	

See "Legend and Notes for Tables 72 - 75" on page 141

ELECTRICAL INFORMATION

Table 73 - UNIT WIRE SIZING DATA WITH FACTORY INSTALLED HACR BREAKER WITH SINGLE SPEED INDOOR FAN MOTOR (cont)

UNIT	NOM. V-PH-HZ	ELEC. HTR			NO C.O. or UNPWR C.O.						w/ PWRD C.O.												
		IFM TYPE	CRHEATER***A00	Nom (kW)	FLA	NO PE.			w/ P.E. (pwrdr fr/unit)			NO PE.			w/ P.E. (pwrdr fr/unit)								
						MCA	HACR BRKR	FLA	DISC. SIZE	LRA	MCA	HACR BRKR	FLA	DISC. SIZE	LRA	MCA	HACR BRKR	FLA	DISC. SIZE	LRA			
50HC*A05	460-3-60	DD-STD	NONE	-	-	13	47	14	20	14	48	15	20	15	49	16	20	16	20	16	50		
			108A	6.0	7.2	13	47	16	20	14	48	17	20	15	49	18	20	17	20	17	50		
			108A	11.5	13.8	23	25	22	25	24	23	25	24	25	25	24	27	30	25	24	30	24	50
		STD	108A	14.0	16.8	26	30	24	47	28	30	25	48	29	30	26	49	30	30	30	28	50	
			108A+108A	23.0	27.7	40	40	36	47	41	45	48	43	45	45	39	49	44	45	40	40	50	
			NONE	-	-	12	11	52	13	53	14	15	53	14	20	14	54	15	20	15	20	15	55
	575-3-60	DD-STD	108A	6.0	7.2	13	61	14	15	15	12	62	14	15	14	63	15	20	15	20	15	64	
			108A	11.5	13.8	21	25	19	61	22	25	20	62	24	25	21	63	25	25	25	22	64	
			108A	14.0	16.8	25	25	22	61	26	30	23	62	27	30	25	63	29	30	26	26	64	
		STD	108A+108A	23.0	27.7	38	40	35	61	39	40	62	41	45	45	37	63	42	45	39	38	64	
			NONE	-	-	12	11	61	13	62	14	15	62	14	15	14	63	15	20	15	20	15	64
			108A	6.0	7.2	13	15	79	13	79	14	20	80	16	20	16	81	17	20	17	20	17	82
HIGH	DD-STD	108A	11.5	13.8	23	25	21	79	24	25	80	26	30	23	81	27	30	24	30	24	82		
		108A	14.0	16.8	27	30	24	79	28	30	25	80	29	30	27	81	31	35	28	28	82		
		108A+108A	23.0	27.7	40	40	37	79	42	45	80	43	45	39	81	44	45	40	40	40	82		
	STD	NONE	-	-	11	11	39	13	41	15	13	41	13	15	41	15	20	15	20	15	43		
		297A	9.2	9.2	17	20	15	39	19	20	17	41	19	20	17	41	21	25	19	25	19	43	
		298A	13.8	13.8	23	25	20	39	25	25	23	41	25	25	22	41	27	30	25	30	25	43	
MED	NONE	-	-	9	8	42	10	44	15	10	44	10	15	44	12	15	15	12	15	12	46		
	297A	9.2	9.2	13	15	42	16	44	20	14	44	16	20	14	44	18	20	16	20	16	46		
	298A	13.8	13.8	19	20	17	42	22	25	19	44	21	25	19	44	24	25	21	21	21	46		
HIGH	NONE	-	-	9	8	42	11	44	15	11	44	11	15	44	13	15	15	13	15	13	46		
	297A	9.2	9.2	14	15	42	16	44	20	15	44	16	20	14	44	18	20	17	20	17	46		
	298A	13.8	13.8	20	20	18	42	22	25	20	44	22	25	20	44	24	25	22	22	22	46		

See "Legend and Notes for Tables 72 - 75" on page 141

ELECTRICAL INFORMATION

Table 73 - UNIT WIRE SIZING DATA WITH FACTORY INSTALLED HACR BREAKER WITH SINGLE SPEED INDOOR FAN MOTOR (cont)

UNIT	NOM. V-PH-HZ	ELEC. HTR			NO PE.				NO C.O. or UNPWR C.O.				w/ PWRD C.O.				
		IFM TYPE	CRHEATER**A00	Nom (kW)	FLA	MCA	HACR BRKR	DISC. SIZE		MCA	HACR BRKR	DISC. SIZE		MCA	HACR BRKR	DISC. SIZE	
								FLA	LRA			FLA	LRA			FLA	LRA
50HC*A06	460-3-60	DD-STD	NONE	-	-	14	20	14	58	15	20	15	59	16	20	16	60
			108A	6.0	7.2	14	20	14	58	15	20	15	59	16	20	16	60
			108A	11.5	13.8	23	25	24	58	22	25	24	59	23	25	24	59
			108A	14.0	16.8	26	30	24	58	28	28	30	25	59	29	30	26
			108A+108A	23.0	27.7	40	40	36	58	41	45	45	38	59	43	45	40
		108A+108A	25.5	30.7	44	45	40	58	45	45	45	41	59	47	50	44	
		STD	NONE	-	-	13	15	12	63	14	20	13	64	15	20	15	65
			108A	6.0	7.2	13	15	12	63	14	20	13	64	15	20	15	65
			108A	11.5	13.8	21	25	19	63	22	25	20	64	24	25	23	
			108A	14.0	16.8	25	25	22	63	26	30	27	64	27	30	26	
108A+108A	23.0		27.7	38	40	35	63	40	40	36	64	41	45	39			
50HC*A06	460-3-60	MED	108A+108A	25.5	30.7	43	45	39	64	45	45	39	64	45	45	42	
			NONE	-	-	14	20	13	82	15	20	14	83	16	20	16	
			108A	6.0	7.2	14	20	13	82	15	20	14	83	16	20	17	
			108A	11.5	13.8	22	25	20	82	23	25	21	83	25	25	23	
			108A	14.0	16.8	26	30	23	82	27	30	24	83	28	30	27	
		HIGH	108A+108A	23.0	27.7	39	40	36	82	41	45	37	83	42	45	39	
			108A+108A	25.5	30.7	43	45	39	82	44	45	40	83	46	50	43	
			NONE	-	-	14	20	14	90	15	20	15	91	17	20	18	
			108A	6.0	7.2	15	20	14	90	16	20	15	91	17	20	18	
			108A	11.5	13.8	23	25	21	90	24	25	22	91	26	30	24	
575-3-60	DD-STD	108A	14.0	16.8	27	30	24	90	28	30	25	91	29	31	28		
		108A+108A	23.0	27.7	40	40	37	90	42	45	38	91	43	45	40		
		108A+108A	25.5	30.7	44	45	40	90	45	45	41	91	47	50	44		
		NONE	-	-	12	15	12	46	14	15	14	48	13	15	16		
		298A	13.8	13.8	23	25	20	46	25	25	23	48	25	25	25		
	STD	301A	23.0	23.1	34	35	31	46	37	40	33	48	36	40	35		
		NONE	-	-	9	15	8	49	11	15	10	51	11	15	12		
		298A	13.8	13.8	19	20	17	49	22	25	19	51	21	25	21		
		301A	23.0	23.1	31	35	28	49	33	35	30	51	33	35	32		
		NONE	-	-	10	15	9	53	12	15	11	55	11	15	13		
MED	298A	13.8	13.8	20	20	18	53	23	25	20	55	22	25	22			
	301A	23.0	23.1	32	35	29	53	34	35	31	55	34	35	33			
	NONE	-	-	11	15	10	64	12	15	12	66	12	15	14			
	298A	13.8	13.8	21	25	19	64	24	25	21	66	23	25	23			
	301A	23.0	23.1	33	35	30	64	35	35	32	66	35	35	34			

See "Legend and Notes for Tables 72 - 75" on page 141

ELECTRICAL INFORMATION
Table 73 - UNIT WIRE SIZING DATA WITH FACTORY INSTALLED HACR BREAKER WITH SINGLE SPEED INDOOR FAN MOTOR (cont)
(Units Produced On or After 02/16/2015)

UNIT	NO M. V-PH-HZ	IFM TYPE	ELEC. HTR			NO C.O. or UNPWR C.O.										w/ PWRD C.O.									
			CRHEATER ***A00	Nom (kW)	FLA	NO PE.			w/ P.E. (pwrd fr/unit)			NO PE.			w/ P.E. (pwrd fr/unit)			NO PE.			w/ P.E. (pwrd fr/unit)				
						MCA	HACR BRKR	DISC. SIZE		MCA	HACR BRKR	DISC. SIZE		MCA	HACR BRKR	DISC. SIZE		MCA	HACR BRKR	DISC. SIZE					
								FLA	LRA			FLA	LRA			FLA	LRA			FLA	LRA				
50HC-A07		STD	NONE	-	-	33/33	50/50	32/32	178	37/37	50/50	36/36	182	38/38	50/50	37/37	183	42/42	60/60	42/42	60/60	42/42	187		
			264A	4.9/6.5	13.6/15.6	33/33	50/50	32/32	178/178	37/37	50/50	36/36	182/182	38/38	50/50	37/37	183/183	42/42	60/60	42/42	60/60	42/42	187/187		
			117A	7.8/10.4	21.7/25.0	38/38	50/50	32/34	178/178	43/43	50/50	36/39	182/182	44/44	50/50	37/40	183/183	49/49	60/60	42/44	60/60	42/44	187/187		
			110A	12.0/16.0	33.4/38.5	55/55	60/60	44/50	178/178	59/59	60/60	49/54	182/182	61/61	70/70	50/55	183/183	65/65	70/70	54/60	70/70	54/60	187/187		
			117A+117A	15.8/21.0	43.8/50.5	70/70	70/70	58/64	178/178	74/74	80/80	61/68	182/182	76/76	80/80	62/69	183/183	80/80	66/74	90/90	66/74	90/90	66/74	187/187	
			110A+117A	19.9/26.5	55.2/63.8	86/86	90/90	69/79	178/178	91/91	100/100	74/83	182/182	92/92	100/100	75/85	183/183	97/97	100/100	79/89	100/100	79/89	100/100	187/187	
		MED	NONE	-	-	36/36	50/50	36/36	214	40/40	50/50	40/40	218	41/41	219	45/45	60/60	41/41	219	45/45	60/60	45/45	60/60	46/45	223
			264A	4.9/6.5	13.6/15.6	36/36	50/50	36/36	214/214	40/40	50/50	40/40	218/218	41/41	219/219	45/45	60/60	41/41	219/219	45/45	60/60	45/45	60/60	46/45	223/223
			117A	7.8/10.4	21.7/25.0	42/42	50/50	36/38	214/214	47/47	50/50	40/43	218/218	48/48	219/219	53/53	60/60	41/44	219/219	53/53	60/60	46/48	60/60	46/48	223/223
			110A	12.0/16.0	33.4/38.5	59/59	60/60	48/54	214/214	64/64	70/70	52/58	218/218	65/65	219/219	70/70	54/59	219/219	70/70	58/64	70/70	58/64	70/70	58/64	223/223
			117A+117A	15.8/21.0	43.8/50.5	74/74	80/80	60/68	214/214	79/79	80/80	64/72	218/218	80/80	219/219	85/85	90/90	66/73	219/219	85/85	90/90	70/78	70/78	70/78	223/223
			110A+117A	19.9/26.5	55.2/63.8	91/91	100/100	73/83	214/214	95/95	100/100	78/87	218/218	97/97	100/100	79/88	100/100	101/101	219/219	83/93	110/110	101/101	110/110	83/93	223/223
HIGH	NONE	-	-	42/42	60/60	42/41	230	45/45	60/60	46/45	234	46/46	235	47/46	60/60	47/46	235	50/50	50/50	50/50	52/50	239			
	264A	4.9/6.5	13.6/15.6	42/42	60/60	42/41	230/230	45/45	60/60	46/45	234/234	46/46	235/235	47/46	60/60	47/46	235/235	50/50	50/50	50/50	52/50	239/239			
	117A	7.8/10.4	21.7/25.0	48/48	60/60	42/43	230/230	52/52	60/60	46/48	234/234	48/48	234/234	47/49	60/60	47/49	235/235	58/58	60/60	52/53	60/60	52/53	239/239		
	110A	12.0/16.0	33.4/38.5	64/64	70/70	54/59	230/230	69/69	70/70	58/63	234/234	70/70	234/234	60/64	80/70	60/64	235/235	75/75	80/80	64/69	80/80	64/69	239/239		
	117A+117A	15.8/21.0	43.8/50.5	79/79	80/80	66/73	230/230	84/84	90/90	70/77	234/234	85/85	234/234	72/78	90/90	72/78	235/235	90/90	76/83	90/90	76/83	239/239			
	110A+117A	19.9/26.5	55.2/63.8	96/96	100/100	79/88	230/230	101/101	100/100	83/92	234/234	102/102	234/234	85/93	110/110	102/102	235/235	110/110	89/98	110/110	89/98	239/239			
460-3-60		STD	NONE	-	-	15	20	14	88	17	20	16	90	17	20	17	90	19	25	19	25	19	92		
			265A	6.0	7.2	15	20	14	88	17	20	16	90	17	20	17	90	19	25	19	25	19	92		
			268A	11.5	13.8	21	25	19	88	23	25	21	88	24	25	21	88	26	30	26	30	26	92		
			267A	14.0	16.8	25	25	22	88	27	30	24	90	27	90	25	30	27	90	30	30	27	92		
			268A	23.0	27.7	38	40	35	88	40	45	37	90	37	90	41	45	37	90	43	45	39	92		
			269A	25.5	30.7	42	45	38	88	44	45	40	40	42	90	41	45	41	45	45	45	43	45	92	
		MED	NONE	-	-	17	20	16	106	18	25	18	108	18	108	19	25	19	108	21	25	21	110		
			265A	6.0	7.2	17	20	16	106/106	18	25	18	108/108	19	108	19	25	19	108	21	25	21	110		
			268A	11.5	13.8	23	25	21	106	25	25	23	108	26	108	23	30	23	108	28	30	25	110		
			267A	14.0	16.8	27	30	24	106	29	30	26	108	29	108	27	30	27	108	32	35	29	110		
			268A	23.0	27.7	40	40	37	106	43	45	39	108	43	108	39	45	39	108	45	45	41	110		
			269A	25.5	30.7	44	45	40	106	46	50	42	108	47	108	43	50	43	108	49	50	45	110		
575-3-60		STD	NONE	-	-	12	15	11	66	15	20	15	70	13	15	68	17	20	17	20	17	72			
			118A	17.0	20.4	28	30	25	66	33	35	30	70	27	68	35	30	72	35	35	32	32	72		
			298A	25.7	25.8	35	35	32	66	39	40	36	70	37	68	42	45	38	42	45	38	42	72		
			NONE	-	-	13	15	12	81	17	20	17	85	14	83	18	20	19	87	20	19	87	87		
			118A	17.0	20.4	29	30	27	81	34	35	31	85	32	83	36	40	33	83	36	40	33	87		
			298A	25.7	25.8	36	40	33	81	41	45	37	85	38	83	43	45	39	83	43	45	39	87		
		HIGH	NONE	-	-	16	20	15	95	19	25	20	99	17	97	21	25	20	97	21	25	22	101		
			118A	17.0	20.4	33	35	30	95	38	40	34	99	35	97	40	40	36	97	40	40	36	101		
			298A	25.7	25.8	40	40	36	95	44	45	40	99	42	97	47	50	42	97	47	50	42	101		

ELECTRICAL INFORMATION

Table 73 - UNIT WIRE SIZING DATA WITH FACTORY INSTALLED HACR BREAKER WITH SINGLE SPEED INDOOR FAN MOTOR (cont)

(Units Produced On or Prior to 02/15/2015)

UNIT	NOM. V-Ph-HZ	IFM TYPE	ELEC. HTR			NO C.O. or UNPWR C.O.						w/ PWRD C.O.								
			CRHEATER***A00	Nom (kW)	FLA	NO PE.			w/ P.E. (pwrd fr/unit)			NO PE.			w/ P.E. (pwrd fr/unit)					
						MCA	HACR BRKR	DISC. SIZE FLA LRA	MCA	HACR BRKR	DISC. SIZE FLA LRA	MCA	HACR BRKR	DISC. SIZE FLA LRA	MCA	HACR BRKR	DISC. SIZE FLA LRA			
50HC+A07	208/230-3-60	STD	NONE	-	-	32/32	50/50	31/31	165	36/35	169	37/37	50/50	37/36	170	41/41	50/50	41/41	174	
			264A	4.9/6.5	13.6/15.6	32/32	50/50	31/31	165/165	36/35	169/169	37/37	50/50	37/36	170/170	41/41	50/50	41/41	174/174	
			117A	7.8/10.4	21.7/25.0	38/38	50/50	31/34	165/165	43/43	36/39	169/169	44/44	50/50	37/40	170/170	49/49	50/50	41/44	174/174
			110A	12.0/16.0	33.4/38.5	55/55	60/60	44/50	165/165	59/59	49/54	169/169	61/61	70/70	50/55	170/170	65/65	70/70	54/60	174/174
			117A+117A	15.8/21.0	43.8/50.5	70/70	70/70	56/64	165/165	74/74	61/68	169/169	76/76	80/80	62/69	170/170	80/80	90/90	66/74	174/174
			110A+117A	19.9/26.5	55.2/63.8	86/86	90/90	69/79	165/165	91/91	74/83	169/169	92/92	100/100	75/85	170/170	97/97	100/100	79/89	174/174
	460-3-60	MED	264A	4.9/6.5	13.6/15.6	36/36	50/50	35/35	201	39/39	205	40/40	206	44/44	206	45/45	210	45/45	210	
			117A	7.8/10.4	21.7/25.0	36/36	50/50	35/35	201/201	39/39	205/205	40/40	206/206	44/44	206/206	45/45	210/210	45/45	210/210	
			110A	12.0/16.0	33.4/38.5	59/59	60/60	48/54	201/201	64/64	52/58	205/205	65/65	70/70	54/59	206/206	58/64	70/70	58/64	
			117A+117A	15.8/21.0	43.8/50.5	74/74	80/80	60/68	201/201	79/79	64/72	205/205	80/80	80/80	66/73	206/206	85/85	90/90	70/78	
			110A+117A	19.9/26.5	55.2/63.8	91/91	100/100	73/83	201/201	95/95	78/87	205/205	97/97	100/100	79/88	206/206	101/101	110/110	83/93	
			NONE	-	-	41/41	50/50	41/40	217	45/45	221	46/46	222	49/49	46/45	222	49/49	60/60	51/50	226
	575-3-60	HIGH	266A	6.0	7.2	17	25	16	84	18	86	19	25	18	86	21	25	20	88	
			266A	11.5	13.8	21	25	19	84	23	21	86	24	25	21	86	26	30	23	
			267A	14.0	16.8	25	25	22	84	27	30	24	24	30	24	86	27	30	27	
			268A	23.0	27.7	38	40	35	84	40	37	37	45	45	37	86	43	45	39	
			269A	25.5	30.7	42	45	38	84	44	40	38	44	45	40	86	45	50	43	
			NONE	-	-	18	25	18	102	20	20	104	21	25	20	104	22	30	22	
50HC+A07	460-3-60	STD	266A	6.0	7.2	18	25	18	84	18	86	19	25	18	86	21	25	20	88	
			266A	11.5	13.8	23	25	21	102	25	23	104	26	30	23	104	28	30	25	
			267A	14.0	16.8	27	30	24	102	29	26	104	29	30	27	104	32	35	29	
			268A	23.0	27.7	40	40	37	102	43	39	104	43	45	39	104	45	45	41	
			269A	25.5	30.7	44	45	40	102	46	42	104	47	50	43	104	49	50	45	
			NONE	-	-	21	25	20	110	22	22	112	23	30	23	112	25	30	25	
	575-3-60	MED	266A	6.0	7.2	18	25	18	84	18	86	19	25	18	86	21	25	20	88	
			266A	11.5	13.8	23	25	21	102	25	23	104	26	30	23	104	28	30	25	
			267A	14.0	16.8	27	30	24	102	29	26	104	29	30	27	104	32	35	29	
			268A	23.0	27.7	43	45	39	110	45	41	112	46	50	42	112	48	50	44	
			269A	25.5	30.7	47	50	43	110	49	45	112	50	50	45	112	52	50	47	
			NONE	-	-	13	15	12	61	16	16	65	14	20	14	63	18	20	18	
	575-3-60	HIGH	266A	6.0	7.2	18	25	18	84	18	86	19	25	18	86	21	25	20	88	
			266A	11.5	13.8	23	25	21	102	25	23	104	26	30	23	104	28	30	25	
			267A	14.0	16.8	27	30	24	102	29	26	104	29	30	27	104	32	35	29	
			268A	23.0	27.7	43	45	39	110	45	41	112	46	50	42	112	48	50	44	
			269A	25.5	30.7	47	50	43	110	49	45	112	50	50	45	112	52	50	47	
			NONE	-	-	14	20	13	76	18	17	80	15	20	15	78	19	25	19	
575-3-60	HIGH	266A	6.0	7.2	18	25	18	84	18	86	19	25	18	86	21	25	20	88		
		266A	11.5	13.8	23	25	21	102	25	23	104	26	30	23	104	28	30	25		
		267A	14.0	16.8	27	30	24	102	29	26	104	29	30	27	104	32	35	29		
		268A	23.0	27.7	43	45	39	110	45	41	112	46	50	42	112	48	50	44		
		269A	25.5	30.7	47	50	43	110	49	45	112	50	50	45	112	52	50	47		
		NONE	-	-	17	20	16	90	20	18	94	18	25	18	92	22	25	23		

See "Legend and Notes for Tables 72 - 75" on page 141

ELECTRICAL INFORMATION

Table 73 - UNIT WIRE SIZING DATA WITH FACTORY INSTALLED HACR BREAKER WITH SINGLE SPEED INDOOR FAN MOTOR (cont)

UNIT	ELEC. HTR			NO C.O. or UNPWR C.O.												w/ PWRD C.O.													
	IFM TYPE	CRHEATER**A00	Nom (kW)	FLA	NO P.E.				w/ P.E. (p.wrd fr/unit)				NO P.E.				w/ P.E. (p.wrd fr/unit)												
					MCA	HACR BRKR	FLA	DISC. SIZE	MCA	HACR BRKR	FLA	DISC. SIZE	MCA	HACR BRKR	FLA	DISC. SIZE	MCA	HACR BRKR	FLA	DISC. SIZE									
50HC+D08	STD	NONE	-	-	39/39	50/50	41/40	208	43/43	50/50	45/45	212	44/44	50/50	46/46	213	48/48	60/60	51/50	217	51/50	60/60	46/46	213/213	49/49	60/60	51/50	217/217	
		117A	7.8/10.4	21.7/25.0	39/39	50/50	41/40	208/208	43/43	50/50	45/45	212/212	44/44	50/50	46/46	213/213	49/49	60/60	51/50	217/217	51/50	60/60	46/46	213/213	49/49	60/60	51/50	217/217	
		110A	12.0/16.0	33.4/38.5	55/55	60/60	44/50	208/208	59/59	60/60	49/54	212/212	61/61	70/70	50/55	213/213	65/65	70/70	54/60	217/217	54/60	70/70	50/55	213/213	65/65	70/70	54/60	217/217	
		111A	18.6/24.8	51.7/59.7	81/81	90/90	65/74	208/208	86/86	90/90	70/79	212/212	87/87	90/90	71/80	213/213	92/92	100/100	75/84	217/217	75/84	100/100	88/100	213/213	114/114	125/125	93/104	217/217	
		112A	24.0/32.0	66.7/77.0	103/103	110/110	83/94	208/208	108/108	110/110	87/99	212/212	109/109	110/110	88/100	213/213	114/114	125/125	104	217/217	93/104	125/125	110/110	113/128	213/213	145/145	151/150	118/133	217/217
		112A+117A	31.8/42.4	88.4/102.0	134/134	150/150	108/123	208/208	139/139	150/150	112/127	212/212	140/140	150/150	113/128	213/213	145/145	150/150	118/133	217/217	118/133	150/150	113/128	213/213	145/145	150/150	118/133	217/217	
	MED	NONE	-	-	41/41	50/50	43/42	229	45/45	50/50	47/47	233	46/46	50/50	48/48	234	50/50	53/52	238	53/52	238	60/60	48/48	234	50/50	53/52	238	53/52	238
		117A	7.8/10.4	21.7/25.0	41/41	50/50	43/42	229/229	45/45	50/50	47/47	233/233	46/46	50/50	48/48	234	51/51	51/51	238/238	53/52	238/238	60/60	48/48	234/234	51/51	53/52	238/238	53/52	238/238
		110A	12.0/16.0	33.4/38.5	57/57	60/60	46/52	229/229	62/62	70/70	51/56	233/233	63/63	70/70	52/58	234/234	68/68	70/70	56/62	238/238	56/62	238/238	70/70	52/58	234/234	68/68	70/70	56/62	238/238
		111A	18.6/24.8	51.7/59.7	83/83	90/90	67/76	229/229	89/89	90/90	72/81	233/233	89/89	90/90	73/82	234/234	94/94	100/100	77/86	238/238	77/86	238/238	100/100	73/82	234/234	94/94	100/100	77/86	238/238
		112A	24.0/32.0	66.7/77.0	105/105	110/110	85/96	229/229	110/110	110/110	89/101	233/233	111/111	125/125	90/102	234/234	116/116	125/125	95/106	238/238	95/106	238/238	125/125	90/102	234/234	116/116	125/125	95/106	238/238
		112A+117A	31.8/42.4	88.4/102.0	136/136	150/150	110/125	229/229	141/141	150/150	114/129	233/233	142/142	150/150	115/131	234/234	147/147	150/150	119/135	238/238	119/135	238/238	150/150	115/131	234/234	147/147	150/150	119/135	238/238
460-3-60	STD	NONE	-	-	18	20	19	104	20	25	106	21	20	25	106	21	20	25	108	23	23	20	21	106	22	20	25	108	
		116A	13.9	16.7	24	25	22	104	27	30	106	24	24	27	30	106	26	29	30	27	108	28	25	106	26	29	30	27	108
		119A	16.5	19.8	28	30	26	104	31	35	28	106	31	35	35	106	33	35	35	30	108	35	28	106	33	35	35	30	108
		114A	27.8	33.4	45	45	41	104	48	50	43	106	48	50	50	106	50	50	50	46	108	50	44	106	50	50	50	46	108
		115A	33.0	39.7	53	60	49	104	55	60	51	106	56	60	60	106	58	60	60	53	108	60	51	106	58	60	60	53	108
		114A+116A	41.7	50.2	66	70	61	104	69	70	63	106	70	70	70	106	71	80	80	65	108	80	63	106	71	80	80	65	108
	MED	NONE	-	-	19	25	20	114	21	25	116	22	21	25	116	23	25	23	25	118	24	24	21	116	23	25	23	25	
		116A	13.9	16.7	26	30	23	114	28	30	116	25	24	28	30	116	26	28	28	24	118	28	22	116	26	28	28	24	118
		119A	16.5	19.8	29	30	27	114	32	35	29	116	32	35	35	116	34	35	35	31	118	35	29	116	34	35	35	31	118
		114A	27.8	33.4	46	50	42	114	49	50	44	116	49	50	50	116	51	51	50	47	118	51	44	116	51	51	50	47	118
		115A	33.0	39.7	54	60	50	114	57	60	52	116	57	60	60	116	59	60	60	54	118	60	52	116	59	60	60	54	118
		114A+116A	41.7	50.2	67	70	62	114	64	70	64	116	64	70	70	116	72	80	80	66	118	72	64	116	72	80	80	66	118
575-3-60	STD	NONE	-	-	13	15	13	77	17	20	81	14	14	15	81	14	14	15	83	19	19	14	81	18	15	19	19		
		118A	17.0	20.4	28	30	25	77	33	30	81	30	30	30	30	81	30	30	30	27	83	35	27	79	35	32	32	83	
		119A	34.0	40.9	54	60	49	77	58	60	53	81	56	60	60	81	56	60	60	55	83	70	51	79	70	55	55	83	
		NONE	-	-	13	15	13	81	17	20	85	15	15	20	20	85	15	15	20	87	19	19	15	83	15	20	20	87	
		118A	17.0	20.4	28	30	26	81	33	30	85	31	30	30	30	85	31	30	30	28	87	35	28	83	35	32	32	87	
		119A	34.0	40.9	54	60	49	81	61	60	54	85	56	60	60	85	56	60	60	56	87	70	51	83	61	70	56	87	
	HIGH	NONE	-	-	14	15	14	92	18	20	96	16	16	20	96	16	16	20	98	21	21	14	96	16	16	20	21	98	
		118A	17.0	20.4	29	30	27	92	34	35	31	96	32	35	35	96	32	35	35	29	98	40	29	94	36	33	33	98	
		119A	34.0	40.9	55	60	50	92	60	60	55	96	57	60	60	96	57	60	60	57	98	70	52	94	62	57	57	98	

See "Legend and Notes for Tables 72 - 75" on page 141

ELECTRICAL INFORMATION

Table 73 - UNIT WIRE SIZING DATA WITH FACTORY INSTALLED HACR BREAKER WITH SINGLE SPEED INDOOR FAN MOTOR (cont)

UNIT	IFM TYPE	ELEC. HTR			NO C.O. or UNPWR C.O.									w/ PWR C.O.									
		CHRHEATER***A00	Nom (kW)	FLA	NO PE.			w/ P.E. (pwrd fr/unit)			NO PE.			w/ P.E. (pwrd fr/unit)			NO PE.			w/ P.E. (pwrd fr/unit)			
					MCA	HACR BRKR	FLA	DISC. SIZE	MCA	HACR BRKR	FLA	DISC. SIZE	MCA	HACR BRKR	FLA	DISC. SIZE	MCA	HACR BRKR	FLA	DISC. SIZE	MCA	HACR BRKR	FLA
FLA	LRA	LRA	FLA	LRA	LRA	FLA	LRA	FLA	LRA	FLA	LRA	FLA	LRA	FLA	LRA	FLA	LRA	FLA	LRA	FLA	LRA		
50HC+D09	STD	NONE	—	—	39/39	50/50	41/41	208	43/43	43/43	50/50	45/45	212	44/44	44/44	50/50	46/46	213	48/48	48/48	60/60	51/50	217
		117A	7.8/10.4	21.7/25.0	39/39	50/50	41/41	208/208	43/43	43/43	50/50	45/45	212/212	44/44	44/44	50/50	46/46	213/213	49/49	49/49	60/60	51/50	217/217
		110A	12.0/16.0	33.4/38.5	55/55	60/60	44/50	208/208	58/59	59/59	60/60	49/54	212/212	61/61	61/61	70/70	50/55	213/213	65/65	65/65	70/70	54/60	217/217
		111A	18.6/24.8	51.7/59.7	81/81	90/90	69/74	208/208	86/86	86/86	90/90	70/79	212/212	87/87	87/87	90/90	71/80	213/213	92/92	92/92	100/100	75/84	217/217
		112A	24.0/32.0	66.7/77.0	103/103	110/110	83/94	208/208	108/108	108/108	110/110	87/99	212/212	109/109	109/109	110/110	88/100	213/213	114/114	114/114	125/125	93/104	217/217
	208/230-3-60	112A+117A	31.8/42.4	88.4/102.0	134/134	150/150	108/123	208/208	139/139	139/139	150/150	112/127	212/212	140/140	140/140	150/150	113/128	213/213	145/145	145/145	150/150	118/133	217/217
	MED	NONE	—	—	41/41	50/50	43/43	229	43/43	43/43	50/50	47/47	233	46/46	46/46	50/50	48/48	234	50/50	50/50	60/60	53/53	238
		117A	7.8/10.4	21.7/25.0	41/41	50/50	43/43	229/229	43/43	43/43	50/50	47/47	233/233	46/46	46/46	50/50	48/48	234/234	51/51	51/51	60/60	53/53	238/238
		110A	12.0/16.0	33.4/38.5	57/57	60/60	46/52	229/229	62/62	62/62	70/70	51/56	233/233	63/63	63/63	70/70	52/58	234/234	68/68	68/68	70/70	56/62	238/238
		111A	18.6/24.8	51.7/59.7	83/83	90/90	67/76	229/229	88/88	88/88	90/90	72/81	233/233	89/89	89/89	90/90	73/82	234/234	94/94	94/94	100/100	77/86	238/238
		112A	24.0/32.0	66.7/77.0	105/105	110/110	85/96	229/229	110/110	110/110	110/110	89/101	233/233	111/111	111/111	111/111	90/102	234/234	116/116	116/116	125/125	95/106	238/238
	208/230-3-60	112A+117A	31.8/42.4	88.4/102.0	136/136	150/150	110/125	229/229	141/141	141/141	150/150	114/129	233/233	142/142	142/142	150/150	115/131	234/234	147/147	147/147	150/150	119/135	238/238
	HIGH	NONE	—	—	45	50	47	258	45	45	60	52	262	50	50	60	53	263	53	53	60	57	267
		117A	7.8/10.4	21.7/25.0	45/45	50/50	47/47	258/258	45/45	45/45	60/60	52/52	262/262	51/51	51/51	60/60	53/53	263/263	56/56	56/56	60/60	57/57	267/267
		110A	12.0/16.0	33.4/38.5	62/62	70/70	51/56	258/258	67/67	67/67	70/70	55/61	262/262	68/68	68/68	70/70	56/62	263/263	73/73	73/73	80/80	60/66	267/267
111A		18.6/24.8	51.7/59.7	88/88	90/90	72/81	258/258	93/93	93/93	100/100	76/85	262/262	94/94	94/94	100/100	77/86	263/263	99/99	99/99	100/100	82/91	267/267	
112A		24.0/32.0	66.7/77.0	110/110	110/110	89/101	258/258	115/115	115/115	125/125	93/105	262/262	116/116	116/116	125/125	94/106	263/263	121/121	121/121	125/125	98/111	267/267	
50HC+D09	112A+117A	31.8/42.4	88.4/102.0	141/141	150/150	114/129	258/258	146/146	146/146	150/150	118/134	262/262	147/147	147/147	150/150	119/135	263/263	152/152	152/152	175/175	124/139	267/267	
460-3-60	STD	NONE	—	—	19	20	104	19	19	25	21	106	21	21	25	22	106	23	23	25	24	108	
		116A	13.9	16.7	24	25	104	104	104	104	27	24	106	27	27	30	25	106	29	29	30	108	
		113A	16.5	19.8	28	30	104	104	104	104	31	28	106	31	31	35	28	106	33	33	35	108	
		114A	27.8	33.4	45	45	104	104	104	104	48	43	106	48	48	50	44	106	50	50	50	108	
		115A	33.0	39.7	53	60	49	104	55	55	60	51	106	56	56	60	51	106	58	58	60	53	108
	114A+116A	41.7	50.2	66	70	61	104	69	69	70	63	106	69	69	70	63	106	71	71	80	65	108	
	MED	NONE	—	—	19	25	114	19	19	25	25	22	116	22	22	25	23	116	23	23	25	25	118
		116A	13.9	16.7	26	30	114	114	114	114	28	25	116	28	28	30	26	116	31	31	35	28	118
		113A	16.5	19.8	29	30	114	114	114	114	32	29	116	32	32	35	29	116	34	34	35	31	118
		114A	27.8	33.4	46	50	114	114	114	114	49	44	116	49	49	50	45	116	51	51	60	47	118
		115A	33.0	39.7	54	60	50	114	57	57	60	52	116	57	57	60	52	116	59	59	60	54	118
	460-3-60	114A+116A	41.7	50.2	67	70	62	114	64	64	70	64	116	70	70	64	116	72	72	80	66	118	
	HIGH	NONE	—	—	21	25	129	21	21	25	25	24	131	24	24	25	25	131	25	25	30	27	133
		116A	13.9	16.7	26	30	129	129	129	129	30	27	131	30	30	35	28	131	33	33	35	30	133
		113A	16.5	19.8	32	35	129	129	129	129	34	31	131	35	35	35	31	131	37	37	40	33	133
114A		27.8	33.4	49	50	129	129	129	129	51	45	131	52	52	60	47	131	54	54	60	49	133	
115A		33.0	39.7	57	60	52	129	59	59	60	54	131	59	59	60	54	131	62	62	70	56	133	
460-3-60	114A+116A	41.7	50.2	67	70	64	129	66	66	70	66	131	73	73	80	66	131	75	75	80	68	133	
STD	NONE	—	—	14	15	77	14	14	15	18	19	81	16	16	20	20	79	20	20	25	21	83	
	118A	17.0	20.4	28	30	77	77	77	77	33	30	81	30	30	30	27	79	35	35	35	32	83	
	119A	34.0	40.9	54	60	49	77	58	58	60	53	81	56	56	60	51	79	60	60	70	55	83	
	NONE	—	—	14	20	81	81	81	81	18	19	85	16	16	20	17	83	20	20	25	21	87	
	118A	17.0	20.4	28	30	26	81	33	33	35	30	85	31	31	35	28	83	35	35	35	32	87	
575-3-60	119A	34.0	40.9	54	60	49	81	59	59	60	54	85	56	56	60	51	83	61	61	70	56	87	
MED	NONE	—	—	15	20	92	15	15	20	19	96	17	17	20	18	94	21	21	21	25	22	98	
	118A	17.0	20.4	29	30	27	92	34	34	35	31	96	32	32	35	29	94	36	36	40	33	98	
	119A	34.0	40.9	55	60	50	92	60	60	60	55	96	57	57	60	52	94	62	62	70	57	98	
	NONE	—	—	15	20	16	92	19	19	20	20	96	17	17	20	18	94	21	21	25	22	98	
	118A	17.0	20.4	29	30	27	92	34	34	35	31	96	32	32	35	29	94	36	36	40	33	98	
575-3-60	119A	34.0	40.9	55	60	50	92	60	60	60	55	96	57	57	60	52	94	62	62	70	57	98	

See "Legend and Notes for Tables 72 - 75" on page 141

ELECTRICAL INFORMATION
Table 73 – UNIT WIRE SIZING DATA WITH FACTORY INSTALLED HACR BREAKER WITH SINGLE SPEED INDOOR FAN MOTOR (cont)

UNIT	ELEC. HTR			NO C.O. or UNPWR C.O.						w/ PWR C.O.									
	IFM TYPE	CRHEATER***A00	Nom (kW)	FLA	NO PE.			w/ P.E. (pwrd fr/unit)			NO PE.			w/ P.E. (pwrd fr/unit)					
					MCA	HACR BRKR	DISC. SIZE	MCA	HACR BRKR	DISC. SIZE	MCA	HACR BRKR	DISC. SIZE	MCA	HACR BRKR	DISC. SIZE			
50HC*D11	STD	NONE	—	—	53/53	284	54/54	60/60	57/57	288	59/58	289	59/59	60/60	59/58	289	63/63	293	
		117A	7.8/10.4	21.7/25.0	53/53	284/284	54/54	60/60	57/57	288/288	59/58	289/289	59/59	60/60	59/58	289/289	63/63	293/293	
		110A	12.0/16.0	33.4/38.5	57/57	284/284	62/62	60/60	70/70	57/57	289/288	63/63	289/289	63/63	70/70	59/58	289/289	63/63	293/293
		112A	24.0/32.0	66.7/77.0	85/96	284/284	110/110	110/110	89/101	288/288	111/111	90/102	289/289	116/116	125/125	116/116	289/289	95/106	293/293
		112A+117A	31.8/42.4	88.4/102.0	136/136	284/284	141/141	150/150	114/129	288/288	142/142	115/131	289/289	147/147	150/150	147/147	150/150	119/135	293/293
		112A+110A	37.6/50.0	104.2/120.3	139/139	284/284	144/144	150/150	128/146	288/288	145/145	133/152	289/289	150/150	150/150	150/150	138/156	293/293	
		NONE	—	—	57	313	58	60	62	317	63	318	63	318	70	63	318	67	322
		117A	7.8/10.4	21.7/25.0	57/57	313/313	58/58	70/70	62/62	317/317	63/63	318/318	63/63	318/318	70/70	63/63	318/318	67/67	322/322
		110A	12.0/16.0	33.4/38.5	62/62	313/313	67/67	70/70	62/62	317/317	68/68	70/70	73/73	318/318	70/70	73/73	318/318	67/67	322/322
		112A	24.0/32.0	66.7/77.0	89/101	313/313	115/115	125/125	93/105	317/317	116/116	125/125	94/106	318/318	121/121	125/125	99/111	322/322	
112A+117A	31.8/42.4	88.4/102.0	141/141	313/313	148/148	150/150	114/129	317/317	147/147	119/135	318/318	152/152	175/175	124/139	322/322				
112A+110A	37.6/50.0	104.2/120.3	148/148	313/313	149/149	150/150	132/151	317/317	154/154	141/158	320/320	155/155	175/175	142/160	322/322				
460-3-60	STD	NONE	—	—	24	136	25	30	26	138	27	138	27	30	27	138	29	140	
		116A	13.9	16.7	26	136	28	30	26	138	28	30	27	30	27	138	31	140	
		119A	16.5	19.8	32	136	32	35	29	138	32	35	29	35	31	140	35	155	
		115A	33.0	39.7	54	136	57	60	52	138	57	60	52	60	52	138	59	60	
		114A+116A	41.7	50.2	67	136	70	70	64	138	67	70	64	70	70	138	72	80	
		115A+113A	50.0	60.1	65	136	67	70	73	138	67	70	76	138	70	80	78	80	
		NONE	—	—	25	151	27	30	28	153	27	30	29	153	29	30	30	31	
		116A	13.9	16.7	28	151	30	30	28	153	28	30	29	153	30	30	32	155	
		119A	16.5	19.8	34	151	34	35	31	153	35	35	31	153	37	37	40	33	
		115A	33.0	39.7	57	151	59	60	54	153	59	60	54	153	62	70	56	55	
114A+116A	41.7	50.2	70	151	72	80	66	153	73	80	66	153	75	80	68	68			
115A+113A	50.0	60.1	69	151	69	80	77	153	70	80	78	153	80	80	78	80			
575-3-60	STD	NONE	—	—	28	152	28	30	30	154	28	30	30	30	30	154	32	156	
		116A	13.9	16.7	29	152	32	35	30	154	32	35	30	35	30	154	34	156	
		119A	16.5	19.8	33	152	35	35	32	154	36	40	33	154	38	35	35		
		115A	33.0	39.7	58	152	60	60	55	154	61	70	58	154	63	70	58		
		114A+116A	41.7	50.2	71	152	73	80	67	154	74	80	66	154	76	80	70		
		115A+113A	50.0	60.1	69	152	71	80	79	154	71	80	79	154	74	80	81		
		NONE	—	—	18	95	21	20	23	99	19	19	20	97	23	25	24		
		118A	17.0	20.4	28	95	33	30	23	99	31	35	28	97	35	35	32		
		119A	34.0	40.9	54	95	59	60	54	99	56	60	51	97	61	70	56		
		118A+119A	51.0	61.3	64	95	69	80	77	99	66	70	75	97	71	80	79		
575-3-60	MED	NONE	—	—	19	106	22	25	110	20	25	21	108	24	25	25	25		
		118A	17.0	20.4	29	106	34	30	23	110	32	35	29	108	36	40	33		
		119A	34.0	40.9	55	106	60	60	55	110	57	60	52	108	62	70	57		
		118A+119A	51.0	61.3	65	106	70	70	78	110	67	70	76	108	72	80	79		
575-3-60	HIGH	NONE	—	—	22	120	25	30	27	124	23	32	24	27	27	30	29		
		118A	17.0	20.4	33	120	38	34	24	122	35	35	32	122	40	40	36		
		119A	34.0	40.9	59	120	63	70	58	124	61	70	55	122	65	70	60		
		118A+119A	51.0	61.3	69	120	74	74	81	124	71	80	79	122	76	80	83		

See "Legend and Notes for Tables 72 – 75" on page 141

ELECTRICAL INFORMATION
Table 73 - UNIT WIRE SIZING DATA WITH FACTORY INSTALLED HACR BREAKER WITH SINGLE SPEED INDOOR FAN MOTOR (cont)

UNIT	IFM TYPE	ELEC. HTR		NO C.O. or UNPWR C.O.					NO PE.					w/ PWRD C.O.														
		CRHEATER***A00	Nom (kW)	FLA	MCA	HACR BRKR	DISC. SIZE	MCA	HACR BRKR	DISC. SIZE	MCA	HACR BRKR	DISC. SIZE	MCA	HACR BRKR	DISC. SIZE	MCA	HACR BRKR	DISC. SIZE	w/ P.E. (pwrd fr/unit)								
208/230-3-60	STD	NONE	-	-	49/49	60/60	53/53	309	53/53	60/60	53/53	313	54/54	60/60	53/53	313	54/54	60/60	53/53	58/58	70/70	58/58	314	62/61	70/70	58/58	318	
		117A	7.8/10.4	21.7/25.0	49/49	60/60	53/53	309/309	56/56	60/60	53/53	313/313	54/54	60/60	53/53	313/313	54/54	60/60	53/53	58/58	70/70	58/58	314/314	62/61	70/70	58/58	318/318	
		110A	12.0/16.0	33.4/38.5	57/57	60/60	62/62	309/309	56/56	70/70	62/62	313/313	63/63	70/70	62/62	313/313	63/63	70/70	62/62	68/68	70/70	68/68	314/314	62/62	70/70	68/68	318/318	
		112A	24.0/32.0	66.7/77.0	105/105	110/110	110/110	309/309	89/101	110/110	110/110	313/313	111/111	125/125	150/150	111/111	111/111	125/125	150/150	111/111	116/116	125/125	116/116	314/314	95/106	125/125	116/116	318/318
		112A+117A	31.8/42.4	88.4/102.0	136/136	150/150	141/141	309/309	114/129	150/150	150/150	313/313	142/142	150/150	147/147	142/142	145/145	150/150	147/147	145/145	147/147	150/150	147/147	314/314	119/135	150/150	147/147	318/318
	112A+110A	37.6/50.0	104.2/120.3	139/139	150/150	128/146	309/309	132/150	150/150	150/150	313/313	145/145	150/150	141/144	145/145	133/152	150/150	141/144	145/145	150/150	150/150	141/144	314/314	138/156	150/150	138/156	318/318	
	MED	NONE	-	-	53	60	53	338	57	70	57	342	58	70	57	342	58	70	57	62	70	62	343	66	70	66	347	
		117A	7.8/10.4	21.7/25.0	53/53	60/60	53/53	338/338	57/57	70/70	57/57	342/342	58/58	70/70	57/57	342/342	58/58	70/70	57/57	62/62	70/70	62/62	343/343	66/66	70/70	66/66	347/347	
		110A	12.0/16.0	33.4/38.5	62/62	70/70	56/56	338/338	67/67	70/70	67/67	342/342	68/68	70/70	67/67	342/342	68/68	70/70	67/67	73/73	70/70	73/73	343/343	66/66	70/70	66/66	347/347	
		112A	24.0/32.0	66.7/77.0	110/110	110/110	89/101	338/338	115/115	125/125	125/125	342/342	116/116	125/125	125/125	116/116	116/116	125/125	125/125	121/121	121/121	121/121	343/343	99/111	125/125	99/111	347/347	
112A+117A		31.8/42.4	88.4/102.0	141/141	150/150	114/129	338/338	146/146	150/150	150/150	342/342	147/147	150/150	147/147	147/147	150/150	147/147	150/150	152/152	152/152	152/152	343/343	124/139	175/175	124/139	347/347		
112A+110A	37.6/50.0	104.2/120.3	144/144	150/150	132/151	338/338	149/149	150/150	150/150	342/342	150/150	149/149	150/150	150/150	150/150	150/150	150/150	155/155	155/155	155/155	343/343	142/160	175/175	142/160	347/347			
460-3-60	STD	NONE	-	-	24	30	24	148	26	30	26	150	26	30	26	150	26	30	28	30	28	150	30	30	30	152		
		116A	13.9	16.7	24	30	25	148	27	30	27	150	28	30	27	150	28	30	28	30	28	150	31	35	30	152		
		119A	16.5	19.8	29	30	27	148	29	30	29	150	32	35	30	29	150	32	35	34	30	34	150	31	35	31	152	
		115A	33.0	39.7	54	60	50	148	57	60	52	150	57	60	52	150	57	60	52	59	60	59	150	60	66	54	152	
		114A+116A	41.7	50.2	67	70	62	148	67	70	64	150	70	70	64	150	70	70	64	72	70	72	150	80	80	66	152	
	115A+113A	50.0	60.1	65	70	73	148	65	70	73	150	67	70	73	150	68	70	76	68	70	76	150	80	80	78	152		
	MED	NONE	-	-	26	30	26	163	28	30	28	165	28	30	28	165	28	30	28	30	28	165	30	30	30	167		
		116A	13.9	16.7	28	30	27	163	30	30	29	165	31	35	30	29	165	31	35	30	30	165	33	35	30	167		
		119A	16.5	19.8	32	35	29	163	34	35	31	165	35	35	35	31	165	35	35	37	40	37	165	33	40	33	167	
		115A	33.0	39.7	57	60	52	163	59	60	54	165	59	60	54	165	59	60	54	62	70	62	165	56	70	56	167	
114A+116A		41.7	50.2	67	70	64	163	72	70	66	165	73	80	66	165	73	80	66	75	75	75	165	80	80	68	167		
115A+113A	50.0	60.1	67	80	75	163	69	80	77	165	71	80	77	165	71	80	77	78	70	72	165	80	80	80	167			
575-3-60	STD	NONE	-	-	27	30	27	164	29	30	29	166	29	30	29	166	29	30	29	30	29	166	31	35	33	168		
		116A	13.9	16.7	29	30	29	164	32	35	31	166	32	35	31	166	32	35	31	34	34	166	34	35	33	168		
		119A	16.5	19.8	33	35	30	164	35	35	32	166	36	40	35	166	36	40	35	38	40	166	38	40	35	168		
		115A	33.0	39.7	58	60	53	164	60	60	55	166	61	70	56	166	61	70	56	63	70	63	166	58	70	58	168	
		114A+116A	41.7	50.2	69	70	65	164	73	80	67	166	74	80	68	166	74	80	68	76	76	76	166	80	80	70	168	
	115A+113A	50.0	60.1	69	80	76	164	71	80	79	166	71	80	79	166	71	80	79	74	74	74	166	81	80	81	168		
	MED	NONE	-	-	18	20	18	105	22	25	23	109	19	25	23	109	19	25	23	23	25	23	107	25	25	25	111	
		118A	17.0	20.4	28	30	26	105	33	35	30	109	32	35	30	109	31	35	30	35	35	35	107	32	35	32	111	
		119A	34.0	40.9	54	60	49	105	59	60	54	109	56	60	54	109	56	60	54	61	61	61	107	56	60	56	111	
		118A+119A	51.0	61.3	61	70	73	105	69	80	77	109	66	70	75	109	66	70	75	71	71	71	107	79	80	79	111	
118A+119A		51.0	61.3	65	70	74	105	69	80	77	109	66	70	75	109	66	70	75	71	71	71	107	79	80	79	111		
118A+119A	51.0	61.3	69	80	77	105	69	80	77	109	66	70	75	109	66	70	75	71	71	71	107	79	80	79	111			
HIGH	NONE	-	-	19	20	19	116	22	25	24	120	20	25	24	120	20	25	24	24	24	24	118	24	30	30	122		
	118A	17.0	20.4	29	30	27	116	34	35	31	120	32	35	30	120	32	35	30	36	36	36	118	24	30	36	122		
	119A	34.0	40.9	55	60	50	116	60	60	55	120	57	60	52	120	57	60	52	62	62	62	118	24	30	62	122		
	118A+119A	51.0	61.3	65	70	74	116	70	70	78	120	67	70	70	78	120	67	70	70	72	72	118	24	30	72	122		
	118A+119A	51.0	61.3	69	80	77	116	74	80	81	130	71	80	79	130	71	80	79	76	76	76	118	24	30	76	122		
118A+119A	51.0	61.3	69	80	77	116	74	80	81	130	71	80	79	130	71	80	79	76	76	76	118	24	30	76	122			

See "Legend and Notes for Tables 72 - 75" on page 141

ELECTRICAL INFORMATION

Table 73 - UNIT WIRE SIZING DATA WITH FACTORY INSTALLED HACR BREAKER WITH SINGLE SPEED INDOOR FAN MOTOR (cont)
(Units Produced On or After 02/16/2015)

UNIT	NO. M. V-PH-HZ	ELEC. HTR			NO. C.O. or UNPWR C.O.										w/ PWRD C.O.										
					NO. PE.					w/ P.E. (pwrd fr/unit)					NO. PE.					w/ P.E. (pwrd fr/unit)					
					MCA	HACR BRKR	DISC. SIZE		MCA	HACR BRKR	FLA	DISC. SIZE	LRA	MCA	HACR BRKR	FLA	DISC. SIZE	LRA	MCA	HACR BRKR	FLA	DISC. SIZE	LRA	MCA	HACR BRKR
50HC*D14 (2-stage cool) - Units produced on or after 02/16/2015	208-230-3-60	STD	NONE	-	57/57	70/70	60/60	356	61/61	80/80	64/64	360	62/62	80/80	65/65	66/66	80/80	65/65	361	66/66	80/80	66/66	70/70	365/365	
					60/60	70/70	60/60	356/356	65/65	80/80	64/64	360/360	66/66	80/80	65/65	361/361	67/70	80/80	71/71	80/80	66/66	80/80	70/70	365/365	
					91/91	100/100	73/83	356/356	95/95	100/100	78/87	360/360	97/97	100/100	79/88	361/361	96/108	100/110	101/101	100/110	98/98	101/101	100/110	83/93	365/365
					112/112	125/125	90/102	356/356	116/116	125/125	94/107	360/360	118/118	125/125	96/108	361/361	96/112	125/125	122/122	125/125	100/112	96/108	122/122	100/112	365/365
					142/142	150/150	114/130	356/356	146/146	150/150	118/134	360/360	148/148	150/150	119/135	361/361	119/135	150/150	152/152	150/150	124/140	119/135	152/152	124/140	365/365
	141/141	150/150	130/148	356/356	146/146	150/150	134/152	360/360	147/147	150/150	135/153	361/361	135/153	150/150	152/152	150/150	139/158	135/153	152/152	139/158	365/365				
	60	70	62	370	63	80	67	374	64	80	68	375	68	80	68	80	72	68	80	72	68	80	379		
	63/63	70/70	62/62	370/370	68/68	80/80	67/67	374/374	69/69	80/80	68/68	375/375	69/69	80/80	74/74	80/80	72/72	69/69	80/80	74/74	80/80	379/379			
	93/93	100/100	76/86	370/370	98/98	100/100	80/90	374/374	99/99	100/100	81/91	375/375	99/99	100/100	104/104	110/110	110/110	81/91	104/104	110/110	86/95	379/379			
	114/114	125/125	93/105	370/370	119/119	125/125	97/109	374/374	120/120	125/125	98/110	375/375	120/120	125/125	125/125	125/125	125/125	98/110	125/125	125/125	102/115	379/379			
145/145	150/150	116/133	370/370	149/149	150/150	121/137	374/374	151/151	150/150	122/138	375/375	151/151	150/150	155/155	155/155	155/155	122/138	155/155	155/155	126/142	379/379				
144/144	150/150	132/151	370/370	149/149	150/150	137/155	374/374	150/150	150/150	138/156	375/375	150/150	150/150	155/155	155/155	155/155	137/155	155/155	155/155	142/160	379/379				
70	80	74	376	73	80	78	380	74	80	79	381	74	80	78	80	84	79	78	80	84	80	385			
76/76	80/80	74/74	376/376	80/80	80/80	78/78	380/380	82/82	90/90	79/79	381/381	82/82	90/90	86/86	86/86	90/90	86/86	82/82	90/90	86/86	90/90	385/385			
106/106	110/110	87/97	376/376	110/110	125/125	91/101	380/380	112/112	125/125	93/102	381/381	112/112	125/125	116/116	116/116	125/125	93/102	116/116	125/125	116/116	125/125	385/385			
127/127	150/150	104/116	376/376	131/131	150/150	108/121	380/380	133/133	150/150	109/122	381/381	133/133	150/150	137/137	137/137	150/150	109/122	137/137	150/150	137/137	150/150	385/385			
157/157	175/175	128/144	376/376	162/162	175/175	132/148	380/380	163/163	175/175	133/149	381/381	163/163	175/175	168/168	168/168	175/175	133/149	168/168	175/175	168/168	175/175	385/385			
156/156	175/175	143/162	376/376	161/161	175/175	148/166	380/380	162/162	175/175	149/167	381/381	162/162	175/175	167/167	167/167	175/175	149/167	167/167	175/175	167/167	175/175	385/385			
26	30	26	174	27	30	29	176	28	30	29	176	28	30	30	30	35	29	30	30	35	35	178			
31	35	28	174	33	35	30	176	33	35	30	176	33	35	36	36	40	30	36	36	40	40	178			
46	50	42	174	48	50	44	176	48	50	44	176	48	50	51	51	60	44	51	51	60	60	178			
56	60	51	174	58	60	53	176	59	60	54	176	59	60	61	61	70	54	61	61	70	70	178			
71	80	65	174	73	80	67	176	74	80	68	176	74	80	74	74	80	68	74	74	80	80	178			
66	70	74	174	68	80	76	176	69	80	77	176	69	80	71	71	80	77	71	71	80	80	178			
27	30	28	181	28	35	30	183	29	35	30	183	29	35	31	31	35	30	31	31	35	35	185			
32	35	29	181	34	35	31	183	35	35	31	183	35	35	37	37	40	31	37	37	40	40	185			
47	50	43	181	49	50	45	183	50	50	45	183	50	50	52	52	60	45	52	52	60	60	185			
57	60	52	181	60	60	55	183	60	60	55	183	60	60	62	62	70	55	62	62	70	70	185			
72	80	66	181	75	80	68	183	75	80	69	183	75	80	77	77	80	69	77	77	80	80	185			
67	80	75	181	70	80	77	183	70	80	78	183	70	80	72	72	80	78	72	72	80	80	185			
32	40	33	184	34	40	35	186	34	40	35	186	34	40	36	36	45	35	36	36	45	45	188			
38	40	35	184	40	40	37	186	41	45	37	186	41	45	43	43	45	37	43	43	45	45	188			
53	60	48	184	55	60	50	186	56	60	51	186	56	60	58	58	60	51	58	58	60	60	188			
64	70	58	184	66	70	60	186	66	70	61	186	66	70	69	69	70	61	69	69	70	70	188			
79	80	72	184	81	90	74	186	81	90	74	186	81	90	84	84	90	74	84	84	90	90	188			
73	80	81	184	76	80	83	186	76	80	83	186	76	80	78	78	80	83	78	78	80	80	188			
460-3-60																									
292A																									
289A+292A																									
295A																									
289A+295A																									
292A+295A																									
292A																									
289A+292A																									
295A																									
289A+295A																									
292A+295A																									

ELECTRICAL INFORMATION

Table 73 - UNIT WIRE SIZING DATA WITH FACTORY INSTALLED HACR BREAKER WITH SINGLE SPEED INDOOR FAN MOTOR (cont)

UNIT	NO M. V-Ph-HZ	ELEC. HTR			NO C.O. or UNPWR C.O.															
		CRHEATER ***400	Nom (kW)	FLA	NO PE.				w/ P.E. (pwrdr fr/unit)				NO PE.				w/ PWRD C.O.			
					MCA	HACR BRKR	FLA	LRA	MCA	HACR BRKR	FLA	LRA	MCA	HACR BRKR	FLA	LRA	MCA	HACR BRKR	FLA	LRA
50HC*D14 (2-stage cool) - Units produced on or after 02/16/2015	STD	NONE	-	-	20	25	21	138	24	30	25	142	22	25	23	140	26	30	27	144
		293A	16.5	15.9	24	25	22	138	29	30	26	142	26	30	23	140	31	35	28	144
		290A+293A	26.5	25.5	36	40	33	138	41	45	37	142	38	40	35	140	43	45	39	144
		296A	33.5	32.2	44	45	40	138	49	50	45	142	46	50	42	140	51	60	47	144
		290A+296A	43.5	41.8	56	60	51	138	61	70	56	142	58	60	53	140	63	70	58	144
575-3-60	MED	293A+296A	50.0	48.1	52	60	59	138	57	60	63	142	54	60	60	140	59	60	65	144
		NONE	-	-	20	25	21	138	24	30	25	142	22	25	23	140	26	30	27	144
		293A	16.5	15.9	24	25	22	138	29	30	26	142	26	30	23	140	31	35	28	144
		290A+293A	26.5	25.5	36	40	33	138	41	45	37	142	38	40	35	140	43	45	39	144
		296A	33.5	32.2	44	45	40	138	49	50	45	142	46	50	42	140	51	60	47	144
50HC*D14 (2-stage cool) - Units produced on or after 02/16/2015	HIGH	290A+296A	43.5	41.8	64	70	58	150	69	70	63	154	66	70	60	152	71	80	65	156
		293A+296A	50.0	48.1	60	70	66	150	65	70	70	154	62	70	68	152	67	70	72	156
		NONE	-	-	27	30	28	150	31	35	32	154	29	35	30	152	33	40	34	156
		293A	16.5	15.9	32	35	29	150	36	40	33	154	34	35	31	152	38	40	35	156
		290A+293A	26.5	25.5	44	45	40	150	48	50	44	154	46	50	42	152	50	60	46	156

ELECTRICAL INFORMATION

Table 73 - UNIT WIRE SIZING DATA WITH FACTORY INSTALLED HACR BREAKER WITH SINGLE SPEED INDOOR FAN MOTOR (cont)

UNIT	NOM. V-PH-HZ	IFM TYPE	ELEC. HTR			NO C.O. or UNPWR C.O.						w/ PWRD C.O.										
			CRHEATER***A00	Nom (kW)	FLA	NO P.E.			w/ P.E. (pwrd fr/unit)			NO P.E.			w/ P.E. (pwrd fr/unit)							
						MCA	HACR BRKR	DISC. SIZE FLA LRA	MCA	HACR BRKR	DISC. SIZE FLA LRA	MCA	HACR BRKR	DISC. SIZE FLA LRA	MCA	HACR BRKR	DISC. SIZE FLA LRA					
50HC*D14	575-3-60	STD	NONE	-	-	22	25	23	128	26	30	27	132	24	30	25	130	28	30	29	134	
			298A	16.5	15.9	24	25	23	128	29	30	27	132	26	30	25	130	31	35	29	134	
			290A+293A	26.5	25.5	36	40	33	128	41	45	37	132	38	40	35	130	43	45	39	47	134
			296A	33.5	32.2	44	45	40	128	49	50	45	132	46	50	42	130	51	60	47	60	134
			290A+296A	43.5	41.8	56	60	51	128	61	70	56	132	58	60	53	130	63	70	58	70	134
			293A+296A	50.0	48.1	52	60	59	128	57	60	63	132	54	60	60	130	59	60	65	65	134
50HC*D14	575-3-60	MED	NONE	-	-	22	25	23	128	26	30	27	132	24	30	25	130	28	30	29	134	
			293A	16.5	15.9	24	25	23	128	29	30	27	132	26	30	25	130	31	35	29	134	
			290A+293A	26.5	25.5	36	40	33	128	41	45	37	132	38	40	35	130	43	45	39	47	134
			296A	33.5	32.2	44	45	40	128	49	50	45	132	46	50	42	130	51	60	47	60	134
			290A+296A	43.5	41.8	56	60	51	128	61	70	56	132	58	60	53	130	63	70	58	70	134
			293A+296A	50.0	48.1	52	60	59	128	57	60	63	132	54	60	60	130	59	60	65	65	134
50HC*D14	575-3-60	HIGH	NONE	-	-	29	35	30	140	32	40	34	144	30	35	32	142	34	40	36	146	
			293A	16.5	15.9	32	35	30	140	36	40	34	144	34	35	32	142	38	40	36	146	
			290A+293A	26.5	25.5	44	45	40	140	48	50	44	144	46	50	42	142	50	60	46	60	146
			296A	33.5	32.2	52	60	47	140	57	60	52	144	54	60	49	142	59	60	54	60	146
			290A+296A	43.5	41.8	64	70	58	140	69	70	63	144	66	70	60	142	71	80	65	80	146
			293A+296A	50.0	48.1	60	70	66	140	65	70	70	144	62	70	68	142	67	70	72	70	146

See "Legend and Notes for Tables 72 - 75" on page 141

ELECTRICAL INFORMATION

Table 74 – UNIT WIRE SIZING DATA WITH FACTORY INSTALLED 2 SPEED INDOOR FAN OPTION

UNIT	ELEC. HTR			NO C.O. or UNPWR C.O.																									
	IFM TYPE	CRHEATER***A00	Nom (kW)	FLA	NO PE.				w/ P.E. (pwrd fr/unit)				NO PE.				w/ PWRD C.O.												
					MCA	MAX FUSE or HACR BRKR	FLA	LRA	MCA	MAX FUSE or HACR BRKR	FLA	LRA	MCA	MAX FUSE or HACR BRKR	FLA	LRA	MCA	MAX FUSE or HACR BRKR	FLA	LRA	MCA	MAX FUSE or HACR BRKR	FLA	LRA					
50HC+D08	208/230-3-60				40/40	50/50	41/41	195	44/43	50/50	46/46	199	45/44	50/50	47/47	200	48/48	48/48	60/60	51/51	204	48/48	60/60	51/51	204				
					40/40	50/50	41/41	195/195	44/43	50/50	46/46	199/199	45/45	50/50	47/47	200/200	48/49	50/50	48/48	204/204	50/51	60/60	53/52	208/208	50/51	60/60	53/52	208/208	
					49/56	50/60	45/51	195/195	54/60	60/60	49/55	199/199	55/62	60/70	51/56	200/200	60/66	60/70	51/56	200/200	60/66	60/70	55/61	204/204	60/66	60/70	55/61	204/204	
					72/82	80/90	66/75	195/195	77/87	80/90	70/79	199/199	78/88	80/90	72/81	200/200	83/83	80/90	78/88	200/200	83/83	80/90	76/85	204/204	83/83	90/100	76/85	204/204	
					91/104	100/110	83/95	195/195	96/108	100/110	88/99	199/199	97/110	100/110	89/101	200/200	102/114	100/110	97/110	200/200	102/114	110/125	93/105	204/204	102/114	110/125	93/105	204/204	
					118/135	125/150	108/124	195/195	123/140	125/150	113/128	199/199	124/141	125/150	114/129	200/200	129/146	150/150	114/129	200/200	129/146	150/150	118/134	204/204	129/146	150/150	118/134	204/204	
	460-3-60					41/41	50/50	43/43	199	45/45	50/50	47/47	203	46/46	50/50	48/48	204	50/49	50/49	60/60	53/52	208	50/49	60/60	53/52	208			
						41/41	50/50	43/43	199/199	45/45	50/50	47/47	203/203	46/46	50/50	48/48	204/204	50/51	60/60	53/52	208/208	50/51	60/60	53/52	208/208	50/51	60/60	53/52	208/208
						51/57	60/60	47/52	199/199	56/62	60/70	51/56	203/203	57/63	60/70	52/58	204/204	62/68	70/70	56/62	208/208	62/68	70/70	56/62	208/208	62/68	70/70	56/62	208/208
						74/84	80/90	68/76	199/199	79/88	80/90	72/81	203/203	80/90	80/90	73/82	204/204	85/84	90/100	78/86	208/208	85/84	90/100	78/86	208/208	85/84	90/100	78/86	208/208
						93/105	100/110	85/96	199/199	97/110	100/110	89/101	203/203	99/111	100/125	90/102	204/204	103/116	100/125	95/106	208/208	103/116	100/125	95/106	208/208	103/116	100/125	95/106	208/208
						120/136	125/150	114/125	199/199	125/141	125/150	114/129	203/203	126/142	150/150	115/131	204/204	131/147	150/150	120/135	208/208	131/147	150/150	120/135	208/208	131/147	150/150	120/135	208/208
460-3-60					45/44	50/50	47/46	249	49/49	60/60	52/50	253	50/49	60/60	53/52	254	53/52	53/52	60/60	57/56	258	53/52	60/60	57/56	258				
					45/44	50/50	47/46	249/249	49/49	60/60	52/50	253/253	50/50	60/60	53/52	254/254	53/55	60/60	57/56	258/258	53/55	60/60	57/56	258/258	53/55	60/60	57/56	258/258	
					56/61	60/70	51/56	249/249	60/66	60/70	55/60	253/253	62/67	70/70	56/61	254/254	66/72	70/80	61/65	258/258	66/72	70/80	61/65	258/258	66/72	70/80	61/65	258/258	
					79/87	80/90	72/80	249/249	83/92	90/100	76/84	253/253	85/93	90/100	77/85	254/254	89/98	90/100	82/90	258/258	89/98	90/100	82/90	258/258	89/98	90/100	82/90	258/258	
					97/109	100/110	89/100	249/249	102/114	110/125	93/104	253/253	103/115	110/125	95/105	254/254	108/120	110/125	99/110	258/258	108/120	110/125	99/110	258/258	108/120	110/125	99/110	258/258	
					124/140	125/150	114/129	249/249	123/145	150/150	118/133	253/253	130/146	150/150	120/134	254/254	135/151	150/175	124/138	258/258	135/151	150/175	124/138	258/258	135/151	150/175	124/138	258/258	
57S-3-60	STD				19	20	19	97	20	25	21	99	21	25	22	24	23	23	25	24	24	23	25	24	24				
					25	25	23	97	27	30	25	99	28	30	25	99	30	30	27	26	30	27	26	30	27	26			
					29	30	26	97	31	35	28	99	32	35	29	99	34	35	29	99	34	35	31	34	31	34	31		
					46	50	42	97	48	50	44	99	49	50	44	99	51	50	44	99	51	50	46	46	51	50	46	46	
					54	60	49	97	56	60	51	99	56	60	51	99	59	60	52	99	59	60	52	52	60	60	55	60	
					67	70	61	97	69	70	63	99	70	70	64	99	72	70	65	99	72	70	64	66	80	80	66	66	
	MED					20	25	20	100	21	25	22	102	22	25	23	23	24	24	25	25	25	24	25	25	25			
						26	30	24	100	28	30	26	102	29	30	26	102	31	35	28	30	30	28	30	29	30	28	30	
						30	30	27	100	32	35	29	102	33	35	29	102	35	35	30	30	32	35	32	32	35	35	32	35
						47	50	43	100	49	50	45	102	50	50	45	102	52	50	45	102	52	50	47	47	53	60	49	49
						55	60	50	100	57	60	52	102	58	60	52	102	61	60	53	102	61	60	52	56	61	70	56	56
						68	70	62	100	70	70	64	102	71	80	65	102	73	80	65	102	73	80	66	68	74	80	68	68
HIGH					21	25	22	125	22	25	24	127	23	25	24	24	25	24	25	25	24	24	25	24	24				
					27	30	25	125	30	30	27	127	30	30	27	127	32	35	27	27	32	35	29	31	36	40	33		
					31	35	28	125	34	35	29	127	34	35	29	127	36	40	31	31	36	40	33	33	40	33	33	40	
					48	50	44	125	51	60	46	127	51	60	46	127	53	60	47	47	53	60	49	49	53	60	49	49	
					56	60	51	125	58	60	53	127	59	60	53	127	61	70	54	54	61	70	56	56	61	70	56	56	
					69	70	63	125	72	80	65	127	72	80	65	127	74	80	66	66	74	80	68	68	74	80	68	68	
STD					14	15	14	79	18	20	19	83	16	20	16	16	19	19	25	21	21	19	25	21	19				
					17	17	14	79	19	19	18	83	17	20	17	83	17	20	17	83	17	20	17	83	17	20	17		
					29	30	27	79	34	35	31	83	32	35	29	81	36	40	32	35	36	40	33	36	40	33	36	40	
					55	60	50	79	60	60	55	83	57	60	55	83	62	70	57	60	62	70	57	60	62	70	57	60	
					15	20	15	83	18	20	19	87	16	20	17	85	20	25	17	85	20	25	21	21	25	21	21	25	
					30	30	27	83	35	35	32	87	32	35	29	85	37	40	32	35	37	40	34	34	37	40	34	34	
MED					15	20	15	83	18	20	19	87	16	20	16	16	19	19	25	21	21	19	25	21	19				
					17	17	14	79	19	19	18	83	17	20	17	83	17	20	17	83	17	20	17	83	17	20	17		
					29	30	27	79	34	35	31	83	32	35	29	81	36	40	32	35	36	40	33	36	40	33	36	40	
					55	60	50	79	60	60	55	83	57	60	55	83	62	70	57	60	62	70	57	60	62	70	57	60	
					15	20	15	83	18	20	19	87	16	20	17	85	20	25	17	85	20	25	21	21	25	21	21	25	
					30	30	27	83	35	35	32	87	32	35	29	85	37	40	32	35	37	40	34	34	37	40	34	34	
HIGH					16	20	16	92	19	25	21	96	17	20	18	94	21	23	25	23	23	18	25	23	18				
					32	35	29	92	36	40	33	96	34	40	33	96	38	40	35	38	40	35							

ELECTRICAL INFORMATION

Table 74 - UNIT WIRE SIZING DATA WITH FACTORY INSTALLED 2 SPEED INDOOR FAN OPTION (cont)

UNIT	IFM TYPE	ELEC. HTR			NO C.O. or UNPWR C.O.												w/ PWR C.O.					
		CRHEATER***A00	Nom (kW)	FLA	NO PE.				w/ P.E. (pwrd fr/unit)				NO PE.				w/ P.E. (pwrd fr/unit)					
					MCA	MAX FUSE or HACR BRKR	FLA	DISC. SIZE	MCA	MAX FUSE or HACR BRKR	FLA	DISC. SIZE	MCA	MAX FUSE or HACR BRKR	FLA	DISC. SIZE	MCA	MAX FUSE or HACR BRKR	FLA	DISC. SIZE		
50HC+D09	STD	NONE	-	-	40/40	50/50	42/41	195	44/44	50/50	46/46	199	45/45	50/50	47/47	200	49/48	60/60	52/51	204		
		117A	7.8/10.4	21.7/25.0	40/40	50/50	42/41	195/195	44/44	50/50	46/46	199/199	45/45	50/50	47/47	200/200	49/49	60/60	52/51	204/204		
		110A	12.0/16.0	33.4/38.5	49/56	60/60	45/51	195/195	54/60	60/60	49/55	199/199	55/62	60/70	51/56	200/200	60/66	60/70	55/61	204/204		
		111A	18.6/24.8	51.7/59.7	72/82	80/80	66/75	195/195	77/87	80/90	70/79	199/199	78/88	80/90	73/82	204/204	83/83	90/100	76/85	204/204		
		112A	24.0/32.0	66.7/77.0	91/104	100/110	83/95	195/195	96/108	100/110	88/99	199/199	97/110	100/110	90/102	204/204	102/114	110/125	93/105	204/204		
		112A+117A	31.8/42.4	88.4/102.0	118/135	125/150	108/124	195/195	123/140	125/150	113/128	199/199	124/141	125/150	114/129	200/200	129/146	150/150	118/134	204/204		
		NONE	-	-	41/41	50/50	43/43	199	45/45	50/50	47/47	203	46/46	50/50	49/48	204	50/50	53/53	208			
		117A	7.8/10.4	21.7/25.0	41/41	50/50	43/43	199/199	45/45	50/50	47/47	203/203	46/46	50/50	49/48	204/204	50/51	53/53	208/208			
		110A	12.0/16.0	33.4/38.5	51/57	60/60	47/52	199/199	56/62	60/70	51/56	203/203	57/63	60/70	52/58	204/204	62/68	70/70	56/62	208/208		
		111A	18.6/24.8	51.7/59.7	74/84	80/80	68/76	199/199	79/88	80/90	72/81	203/203	80/90	80/90	73/82	204/204	85/94	90/100	78/86	208/208		
		112A	24.0/32.0	66.7/77.0	93/105	100/110	85/96	199/199	97/110	100/110	89/101	203/203	99/111	100/125	90/102	204/204	103/116	110/125	95/106	208/208		
		112A+117A	31.8/42.4	88.4/102.0	120/136	125/150	114/129	199/199	125/141	129/145	114/129	203/203	126/142	150/150	115/131	204/204	131/147	150/150	120/135	208/208		
		NONE	-	-	45/44	50/50	47/46	249	49/49	60/60	52/51	253	50/49	60/60	53/52	254	54/53	60/60	57/56	258		
		117A	7.8/10.4	21.7/25.0	45/44	50/50	47/46	249/249	49/49	60/60	52/51	253/253	50/50	60/60	53/52	254/254	54/55	60/60	57/56	258/258		
		110A	12.0/16.0	33.4/38.5	56/61	60/70	51/56	249/249	60/66	60/70	55/60	253/253	62/67	70/70	56/61	254/254	66/72	70/80	61/65	258/258		
111A	18.6/24.8	51.7/59.7	79/87	80/90	72/80	249/249	83/92	90/100	76/84	253/253	85/93	90/100	77/85	254/254	89/98	90/100	82/90	258/258				
112A	24.0/32.0	66.7/77.0	97/109	100/110	89/100	249/249	102/114	110/125	93/104	253/253	103/115	110/125	95/105	254/254	108/120	110/125	99/110	258/258				
112A+117A	31.8/42.4	88.4/102.0	124/140	125/150	114/129	249/249	129/145	150/150	118/133	253/253	130/146	150/150	120/134	254/254	135/151	150/175	124/138	258/258				
460-3-60	STD	NONE	-	-	19	25	19	97	21	25	22	99	21	25	22	99	23	25	24	101		
		116A	13.9	16.7	25	30	23	97	27	30	25	99	28	30	25	99	30	30	27	101		
		113A	16.5	19.8	29	30	26	97	31	35	28	99	32	35	29	99	34	35	31	101		
		114A	27.8	33.4	46	50	42	97	48	50	44	99	49	50	44	99	51	60	46	101		
		115A	33.0	39.7	54	60	49	97	56	60	51	99	56	60	52	99	59	60	54	101		
		114A+116A	41.7	50.2	67	70	61	97	69	70	63	99	67	70	64	99	72	80	66	101		
		NONE	-	-	20	25	20	100	22	25	23	102	22	25	23	102	24	25	25	104		
		116A	13.9	16.7	26	30	24	100	28	30	26	102	29	30	26	102	31	35	28	104		
		113A	16.5	19.8	30	30	27	100	32	35	29	102	33	35	30	102	35	35	32	104		
		114A	27.8	33.4	47	50	43	100	49	50	45	102	50	50	45	102	52	60	47	104		
		115A	33.0	39.7	55	60	50	100	57	60	52	102	58	60	53	102	60	60	55	104		
		114A+116A	41.7	50.2	68	70	62	100	70	70	64	102	71	80	66	102	73	80	67	104		
		NONE	-	-	21	25	22	125	23	25	24	127	23	25	24	127	25	30	26	129		
		116A	13.9	16.7	27	30	25	125	30	30	27	127	30	30	27	127	32	35	29	129		
		113A	16.5	19.8	31	35	28	125	34	35	30	127	34	35	31	127	36	40	33	129		
114A	27.8	33.4	48	50	44	125	51	50	46	127	51	60	47	127	53	60	49	129				
115A	33.0	39.7	56	60	51	125	58	60	53	127	59	60	54	127	61	70	56	129				
114A+116A	41.7	50.2	69	70	63	125	72	70	65	127	72	80	66	127	74	80	68	129				
NONE	-	-	15	20	16	79	19	20	18	83	17	20	18	81	21	25	22	85				
118A	17.0	20.4	29	30	27	79	34	35	31	83	32	35	29	81	36	40	33	85				
119A	34.0	40.9	55	60	50	79	60	60	55	83	57	60	52	81	62	70	57	85				
NONE	-	-	16	20	16	83	20	25	21	87	18	20	18	85	21	25	23	89				
118A	17.0	20.4	30	30	27	83	35	35	32	87	32	35	29	85	37	40	34	89				
119A	34.0	40.9	56	60	51	83	61	70	55	87	58	60	53	85	63	70	57	89				
NONE	-	-	17	20	18	92	21	25	19	96	19	20	20	94	22	25	24	98				
118A	17.0	20.4	32	35	29	92	36	40	33	96	34	35	31	94	38	40	35	98				
119A	34.0	40.9	57	60	52	92	62	70	57	96	59	60	54	94	64	70	59	98				

See "Legend and Notes for Tables 72 - 75" on page 141

ELECTRICAL INFORMATION

Table 74 - UNIT WIRE SIZING DATA WITH FACTORY INSTALLED 2 SPEED INDOOR FAN OPTION (cont)

UNIT	NOM. V-PH-HZ	IFM TYPE	ELEC. HTR				NO C.O. or UNPWR C.O.						w/ PWR C.O.										
			CHRHEATER**A00	Nom (kW)	FLA	NO PE.		w/ P.E. (pwrd fr/unit)		MCA	MAX FUSE or HACR BRKR	DISC. SIZE		MCA	MAX FUSE or HACR BRKR	NO PE.		w/ PWR C.O.					
						MCA	FLA	LRA	FLA			LRA	MCA			FLA	LRA	FLA	LRA	MCA	FLA	LRA	
50HC*D11		STD	NONE	-	-	53/53	254	58/57	258	56/55	60/60	58/57	258	59/58	259	59/58	259	59/59	259	63/63	263	63/63	263
			117A	7.8/10.4	21.7/25.0	53/53	254/254	58/57	258/258	56/55	60/60	58/57	258/258	59/58	259/259	59/59	259/259	63/63	263/263	63/63	263/263		
	208/230-3-60	MED	110A	12.0/16.0	33.4/38.5	53/53	254/254	58/57	258/258	57/63	60/70	58/57	258/258	59/58	259/259	62/68	70/70	63/68	70/70	95/106	263/263	95/106	263/263
			112A	24.0/32.0	66.7/77.0	89/105	254/254	97/110	100/110	100/110	97/110	100/110	89/101	258/258	99/111	100/125	103/116	110/125	103/116	110/125	124/138	313/313	124/138
	460-3-60	MED	112A+117A	31.8/42.4	88.4/102.0	120/136	254/254	125/150	258/258	126/142	150/150	114/129	258/258	131/147	259/259	131/147	150/150	120/135	150/150	138/156	263/263	138/156	263/263
			112A+110A	37.6/50.0	104.2/120.3	140/137	254/254	144/134	150/150	144/134	150/150	132/151	258/258	146/135	150/140	150/140	131/147	150/150	138/156	150/140	138/156	263/263	138/156
	575-3-60	STD	NONE	-	-	57/56	304	62/61	308	59/58	70/70	62/61	308	59/58	309	63/62	70/70	67/66	70/70	67/66	313	67/66	313
			117A	7.8/10.4	21.7/25.0	54/53	304/304	58/57	304/304	60/60	58/57	70/70	62/61	308/308	60/66	308/308	63/62	309/309	63/62	309/309	67/66	313/313	67/66
	50HC*D11	HIGH	110A	12.0/16.0	33.4/38.5	57/56	304/304	60/66	308/308	102/114	110/125	93/104	308/308	103/115	309/309	108/120	110/125	99/110	110/125	99/110	313/313	110/125	313/313
			112A	24.0/32.0	66.7/77.0	89/100	304/304	102/114	110/110	102/114	110/125	110/125	93/104	308/308	103/115	309/309	108/120	110/125	99/110	110/125	99/110	313/313	110/125
	460-3-60	HIGH	112A+117A	31.8/42.4	88.4/102.0	128/144	315/315	133/149	319/319	134/150	150/150	122/136	319/319	134/150	150/150	123/137	320/320	139/155	150/175	127/142	324/324	139/155	324/324
			112A+110A	37.6/50.0	104.2/120.3	148/137	315/315	152/141	319/319	154/143	150/150	140/157	319/319	154/143	150/150	141/158	320/320	158/147	175/175	145/163	324/324	158/147	324/324
	50HC*D11	STD	NONE	-	-	24	122	25	122	25	30	27	124	26	30	27	124	28	30	29	126	30	29
			116A	13.9	16.7	61/60	315/315	61/60	319/319	62/61	70/70	65/64	319/319	65/64	319/319	65/70	70/70	66/65	80/80	80/80	71/70	80/80	71/70
	460-3-60	MED	113A	16.5	19.8	61/60	315/315	64/69	319/319	106/117	110/125	97/108	319/319	107/119	110/125	98/109	320/320	112/123	125/125	102/113	126	125/125	102/113
			115A	33.0	39.7	82/103	315/315	106/117	110/125	106/117	110/125	97/108	319/319	107/119	110/125	98/109	320/320	112/123	125/125	102/113	126	125/125	102/113
	50HC*D11	STD	114A+116A	41.7	50.2	82/103	315/315	133/149	319/319	152/141	175/175	140/157	319/319	154/143	175/175	141/158	320/320	158/147	175/175	145/163	126	175/175	145/163
			115A+113A	50.0	60.1	82/103	315/315	152/141	175/175	152/141	175/175	140/157	319/319	154/143	175/175	141/158	320/320	158/147	175/175	145/163	126	175/175	145/163
	460-3-60	MED	NONE	-	-	25	147	27	147	27	30	28	149	27	30	28	149	29	30	30	151	30	30
			116A	13.9	16.7	61/60	315/315	61/60	319/319	62/61	70/70	65/64	319/319	65/64	319/319	65/70	70/70	66/65	80/80	80/80	71/70	80/80	71/70
	50HC*D11	HIGH	113A	16.5	19.8	82/103	315/315	106/117	110/125	106/117	110/125	97/108	319/319	107/119	110/125	98/109	320/320	112/123	125/125	102/113	126	125/125	102/113
			115A	33.0	39.7	82/103	315/315	106/117	110/125	106/117	110/125	97/108	319/319	107/119	110/125	98/109	320/320	112/123	125/125	102/113	126	125/125	102/113
	460-3-60	STD	114A+116A	41.7	50.2	82/103	315/315	133/149	319/319	152/141	175/175	140/157	319/319	154/143	175/175	141/158	320/320	158/147	175/175	145/163	126	175/175	145/163
			115A+113A	50.0	60.1	82/103	315/315	152/141	175/175	152/141	175/175	140/157	319/319	154/143	175/175	141/158	320/320	158/147	175/175	145/163	126	175/175	145/163
	575-3-60	STD	NONE	-	-	26	152	28	152	28	30	27	154	28	30	27	154	29	30	30	156	30	30
			116A	13.9	16.7	61/60	315/315	61/60	319/319	62/61	70/70	65/64	319/319	65/64	319/319	65/70	70/70	66/65	80/80	80/80	71/70	80/80	71/70
	575-3-60	MED	113A	16.5	19.8	82/103	315/315	106/117	110/125	106/117	110/125	97/108	319/319	107/119	110/125	98/109	320/320	112/123	125/125	102/113	126	125/125	102/113
			115A	33.0	39.7	82/103	315/315	106/117	110/125	106/117	110/125	97/108	319/319	107/119	110/125	98/109	320/320	112/123	125/125	102/113	126	125/125	102/113
	575-3-60	HIGH	114A+116A	41.7	50.2	82/103	315/315	133/149	319/319	152/141	175/175	140/157	319/319	154/143	175/175	141/158	320/320	158/147	175/175	145/163	126	175/175	145/163
			115A+113A	50.0	60.1	82/103	315/315	152/141	175/175	152/141	175/175	140/157	319/319	154/143	175/175	141/158	320/320	158/147	175/175	145/163	126	175/175	145/163
	575-3-60	STD	NONE	-	-	20	97	23	97	23	30	24	101	21	25	22	99	25	30	26	103	26	103
			118A	17.0	20.4	61/60	315/315	61/60	319/319	62/61	70/70	65/64	319/319	65/64	319/319	65/70	70/70	66/65	80/80	80/80	71/70	80/80	71/70
	575-3-60	MED	119A	34.0	40.9	51	97	61	97	61	80	55	101	58	60	53	99	63	70	57	103	63	70
			119A	34.0	40.9	51	97	61	97	61	80	55	101	58	60	53	99	63	70	57	103	63	70
	575-3-60	HIGH	NONE	-	-	20	106	24	106	24	25	110	22	25	23	108	26	30	27	112	27	112	
			118A	17.0	20.4	61/60	315/315	61/60	319/319	62/61	70/70	65/64	319/319	65/64	319/319	65/70	70/70	66/65	80/80	80/80	71/70	80/80	71/70
	575-3-60	HIGH	119A	34.0	40.9	51	97	61	97	61	80	55	101	58	60	53	99	63	70	57	103	63	70
			119A	34.0	40.9	51	97	61	97	61	80	55	101	58	60	53	99	63	70	57	103	63	70

See "Legend and Notes for Tables 72 - 75" on page 141

ELECTRICAL INFORMATION

Table 74 - UNIT WIRE SIZING DATA WITH FACTORY INSTALLED 2 SPEED INDOOR FAN OPTION (cont)

UNIT	NOM. V-PH-HZ	ELEC. HTR				NO C.O. or UNPWR C.O.						w/ PWRD C.O.									
		CRHEATER**A00	Nom (kW)	FLA	MCA	MAX FUSE or HACR BRKR	MCA	DISC. SIZE FLA LRA	w/ P.E. (pwrd fr/unit)	MCA	MAX FUSE or HACR BRKR	DISC. SIZE FLA LRA	w/ P.E. (pwrd fr/unit)	MCA	MAX FUSE or HACR BRKR	DISC. SIZE FLA LRA					
50HC*D12	STD	NONE	-	-	50/49	60/60	52/52	279	53/53	60/60	56/56	283	54/54	60/60	57/57	284	58/58	70/70	62/61	288	
		117A	7.8/10.4	21.7/25.0	50/49	60/60	52/52	279/279	53/53	60/60	56/56	283/283	54/54	60/60	57/57	284/284	58/58	70/70	62/61	288/288	
		110A	12.0/16.0	33.4/38.5	51/57	60/60	52/52	279/279	56/62	60/70	56/56	283/283	57/63	60/70	57/58	284/284	62/68	70/70	62/62	288/288	
		112A	24.0/32.0	66.7/77.0	93/105	100/110	85/96	279/279	97/110	100/110	100/110	89/101	283/283	99/111	100/125	90/102	284/284	103/116	110/125	95/106	288/288
		112A+117A	31.8/42.4	88.4/102.0	120/136	125/150	110/125	279/279	125/141	144/134	150/150	114/129	283/283	126/142	150/150	115/131	284/284	131/147	150/150	120/135	288/288
		112A+110A	37.6/50.0	104.2/120.3	140/129	150/150	128/146	279/279	144/134	144/134	150/150	132/151	283/283	146/135	150/150	134/152	284/284	150/140	138/156	150/150	288/288
	MED	NONE	-	-	53/52	60/60	56/55	329	57/56	70/60	60/59	333	58/57	70/70	62/60	334	62/61	70/70	66/65	338	
		117A	7.8/10.4	21.7/25.0	53/52	60/60	56/55	329/329	57/56	70/60	60/59	333/333	58/57	70/70	62/60	334/334	62/61	70/70	66/65	338/338	
		110A	12.0/16.0	33.4/38.5	56/61	60/70	56/56	329/329	60/66	70/70	60/60	333/333	62/67	70/70	62/61	334/334	66/72	70/80	66/65	338/338	
		112A	24.0/32.0	66.7/77.0	97/109	100/110	89/100	329/329	102/114	110/125	93/104	333/333	103/115	110/125	95/105	334/334	108/120	110/125	99/110	338/338	
		112A+117A	31.8/42.4	88.4/102.0	124/140	125/150	114/129	329/329	129/145	150/150	118/133	333/333	130/146	150/150	120/134	334/334	135/151	150/175	124/138	338/338	
		112A+110A	37.6/50.0	104.2/120.3	144/133	150/150	132/150	329/329	149/138	150/150	137/154	333/333	150/139	150/139	138/155	334/334	155/144	175/175	142/160	338/338	
HIGH	NONE	-	-	56/55	60/60	59/58	340	64/63	70/70	64/63	344	61/60	70/70	65/64	345	65/64	80/70	69/68	349		
	117A	7.8/10.4	21.7/25.0	56/55	60/60	59/58	340/340	64/63	70/70	64/63	344/344	61/60	70/70	65/64	345/345	65/64	80/70	69/68	349/349		
	110A	12.0/16.0	33.4/38.5	59/64	60/70	59/59	340/340	64/69	70/70	64/63	344/344	65/70	70/70	65/64	345/345	69/69	80/80	69/69	349/349		
	112A	24.0/32.0	66.7/77.0	101/113	110/125	92/103	340/340	106/117	110/125	97/108	344/344	107/119	110/125	98/109	345/345	112/123	125/125	102/113	349/349		
	112A+117A	31.8/42.4	88.4/102.0	128/144	150/150	117/132	340/340	133/149	150/150	122/136	344/344	134/150	150/150	123/137	345/345	139/155	150/175	127/142	349/349		
	112A+110A	37.6/50.0	104.2/120.3	148/137	150/150	135/153	340/340	152/141	175/175	140/157	344/344	154/143	175/175	141/158	345/345	158/147	175/175	145/163	349/349		
460-3-60	STD	NONE	-	-	25	30	26	134	26	30	28	136	27	30	28	136	29	35	30	138	
		116A	13.9	16.7	26	30	27	134	26	30	28	136	29	30	28	136	31	35	30	138	
		119A	16.5	19.8	30	30	27	134	32	30	29	136	33	30	30	136	35	35	35	138	
		115A	33.0	39.7	55	60	50	134	57	60	60	52	136	58	60	53	136	60	60	138	
		114A+116A	41.7	50.2	68	70	62	134	70	70	70	64	136	71	80	65	136	73	80	138	
		115A+113A	50.0	60.1	80	70	73	134	68	68	80	76	136	68	80	76	136	70	80	138	
50HC*D12	MED	NONE	-	-	26	30	27	159	28	30	29	161	28	30	29	161	28	35	32	163	
		116A	13.9	16.7	27	30	27	159	30	30	29	161	30	30	29	161	30	35	32	163	
		119A	16.5	19.8	31	35	28	159	34	35	30	161	34	35	31	161	36	40	33	163	
		115A	33.0	39.7	56	60	51	159	58	60	60	53	161	59	60	54	161	61	70	56	163
		114A+116A	41.7	50.2	69	70	63	159	72	80	80	65	161	72	80	66	161	74	80	68	163
		115A+113A	50.0	60.1	80	70	75	159	69	69	80	77	161	69	80	77	161	79	80	79	163
460-3-60	HIGH	NONE	-	-	27	30	29	164	29	35	31	166	29	35	31	166	29	35	33	168	
		116A	13.9	16.7	29	30	29	164	32	30	31	166	32	35	31	166	34	35	33	168	
		119A	16.5	19.8	33	35	30	164	35	35	32	166	36	40	33	166	38	40	35	168	
		115A	33.0	39.7	58	60	53	164	60	60	55	166	61	70	56	166	63	70	58	168	
		114A+116A	41.7	50.2	67	80	65	164	73	80	66	166	74	80	68	166	76	80	70	168	
		115A+113A	50.0	60.1	80	70	76	164	71	71	80	79	166	71	80	79	166	74	80	81	168
575-3-60	STD	NONE	-	-	19	25	20	107	23	25	24	111	21	25	22	109	25	30	26	113	
		118A	17.0	20.4	30	30	27	107	35	30	31	111	32	34	29	109	37	40	34	113	
		119A	34.0	40.9	56	60	51	107	61	70	55	111	58	63	60	109	63	70	57	113	
		118A+119A	51.0	61.3	66	70	75	107	71	71	79	111	68	73	80	109	73	80	81	113	
		NONE	-	-	20	25	21	116	24	30	26	120	22	25	23	118	26	30	27	122	
		118A	17.0	20.4	32	35	29	116	36	40	33	120	34	38	35	118	38	40	35	122	
575-3-60	MED	119A	34.0	40.9	57	60	52	116	62	70	57	120	59	60	54	118	64	70	59	122	
		118A+119A	51.0	61.3	67	80	76	116	72	80	80	120	70	80	78	118	74	80	82	122	
		NONE	-	-	22	25	23	130	26	30	27	134	24	25	25	132	28	30	29	136	
		118A	17.0	20.4	34	35	31	130	38	40	35	134	36	40	33	132	41	45	37	136	
		119A	34.0	40.9	59	60	54	130	64	70	56	134	61	70	56	132	66	70	60	136	
		118A+119A	51.0	61.3	70	80	78	130	74	74	80	82	134	72	80	80	132	76	80	84	136

See "Legend and Notes for Tables 72 - 75" on page 141

ELECTRICAL INFORMATION

Table 74 - UNIT WIRE SIZING DATA WITH FACTORY INSTALLED 2 SPEED INDOOR FAN OPTION (cont)

UNIT	NOM. V-PH-HZ	IFM TYPE	ELEC. HTR			NO C.O. or UNPWR C.O.						w/ PWRD C.O.											
			CRHEATER**A00	Nom (kW)	FLA	NO PE.			w/ P.E. (pwrdr fr/unit)			NO PE.			w/ P.E. (pwrdr fr/unit)								
						MCA	MAX FUSE or HACR BRKR	FLA	DISC. SIZE	LRA	MCA	MAX FUSE or HACR BRKR	FLA	DISC. SIZE	LRA	MCA	MAX FUSE or HACR BRKR	FLA	DISC. SIZE	LRA			
STD			NONE	-	-	22	25	23	138	26	30	27	142	24	25	25	25	140	27	30	29	144	
			299A	16.5	15.9	26	30	23	138	31	35	28	142	28	30	30	25	140	33	35	30	144	
			290A+293A	26.5	25.5	38	40	35	138	43	45	39	142	40	40	40	36	140	45	45	41	41	144
			296A	33.5	32.2	46	50	42	138	51	60	47	142	48	50	44	140	53	60	49	60	49	144
			290A+296A	43.5	41.8	58	60	53	138	63	70	58	142	60	60	55	140	65	70	60	70	60	144
293A+296A	50.0	48.1	64	70	60	138	59	60	65	142	56	60	62	140	61	67	67	70	67	70	144		
MED	575-3-60		NONE	-	-	22	25	23	138	26	30	27	142	24	25	25	140	27	30	29	30	144	
			299A	16.5	15.9	26	30	23	138	31	35	28	142	28	30	30	25	140	33	35	30	144	
			290A+293A	26.5	25.5	38	40	35	138	43	45	39	142	40	40	36	140	45	45	41	41	41	144
			296A	33.5	32.2	46	50	42	138	51	60	47	142	48	50	44	140	53	60	49	60	49	144
			290A+296A	43.5	41.8	58	60	53	138	63	70	58	142	60	60	55	140	65	70	60	70	60	144
293A+296A	50.0	48.1	64	70	60	138	59	60	65	142	56	60	62	140	61	67	67	70	67	70	144		
HIGH			NONE	-	-	27	30	28	150	31	35	32	154	29	35	30	152	33	40	34	34	156	
			299A	16.5	15.9	32	35	29	150	36	40	33	154	34	35	31	152	38	40	35	40	35	156
			290A+293A	26.5	25.5	44	45	40	150	48	50	44	154	46	50	42	152	50	60	46	60	46	156
			296A	33.5	32.2	52	60	47	150	57	60	52	154	54	60	49	152	59	60	54	60	54	156
			290A+296A	43.5	41.8	64	70	58	150	69	70	63	154	66	70	60	152	71	80	65	80	65	156
293A+296A	50.0	48.1	60	70	66	150	65	65	70	63	154	62	70	68	152	67	70	72	70	72	156		

See "Legend and Notes for Tables 72 - 75" on page 141

ELECTRICAL INFORMATION

Table 74 - UNIT WIRE SIZING DATA WITH FACTORY INSTALLED 2 SPEED INDOOR FAN OPTION (cont)

(Units Produced On or Prior to 02/15/2015)

UNIT	NO M, V-PH-HZ	ELEC. HTR				NO P.E.				w/ P.E. (pwrd fr/unit)				NO P.E.				w/ PWRD C.O.			
		CHRHEATER ***A00	Nom (KW)	FLA	MCA	MAX FUSE or HACR BRKR	DISC. SIZE		MCA	MAX FUSE or HACR BRKR	DISC. SIZE		MCA	MAX FUSE or HACR BRKR	DISC. SIZE		MCA	MAX FUSE or HACR BRKR	DISC. SIZE		
							FLA	LRA			FLA	LRA			FLA	LRA			FLA	LRA	FLA
50HC*D14 (2-stage cool)		NONE	-	-	59/58	70/70	59/58	311	60/59	70/70	63/62	315	61/60	70/70	64/63	316	65/64	80/80	69/68	320	
		291A	12.4/16.5	34.4/39.7	59/58	70/70	63/62	315/315	60/65	70/70	63/62	315/315	61/66	80/80	64/63	316/316	65/71	80/80	69/68	320/320	
		288A+291A	19.9/26.5	55.3/63.8	73/82	311/311	85/95	315/315	86/96	90/100	79/88	316/316	91/101	100/110	90/100	79/88	316/316	91/101	100/110	83/92	320/320
		294A	25.2/33.5	69.9/80.6	90/102	311/311	103/116	315/315	105/117	110/125	96/107	316/316	109/122	110/125	110/125	96/107	316/316	109/122	110/125	100/112	320/320
		288A+294A	32.7/43.5	90.7/104.7	114/129	311/311	129/146	315/315	131/147	150/150	120/135	316/316	135/152	150/175	150/150	120/135	316/316	135/152	150/175	124/139	320/320
		291A+294A	37.6/50.0	104.3/120.3	130/147	311/311	148/135	315/315	148/137	150/150	135/153	316/316	152/141	175/150	150/150	135/153	316/316	152/141	175/150	140/157	320/320
		NONE	-	-	61/60	335	82/61	339	83/62	80/80	67/66	340	87/66	340	80/80	67/66	340	87/66	80/80	71/70	344
		291A	12.4/16.5	34.4/39.7	61/60	335/335	82/67	339/339	83/68	80/80	67/66	340/340	87/66	340/340	80/80	67/66	340/340	87/66	80/80	71/70	344/344
		288A+291A	19.9/26.5	55.3/63.8	76/85	335/335	88/97	339/339	89/98	90/100	80/89	340/340	82/90	340/340	100/110	82/90	340/340	94/103	100/110	86/95	344/344
		294A	25.2/33.5	69.9/80.6	93/104	335/335	106/118	339/339	107/119	110/125	97/108	340/340	98/109	340/340	125/125	98/109	340/340	112/124	125/125	103/114	344/344
288A+294A	32.7/43.5	90.7/104.7	117/132	335/335	132/148	339/339	133/150	150/150	121/136	340/340	122/137	340/340	150/150	122/137	340/340	138/154	150/175	127/142	344/344		
291A+294A	37.6/50.0	104.3/120.3	132/150	335/335	149/138	339/339	150/139	150/150	137/154	340/340	138/155	340/340	150/150	138/155	340/340	155/144	175/175	142/160	344/344		
		NONE	-	-	72	80	77	354	72	80	77	354	73	80	78	355	77	90	82	359	
		291A	12.4/16.5	34.4/39.7	72/72	350/350	74/80	354/354	75/82	80/80	77/77	354/354	75/82	80/80	78/78	355/355	80/86	90/90	82/82	359/359	
		288A+291A	19.9/26.5	55.3/63.8	87/97	350/350	100/110	354/354	101/112	100/125	91/101	354/354	101/112	110/125	93/102	355/355	106/116	110/125	97/107	359/359	
		294A	25.2/33.5	69.9/80.6	104/116	350/350	118/131	354/354	119/133	125/150	108/121	354/354	119/133	125/150	109/122	355/355	124/137	125/150	114/126	359/359	
		288A+294A	32.7/43.5	90.7/104.7	128/144	350/350	144/162	354/354	145/163	150/175	132/148	354/354	145/163	150/175	133/149	355/355	150/168	150/175	138/154	359/359	
		291A+294A	37.6/50.0	104.3/120.3	149/162	350/350	161/151	354/354	162/152	175/175	148/166	354/354	162/152	175/175	149/167	355/355	167/157	175/175	153/172	359/359	
		NONE	-	-	29	157	30	159	32	35	35	32	159	31	35	32	159	32	40	34	161
		292A	16.5	19.9	29	157	30	159	32	35	35	32	159	33	35	32	159	35	40	34	161
		289A+292A	26.5	31.9	41	157	47	159	48	50	43	159	48	50	50	44	159	50	50	46	161
		295A	33.5	40.3	51	157	58	159	58	60	53	159	58	60	60	53	159	61	70	55	161
289A+295A	43.5	52.3	65	157	73	159	73	80	67	159	73	80	80	67	159	76	80	69	161		
292A+295A	50.0	60.2	74	157	88	159	88	90	76	159	88	90	80	76	159	90	80	78	161		
460-3-60		NONE	-	-	31	40	33	171	31	40	33	171	32	40	33	171	34	40	35	173	
		292A	16.5	19.9	31	169	34	171	34	40	33	171	34	40	33	171	36	40	35	173	
		289A+292A	26.5	31.9	42	169	49	171	49	50	44	171	49	50	45	171	51	60	47	173	
		295A	33.5	40.3	52	169	59	171	60	60	54	171	60	60	55	171	62	70	57	173	
		289A+295A	43.5	52.3	66	169	74	171	75	80	68	171	75	80	68	171	77	80	70	173	
		292A+295A	50.0	60.2	75	169	69	171	70	80	77	171	70	80	77	171	72	80	79	173	
		NONE	-	-	37	176	37	178	37	45	39	178	37	45	39	178	39	45	41	180	
		292A	16.5	19.9	37	176	40	178	41	45	39	178	41	45	39	178	43	45	41	180	
		289A+292A	26.5	31.9	48	176	55	178	56	60	50	178	56	60	60	51	178	58	60	53	180
		295A	33.5	40.3	58	176	66	178	66	70	60	178	66	70	70	61	178	69	70	63	180
289A+295A	43.5	52.3	72	176	81	178	81	90	74	178	81	90	90	74	178	84	90	76	180		
292A+295A	50.0	60.2	81	176	76	178	76	80	83	178	76	80	80	83	178	78	80	86	180		

ELECTRICAL INFORMATION

Table 74 - UNIT WIRE SIZING DATA WITH FACTORY INSTALLED 2 SPEED INDOOR FAN OPTION (cont)

UNIT	NO M. V-PH-HZ	ELEC. HTR			NO C.O. or UNPWR C.O.																			
		CRHEATER ***400	Nom (kW)	FLA	NO PE.					w/ P.E. (pwrdr fr/unit)					NO PE.					w/ PWRD C.O.				
					MCA	MAX FUSE or HACR BRKR	FLA	DISC. SIZE	LRA	MCA	MAX FUSE or HACR BRKR	FLA	DISC. SIZE	LRA	MCA	MAX FUSE or HACR BRKR	FLA	DISC. SIZE	LRA	MCA	MAX FUSE or HACR BRKR	FLA	DISC. SIZE	LRA
50HC*D14 (2-stage cool)	STD	NONE	—	—	24	30	25	128	128	28	30	29	132	132	25	30	27	130	130	29	35	31	134	134
		293A	16.5	15.9	26	30	25	128	128	31	35	29	132	132	28	30	27	130	130	33	35	31	134	134
		290A+293A	26.5	25.5	38	40	35	128	128	43	45	39	132	132	40	40	36	130	130	45	45	41	134	134
		296A	33.5	32.2	46	50	42	128	128	51	60	47	132	132	48	50	44	130	130	53	60	49	134	134
		290A+296A	43.5	41.8	58	60	53	128	128	63	70	58	132	132	60	60	55	130	130	65	70	60	134	134
		293A+296A	50.0	48.1	54	60	60	128	128	59	60	65	132	132	56	60	62	130	130	61	70	67	134	134
575-3-60	MED	NONE	—	—	24	30	25	128	128	28	30	29	132	132	25	30	27	130	130	29	35	31	134	134
		293A	16.5	15.9	26	30	25	128	128	31	35	29	132	132	28	30	27	130	130	33	35	31	134	134
		290A+293A	26.5	25.5	38	40	35	128	128	43	45	39	132	132	40	40	36	130	130	45	45	41	134	134
		296A	33.5	32.2	46	50	42	128	128	51	60	47	132	132	48	50	44	130	130	53	60	49	134	134
		290A+296A	43.5	41.8	58	60	53	128	128	63	70	58	132	132	60	60	55	130	130	65	70	60	134	134
		293A+296A	50.0	48.1	54	60	60	128	128	59	60	65	132	132	56	60	62	130	130	61	70	67	134	134
50HC*D14 (2-stage cool)	HIGH	NONE	—	—	29	35	30	140	140	32	40	34	144	144	30	35	32	142	142	34	40	36	146	146
		293A	16.5	15.9	32	35	30	140	140	36	40	34	144	144	34	35	32	142	142	38	40	36	146	146
		290A+293A	26.5	25.5	44	45	40	140	140	48	50	44	144	144	46	50	42	142	142	50	60	46	146	146
		296A	33.5	32.2	52	60	47	140	140	57	60	52	144	144	54	60	49	142	142	59	60	54	146	146
		290A+296A	43.5	41.8	64	70	58	140	140	69	70	63	144	144	66	70	60	142	142	71	80	65	146	146
		293A+296A	50.0	48.1	60	70	66	140	140	65	70	70	144	144	62	70	68	142	142	67	70	72	146	146

ELECTRICAL INFORMATION

Table 75 – UNIT WIRE SIZING DATA WITH FACTORY INSTALLED HACR BREAKER AND 2 SPEED INDOOR FAN OPTION

UNIT	ELEC. HTR			NO C.O. or UNPWR C.O.								W/ PWRD C.O.															
	IFM TYPE	CRHEATER***A00	Nom (kW)	FLA	NO PE.				w/ P.E. (pwrd fr/unit)				NO PE.				w/ P.E. (pwrd fr/unit)										
					HACR BRKR	MCA	DISC. SIZE FLA LRA	MCA	HACR BRKR	MCA	DISC. SIZE FLA LRA	MCA	HACR BRKR	MCA	DISC. SIZE FLA LRA	MCA	HACR BRKR	MCA	DISC. SIZE FLA LRA								
50HC+D08	STD	NONE	—	—	50/50	40/40	50/50	41/41	195	46/46	199	45/45	50/50	45/45	50/50	46/46	203/203	46/46	50/50	48/48	204	53/52	60/60	48/48	51/51	204	
		117A	7.8/10.4	21.7/25.0	40/40	50/50	41/41	195/195	44/44	50/50	46/46	199/199	45/45	50/50	44/44	50/50	47/47	200/200	45/45	50/50	47/47	200/200	51/51	60/60	49/49	51/51	204/204
		110A	12.0/16.0	33.4/38.5	56/56	60/60	60/60	45/51	195/195	49/55	60/60	199/199	62/62	60/60	60/60	60/60	49/55	200/200	62/62	70/70	51/56	200/200	70/70	66/66	70/70	55/61	204/204
		111A	18.6/24.8	51.7/59.7	82/82	90/90	90/90	66/75	199/199	87/87	90/90	199/199	88/88	90/90	87/87	90/90	70/79	199/199	88/88	90/90	72/81	200/200	90/90	93/93	100/100	96/85	204/204
		112A	24.0/32.0	66.7/77.0	104/104	110/110	110/110	83/95	195/195	88/99	110/110	88/99	110/110	110/110	108/108	110/110	89/101	199/199	110/110	110/110	89/101	200/200	114/114	125/125	98/105	204/204	
		112A+117A	31.8/42.4	88.4/102.0	135/135	150/150	150/150	108/124	195/195	113/128	150/150	113/128	199/199	141/141	140/140	150/150	114/129	200/200	141/141	150/150	114/129	200/200	146/146	150/150	118/134	204/204	
	MED	NONE	—	—	41/41	50/50	41/41	43/43	199	47/47	203	46/46	50/50	45/45	50/50	47/47	203	46/46	50/50	48/48	204	53/52	60/60	50/50	53/52	208	
		117A	7.8/10.4	21.7/25.0	41/41	50/50	41/41	43/43	199/199	47/47	203/203	46/46	50/50	45/45	50/50	47/47	203/203	46/46	50/50	48/48	204/204	53/52	60/60	51/51	53/52	208/208	
		110A	12.0/16.0	33.4/38.5	57/57	60/60	60/60	47/52	199/199	62/62	70/70	51/56	203/203	63/63	62/62	70/70	52/58	204/204	63/63	70/70	52/58	204/204	68/68	70/70	56/62	208/208	
		111A	18.6/24.8	51.7/59.7	84/84	90/90	90/90	68/76	199/199	88/88	90/90	72/81	203/203	90/90	88/88	90/90	73/82	204/204	90/90	90/90	73/82	204/204	94/94	100/100	78/86	208/208	
		112A	24.0/32.0	66.7/77.0	105/105	110/110	110/110	85/96	199/199	111/111	110/110	89/101	203/203	111/111	110/110	110/110	90/102	204/204	111/111	125/125	90/102	204/204	116/116	125/125	96/106	208/208	
		112A+117A	31.8/42.4	88.4/102.0	136/136	150/150	150/150	110/125	199/199	114/129	150/150	114/129	203/203	142/142	141/141	150/150	115/131	204/204	142/142	150/150	115/131	204/204	147/147	150/150	120/135	208/208	
HIGH	NONE	—	—	45/45	50/50	45/45	47/46	249	52/50	253	50/50	49/49	50/50	49/49	52/50	253	50/50	53/53	60/60	53/52	254	57/56	60/60	53/53	258		
	117A	7.8/10.4	21.7/25.0	45/45	50/50	45/45	47/46	249/249	49/49	52/50	253/253	50/50	49/49	49/49	52/50	254/254	55/55	60/60	53/52	254/254	57/56	60/60	53/53	258/258			
	110A	12.0/16.0	33.4/38.5	61/61	70/70	70/70	51/56	249/249	66/66	70/70	253/253	67/67	66/66	66/66	70/70	254/254	72/72	70/70	56/61	254/254	72/72	80/80	61/65	258/258			
	111A	18.6/24.8	51.7/59.7	87/87	90/90	90/90	72/80	249/249	92/92	100/100	76/84	93/93	92/92	92/92	100/100	77/85	254/254	93/93	100/100	77/85	254/254	98/98	100/100	82/90	258/258		
	112A	24.0/32.0	66.7/77.0	109/109	110/110	110/110	89/100	249/249	114/114	125/125	99/104	253/253	115/115	114/114	125/125	99/104	254/254	115/115	125/125	99/104	254/254	120/120	125/125	99/110	258/258		
	112A+117A	31.8/42.4	88.4/102.0	140/140	150/150	150/150	114/129	249/249	145/145	150/150	118/133	253/253	146/146	140/140	150/150	120/134	254/254	146/146	150/150	120/134	254/254	151/151	175/175	124/138	258/258		
460-3-60	STD	NONE	—	—	20	20	19	97	21	99	21	20	20	20	25	25	99	21	25	22	99	25	25	23	24	101	
		116A	13.9	16.7	25	30	25	23	97	27	30	25	27	27	30	25	99	27	30	25	99	30	30	27	27	101	
		113A	16.5	19.8	29	30	26	26	97	28	30	28	31	31	31	35	99	29	32	29	99	34	35	34	35	101	
		114A	27.8	33.4	46	50	42	42	97	44	44	44	48	48	50	44	99	44	49	50	44	99	51	60	46	101	
		115A	33.0	39.7	54	60	49	49	97	51	51	51	56	56	60	49	99	51	56	60	52	99	59	60	54	101	
		114A+116A	41.7	50.2	67	70	61	61	97	63	63	63	69	70	70	63	99	63	70	70	64	99	72	80	66	101	
	MED	NONE	—	—	20	25	20	100	100	22	102	22	21	21	25	25	102	22	25	23	102	25	25	24	25	104	
		116A	13.9	16.7	26	30	24	100	100	26	102	26	28	28	30	25	102	26	28	26	102	28	28	26	27	104	
		113A	16.5	19.8	30	30	27	100	100	29	102	29	33	33	35	35	102	29	33	30	102	35	35	32	32	104	
		114A	27.8	33.4	47	50	43	100	100	45	102	45	50	49	50	44	102	45	50	45	102	50	50	47	47	104	
		115A	33.0	39.7	55	60	50	100	100	52	102	52	58	58	60	50	102	52	58	53	102	60	60	55	55	104	
		114A+116A	41.7	50.2	68	70	62	100	100	64	102	64	70	70	70	63	102	64	71	60	102	73	80	67	67	104	
HIGH	NONE	—	—	21	25	21	125	125	24	127	23	23	23	25	25	127	23	25	24	127	25	25	24	25	129		
	116A	13.9	16.7	27	30	25	125	125	27	127	27	30	30	30	27	127	27	30	27	127	32	35	30	32	129		
	113A	16.5	19.8	31	35	28	125	125	31	127	31	34	34	35	35	127	31	35	31	127	36	40	33	33	129		
	114A	27.8	33.4	48	50	44	125	125	46	127	46	51	51	60	44	127	46	51	47	127	53	60	49	49	129		
	115A	33.0	39.7	56	60	51	125	125	53	127	53	58	58	60	50	127	53	59	54	127	61	70	56	56	129		
	114A+116A	41.7	50.2	69	70	63	125	125	65	127	65	72	72	80	63	127	65	72	66	127	74	80	68	68	129		
STD	NONE	—	—	14	15	14	79	79	18	83	16	16	16	20	20	83	16	19	16	81	19	25	19	21	85		
	118A	17.0	20.4	29	30	27	79	79	31	83	32	32	32	35	35	83	32	35	29	81	36	40	33	33	85		
	119A	34.0	40.9	55	60	50	79	79	60	83	57	60	60	60	55	83	57	60	52	81	62	70	57	57	85		
	NONE	—	—	15	20	15	83	83	18	87	16	16	16	20	20	87	16	20	17	85	20	25	21	21	89		
	118A	17.0	20.4	30	30	27	83	83	35	87	32	32	32	35	35	87	32	35	29	85	37	40	34	34	89		
	119A	34.0	40.9	56	60	51	83	83	61	87	58	61	61	70	70	87	58	60	53	85	63	70	57	57	89		
MED	NONE	—	—	16	20	16	92	92	19	96	17	17	17	25	25	96	17	20	18	94	21	25	23	23	98		
	118A	17.0	20.4	32	35	29	92	92	36	96	34	34	34	40	40	96	34	35	31	94	38	40	35	35	98		
	119A	34.0	40.9	57	60	52	92	92	62	96	59	62	62	70	70	96	59	60	54	94	64	70	59	59	98		
	NONE	—	—	16	20	16	92	92	19	96	17	17	17	25	25	96	17	20	18	94	21	25	23	23	98		
	118A	17.0	20.4	32	35	29	92	92	36	96	34	34	34	40	40	96	34	35	31	94	38	40	35	35	98		
	119A	34.0	40.9	57	60	5																					

ELECTRICAL INFORMATION

Table 75 - UNIT WIRE SIZING DATA WITH FACTORY INSTALLED HACR BREAKER AND 2 SPEED INDOOR FAN OPTION (cont)

UNIT	IFM TYPE	ELEC. HTR				NO C.O. or UNPWR C.O.												w/ PWRD C.O.					
		CRHEATER***A00	Nom (kW)	FLA	MCA	NO PE.			w/ RE. (pwrd fr/unit)			NO PE.			w/ PWRD C.O.			w/ PWRD C.O.					
						HACR BRKR	DISC. SIZE FLA LRA	MCA	HACR BRKR	DISC. SIZE FLA LRA	MCA	HACR BRKR	DISC. SIZE FLA LRA	MCA	HACR BRKR	DISC. SIZE FLA LRA	MCA						
208/230-3-60	STD	NONE	-	-	40/40	50/50	42/41	195	44/44	50/50	46/46	199	45/45	50/50	47/47	200	49/49	60/60	52/51	204			
		117A	7.8/10.4	21.7/25.0	40/40	50/50	42/41	195/195	44/44	50/50	46/46	199/199	45/45	50/50	47/47	200/200	49/49	60/60	52/51	204/204			
		110A	12.0/16.0	33.4/38.5	56/56	60/60	45/51	195/195	60/60	60/60	49/55	199/199	62/62	70/70	51/56	200/200	66/66	70/70	55/61	204/204			
		111A	18.6/24.8	51.7/59.7	82/82	90/90	66/75	195/195	87/87	90/90	70/79	199/199	88/88	90/90	72/81	200/200	93/93	100/100	76/85	204/204			
		112A	24.0/32.0	66.7/77.0	104/104	110/110	83/95	195/195	108/108	110/110	88/99	199/199	110/110	110/110	89/101	200/200	114/114	125/125	93/105	204/204			
		112A+117A	31.8/42.4	88.4/102.0	135/135	150/150	108/124	195/195	140/140	150/150	113/128	199/199	141/141	150/150	114/129	200/200	146/146	150/150	118/134	204/204			
	MED	NONE	-	-	41/41	50/50	43/43	199	45/45	50/50	47/47	203	46/46	50/50	48/48	204	50/50	60/60	53/53	208			
		117A	7.8/10.4	21.7/25.0	41/41	50/50	43/43	199/199	45/45	50/50	47/47	203/203	46/46	50/50	48/48	204/204	51/51	60/60	53/53	208/208			
		110A	12.0/16.0	33.4/38.5	57/57	60/60	47/52	199/199	62/62	70/70	51/56	203/203	63/63	70/70	52/58	204/204	68/68	70/70	56/62	208/208			
		111A	18.6/24.8	51.7/59.7	84/84	90/90	68/76	199/199	88/88	90/90	72/81	203/203	90/90	90/90	73/82	204/204	94/94	100/100	78/86	208/208			
		112A	24.0/32.0	66.7/77.0	105/105	110/110	85/96	199/199	110/110	110/110	88/101	203/203	111/111	125/125	90/102	204/204	116/116	125/125	96/106	208/208			
		112A+117A	31.8/42.4	88.4/102.0	136/136	150/150	110/125	199/199	141/141	150/150	114/129	203/203	142/142	150/150	115/131	204/204	147/147	150/150	120/135	208/208			
460-3-60	STD	NONE	-	-	45/45	50/50	47/46	249	49/49	60/60	52/51	253	50/50	60/60	53/52	254	54/54	60/60	57/56	258			
		117A	7.8/10.4	21.7/25.0	45/45	50/50	47/46	249/249	49/49	60/60	52/51	253/253	50/50	60/60	53/52	254/254	55/55	60/60	57/56	258/258			
		110A	12.0/16.0	33.4/38.5	61/61	70/70	51/56	249/249	66/66	70/70	55/60	253/253	67/67	70/70	56/61	254/254	72/72	80/80	61/65	258/258			
		111A	18.6/24.8	51.7/59.7	87/87	90/90	72/80	249/249	92/92	100/100	76/84	253/253	93/93	100/100	77/85	254/254	98/98	100/100	82/90	258/258			
		112A	24.0/32.0	66.7/77.0	109/109	110/110	89/100	249/249	114/114	125/125	93/104	253/253	115/115	125/125	95/105	254/254	120/120	125/125	99/110	258/258			
		112A+117A	31.8/42.4	88.4/102.0	140/140	150/150	114/129	249/249	145/145	150/150	118/133	253/253	146/146	150/150	120/134	254/254	151/151	175/175	124/138	258/258			
	MED	NONE	-	-	19	25	19	97	21	25	22	99	21	25	22	99	23	25	24	24			
		116A	13.9	16.7	25	25	23	97	27	30	25	99	28	30	25	99	29	30	30	27			
		113A	16.5	19.8	29	30	26	97	31	35	28	99	32	35	29	99	33	35	31	31			
		114A	27.8	33.4	46	50	42	97	48	50	44	99	49	50	44	99	51	60	46	46			
		115A	33.0	39.7	54	60	49	97	56	60	51	99	56	60	52	99	59	60	54	54			
		114A+116A	41.7	50.2	67	70	61	97	63	70	63	99	70	70	64	99	72	80	66	66			
575-3-60	STD	NONE	-	-	20	25	20	100	22	25	102	22	25	23	102	24	25	25	25				
		116A	13.9	16.7	26	30	24	100	28	30	26	102	29	30	26	102	31	35	28	28			
		113A	16.5	19.8	30	30	27	100	32	35	29	102	33	35	30	102	35	35	32	32			
		114A	27.8	33.4	47	50	43	100	49	50	45	102	50	50	45	102	52	60	47	47			
		115A	33.0	39.7	55	60	50	100	57	60	52	102	58	60	53	102	60	60	55	55			
		114A+116A	41.7	50.2	68	70	62	100	70	70	64	102	71	80	65	102	73	80	67	67			
	HIGH	NONE	-	-	21	25	22	125	23	25	24	127	23	25	24	127	25	30	26	26			
		116A	13.9	16.7	27	30	25	125	30	30	27	127	30	30	27	127	32	35	29	29			
		113A	16.5	19.8	31	35	28	125	34	35	30	127	34	35	31	127	36	40	33	33			
		114A	27.8	33.4	48	50	44	125	51	60	46	127	51	60	47	127	53	60	49	49			
		115A	33.0	39.7	56	60	51	125	58	60	53	127	59	60	54	127	61	70	56	56			
		114A+116A	41.7	50.2	69	70	63	125	72	80	65	127	72	80	66	127	74	80	68	68			
MED	NONE	-	-	15	20	16	79	19	20	18	83	17	20	18	81	21	25	22	22				
	118A	17.0	20.4	29	30	27	79	34	35	31	83	32	35	29	81	36	40	33	33				
	119A	34.0	40.9	55	60	50	79	60	60	55	83	57	60	52	81	62	70	57	57				
	NONE	-	-	16	20	16	83	20	25	21	87	18	20	18	85	21	25	23	23				
	118A	17.0	20.4	30	30	27	83	35	35	32	87	32	35	29	85	37	40	34	34				
	119A	34.0	40.9	56	60	51	83	60	70	55	87	58	60	53	85	63	70	57	57				
HIGH	NONE	-	-	17	20	18	92	21	25	22	96	19	20	20	94	22	25	24	24				
	118A	17.0	20.4	32	35	29	92	36	40	33	96	34	35	31	94	38	40	35	35				
	119A	34.0	40.9	57	60	52	92	62	70	57	96	59	60	54	94	64	70	59	59				

See "Legend and Notes for Tables 72 - 75" on page 141

ELECTRICAL INFORMATION
Table 75 – UNIT WIRE SIZING DATA WITH FACTORY INSTALLED HACR BREAKER AND 2 SPEED INDOOR FAN OPTION (cont)

UNIT	NOM. V-PH-HZ	ELEC. HTR		NO P.E.				w/ P.E. (pwrd fr/unit)				NO P.E.				w/ PWRD C.O.						
		IFIM TYPE	CRHEATER***A00	Nom (kW)	FLA	MCA	HACR BRKR	DISC. SIZE		MCA	HACR BRKR	DISC. SIZE		MCA	HACR BRKR	DISC. SIZE		MCA	HACR BRKR	DISC. SIZE		
								FLA	LRA			FLA	LRA			FLA	LRA			FLA	LRA	FLA
50HC*D12	STD	NONE	—	—	—	50/50	60/60	52/52	279	53/53	60/60	56/56	283	54/54	60/60	57/57	284	58/58	70/70	62/61	288	
		117A	7.8/10.4	21.7/25.0	—	50/50	60/60	52/52	279/279	53/53	60/60	56/56	283/283	54/54	60/60	57/57	284	58/58	70/70	62/61	288	
		110A	12.0/16.0	33.4/38.5	—	57/57	60/60	52/52	279/279	53/53	60/60	56/56	283/283	63/63	70/70	57/57	284/284	68/68	80/80	66/65	288/288	
		112A	24.0/32.0	66.7/77.0	—	105/105	110/110	85/86	279/279	110/110	110/110	89/101	283/283	111/111	125/125	150/150	116/116	116/116	125/125	150/150	95/106	288/288
		112A+117A	31.8/42.4	88.4/102.0	—	136/136	150/150	110/125	279/279	141/141	141/141	114/129	283/283	142/142	150/150	147/147	147/147	147/147	150/150	120/135	288/288	
		112A+110A	37.6/50.0	104.2/120.3	—	140/140	150/150	128/146	279/279	144/144	144/144	132/151	283/283	146/146	150/150	150/150	150/150	150/150	150/150	138/156	288/288	
	MED	NONE	—	—	—	—	53/53	60/60	56/55	329	57/57	70/70	60/59	333	62/62	70/70	62/60	334	66/65	80/80	69/68	338
		117A	7.8/10.4	21.7/25.0	—	53/53	60/60	56/55	329/329	57/57	70/70	60/59	333/333	58/58	70/70	62/60	334/334	62/62	70/70	66/65	80/80	69/68
		110A	12.0/16.0	33.4/38.5	—	61/61	70/70	56/56	329/329	66/66	70/70	60/60	333/333	67/67	70/70	62/61	334/334	72/72	80/80	66/65	80/80	69/68
		112A	24.0/32.0	66.7/77.0	—	109/109	110/110	89/100	329/329	114/114	114/114	125/125	333/333	115/115	125/125	150/150	120/120	120/120	125/125	150/150	99/110	338/338
		112A+117A	31.8/42.4	88.4/102.0	—	140/140	150/150	114/129	329/329	145/145	145/145	118/133	333/333	146/146	150/150	120/134	334/334	151/151	124/138	155/155	175/175	142/138
		112A+110A	37.6/50.0	104.2/120.3	—	144/144	150/150	132/150	329/329	149/149	149/149	137/154	333/333	150/150	150/150	138/155	334/334	155/155	142/160	155/155	175/175	142/160
		NONE	—	—	—	56/56	60/60	59/58	340	60/60	60/60	70/70	64/63	344	61/61	70/70	65/64	345	65/65	80/80	69/68	349
HIGH	117A	7.8/10.4	21.7/25.0	—	56/56	60/60	59/58	340/340	60/60	60/60	64/63	344/344	61/61	70/70	65/64	345/345	65/65	80/80	69/68	80/80	69/68	
	110A	12.0/16.0	33.4/38.5	—	64/64	70/70	59/59	340/340	69/69	70/70	64/63	344/344	70/70	70/70	65/64	345/345	75/75	80/80	69/69	80/80	69/69	
	112A	24.0/32.0	66.7/77.0	—	113/113	125/125	92/103	340/340	117/117	125/125	99/108	344/344	119/119	125/125	123/123	345/345	123/123	125/125	102/113	102/113	102/113	
	112A+117A	31.8/42.4	88.4/102.0	—	144/144	150/150	117/132	340/340	149/149	149/149	122/136	344/344	150/150	150/150	123/137	345/345	155/155	127/142	127/142	127/142	127/142	
	112A+110A	37.6/50.0	104.2/120.3	—	148/148	150/150	135/152	340/340	152/152	152/152	140/157	344/344	154/154	175/175	141/158	345/345	158/158	145/163	145/163	145/163	145/163	
	NONE	—	—	—	25	30	26	134	26	26	30	28	136	27	30	28	136	29	30	35	30	138
	116A	13.9	16.7	—	28	30	26	134	28	28	30	28	136	29	30	28	136	31	35	35	30	138
STD	113A	16.5	19.8	—	32	30	27	134	32	32	35	29	136	33	30	136	35	35	35	32	138	
	115A	33.0	39.7	—	55	60	50	134	57	60	60	136	58	60	53	136	60	60	60	55	138	
	115A+116A	41.7	50.2	—	68	70	62	134	70	70	70	136	64	80	65	136	73	80	67	138		
	115A+113A	50.0	60.1	—	65	70	73	134	68	80	80	136	68	80	76	136	70	80	78	138		
	NONE	—	—	—	26	30	27	159	28	28	30	29	161	28	30	29	161	30	35	32	163	
	116A	13.9	16.7	—	27	30	27	159	30	30	30	29	161	30	30	29	161	32	35	32	163	
	113A	16.5	19.8	—	31	35	28	159	34	34	35	30	161	34	35	31	161	36	40	33	163	
MED	115A	33.0	39.7	—	56	60	51	159	58	60	53	161	59	60	54	161	61	70	56	56	163	
	114A+116A	41.7	50.2	—	69	70	63	159	72	80	65	161	72	80	66	161	74	80	68	68	163	
	115A+113A	50.0	60.1	—	67	80	75	159	69	80	77	161	69	80	77	161	72	80	79	79	163	
	NONE	—	—	—	27	30	29	164	29	29	35	166	29	35	31	166	31	35	35	33	168	
	116A	13.9	16.7	—	29	30	29	164	32	32	35	166	32	35	31	166	34	35	35	33	168	
	113A	16.5	19.8	—	33	35	30	164	35	35	35	166	36	40	33	166	38	40	40	35	168	
	115A	33.0	39.7	—	58	60	53	164	60	60	55	166	61	70	56	166	63	70	58	58	168	
HIGH	114A+116A	41.7	50.2	—	71	80	65	164	73	80	67	166	74	80	68	166	76	80	70	70	168	
	115A+113A	50.0	60.1	—	69	80	76	164	71	80	79	166	71	80	79	166	74	80	81	81	168	
	NONE	—	—	—	19	25	20	107	23	25	24	111	21	25	22	109	25	26	26	26	113	
	118A	17.0	20.4	—	30	30	27	107	35	35	35	111	32	35	29	109	37	40	34	34	113	
	119A	34.0	40.9	—	56	60	51	107	61	60	53	109	58	60	53	109	63	70	57	57	113	
	118A+119A	51.0	61.3	—	66	70	75	107	71	80	79	111	68	80	76	109	73	80	81	81	113	
	NONE	—	—	—	20	25	21	116	24	24	30	120	22	25	23	118	26	30	30	27	122	
STD	118A	17.0	20.4	—	32	35	29	116	36	40	33	120	34	35	31	118	38	40	35	35	122	
	119A	34.0	40.9	—	57	60	52	116	62	70	57	120	59	60	54	118	64	70	59	59	122	
	118A+119A	51.0	61.3	—	67	80	76	116	72	80	80	120	70	80	78	118	74	80	82	82	122	
	NONE	—	—	—	22	25	23	130	26	26	30	134	24	25	25	132	28	30	29	29	136	
	118A	17.0	20.4	—	34	35	31	130	38	40	35	134	36	40	33	132	41	45	37	37	136	
	119A	34.0	40.9	—	59	60	54	130	64	70	59	134	61	70	56	132	66	70	60	60	136	
	118A+119A	51.0	61.3	—	70	80	78	130	74	80	80	134	72	80	80	132	76	80	84	84	136	

See "Legend and Notes for Tables 72 – 75" on page 141

ELECTRICAL INFORMATION

Table 75 - UNIT WIRE SIZING DATA WITH FACTORY INSTALLED HACR BREAKER AND 2 SPEED INDOOR FAN OPTION (cont)
(Units Produced On or After 02/16/2015)

UNIT	ELEC. HTR			NO C.O. or UNPWR C.O.						W/ PWRD C.O.									
	IFM TYPE	CRHEATER**A00	Nom (kW)	FLA	NO PE.			w/ P.E. (pwrd fr/unit)			NO PE.			w/ P.E. (pwrd fr/unit)					
					HACR BRKR	MCA	DISC. SIZE	HACR BRKR	MCA	DISC. SIZE	HACR BRKR	MCA	DISC. SIZE	HACR BRKR	MCA	DISC. SIZE			
208,230-3-60	STD	NONE	-	-	60/59	337	341	65/64	80/70	61/61	62/62	80/80	66/65	342	66/65	80/80	66/65	70/69	346
		291A	12.4/16.5	34.4/39.7	60/59	337/337	341/341	65/64	80/70	61/65	62/66	80/80	66/65	342/342	66/71	80/80	66/71	70/69	346/346
		288A+291A	19.9/26.5	55.3/63.8	73/82	337/337	341/341	78/87	90/100	85/95	86/96	90/100	96/107	342/342	91/101	100/110	83/92	83/92	346/346
		294A	25.2/33.5	69.9/80.6	90/102	337/337	341/341	95/106	110/125	103/116	105/117	110/125	110/125	342/342	109/122	110/125	100/112	100/112	346/346
		288A+294A	32.7/43.5	90.7/104.7	114/129	337/337	341/341	119/134	150/150	129/146	131/147	150/150	120/135	342/342	135/152	150/175	124/139	124/139	346/346
		291A+294A	37.6/50.0	104.3/120.3	130/147	337/337	341/341	134/152	150/150	146/135	148/137	150/150	135/153	342/342	152/141	175/150	140/157	140/157	346/346
	MED	NONE	-	-	63/62	361	365	67/66	80/80	64/63	65/64	80/80	68/67	366	68/67	80/80	68/67	73/71	370
		291A	12.4/16.5	34.4/39.7	63/62	361/361	365/365	67/66	80/80	64/67	65/68	80/80	68/67	366/366	78/73	80/80	73/71	370/370	
		288A+291A	19.9/26.5	55.3/63.8	76/85	361/361	365/365	80/89	90/100	88/97	89/98	90/100	82/90	366/366	94/103	100/110	86/95	370/370	
		294A	25.2/33.5	69.9/80.6	93/104	361/361	365/365	97/108	110/125	106/118	107/119	110/125	98/109	366/366	112/124	125/125	103/114	370/370	
		288A+294A	32.7/43.5	90.7/104.7	117/132	361/361	365/365	121/136	150/150	132/148	135/150	150/150	122/137	366/366	138/154	150/175	127/142	370/370	
		291A+294A	37.6/50.0	104.3/120.3	132/150	361/361	365/365	137/154	150/150	149/138	150/139	150/150	138/155	366/366	155/144	175/175	142/160	370/370	
50HC+D14	HIGH	NONE	-	-	74	376	380	78	80	73	74	80	79	381	79	80	84	385	
		291A	12.4/16.5	34.4/39.7	74/74	376/376	380/380	78/78	80/80	74/80	75/82	80/80	79/79	381/381	80/86	90/90	84/84	385/385	
		288A+291A	19.9/26.5	55.3/63.8	87/97	376/376	380/380	91/101	100/125	100/110	101/112	110/125	93/102	381/381	106/116	110/125	97/107	385/385	
		294A	25.2/33.5	69.9/80.6	104/116	376/376	380/380	108/121	125/150	118/131	119/133	125/150	109/122	381/381	124/137	125/150	114/126	385/385	
		288A+294A	32.7/43.5	90.7/104.7	128/144	376/376	380/380	132/148	150/175	144/162	145/163	150/175	133/149	381/381	150/168	150/175	138/154	385/385	
		291A+294A	37.6/50.0	104.3/120.3	143/162	376/376	380/380	148/166	175/175	161/151	162/152	175/175	149/167	381/381	167/157	175/175	153/172	385/385	
	STD	NONE	-	-	26	165	167	28	30	27	27	30	29	167	29	30	31	169	
		292A	16.5	19.9	27	165	167	29	35	32	33	35	30	167	35	35	32	169	
		289A+292A	26.5	31.9	41	165	167	43	50	47	48	50	44	167	50	50	46	169	
		295A	33.5	40.3	51	165	167	53	60	58	58	60	53	167	61	70	55	169	
		289A+295A	43.5	52.3	65	165	167	67	80	73	73	80	67	167	76	80	69	169	
		292A+295A	50.0	60.2	74	165	167	76	80	68	68	80	76	167	70	80	78	169	
460-3-60	MED	NONE	-	-	27	177	179	29	30	28	28	30	179	30	30	32	181		
		292A	16.5	19.9	29	177	179	31	35	34	34	35	31	179	36	40	33	181	
		289A+292A	26.5	31.9	42	177	179	44	50	49	49	50	45	179	51	60	47	181	
		295A	33.5	40.3	52	177	179	54	60	59	60	60	55	179	62	70	57	181	
		289A+295A	43.5	52.3	66	177	179	68	80	75	75	80	68	179	77	80	70	181	
		292A+295A	50.0	60.2	75	177	179	77	80	69	70	80	77	179	72	80	79	181	
HIGH	NONE	-	-	33	184	186	35	40	34	34	40	36	186	36	45	38	188		
	292A	16.5	19.9	35	184	186	37	40	40	41	45	37	186	43	45	39	188		
	289A+292A	26.5	31.9	48	184	186	50	60	55	56	60	51	186	58	60	53	188		
	295A	33.5	40.3	58	184	186	60	70	66	66	70	61	186	69	70	63	188		
	289A+295A	43.5	52.3	72	184	186	74	80	81	81	90	74	186	84	90	76	188		
	292A+295A	50.0	60.2	81	184	186	83	80	76	76	80	83	186	78	80	86	188		

See "Legend and Notes for Tables 72 - 75" on page 141

ELECTRICAL INFORMATION

Table 75 - UNIT WIRE SIZING DATA WITH FACTORY INSTALLED HACR BREAKER AND 2 SPEED INDOOR FAN OPTION (cont)

UNIT	NOM. V-PH-HZ	ELEC. HTR			NO C.O. or UNPWR C.O.						w/ PWRD C.O.											
		IFM TYPE	Nom (kW)	FLA	NO PE.			w/ PE. (pwrdr fr/unit)			NO PE.			w/ PE. (pwrdr fr/unit)								
					MCA	HACR BRKR	DISC. SIZE FLA LRA	MCA	HACR BRKR	DISC. SIZE FLA LRA	MCA	HACR BRKR	DISC. SIZE FLA LRA	MCA	HACR BRKR	DISC. SIZE FLA LRA						
50HC'D14	575-3-60	STD	—	—	—	22	25	23	138	26	30	27	142	24	25	25	140	27	30	29	144	
			293A	15.9	15.9	26	30	23	138	31	35	28	142	28	30	25	140	33	35	30	144	
			290A+293A	26.5	25.5	38	40	35	138	43	45	39	142	40	40	36	140	45	45	41	41	144
			296A	33.5	32.2	46	50	42	138	51	60	47	142	48	50	44	140	53	60	49	49	144
			290A+296A	43.5	41.8	58	60	53	138	63	70	58	142	60	60	55	140	65	70	60	60	144
			293A+296A	50.0	48.1	54	60	60	138	59	60	65	142	56	60	62	140	61	70	67	70	67
50HC'D14	575-3-60	MED	—	—	—	22	25	23	138	26	30	27	142	24	25	25	140	27	30	29	144	
			293A	16.5	15.9	26	30	23	138	31	35	28	142	28	30	25	140	33	35	30	144	
			290A+293A	26.5	25.5	38	40	35	138	43	45	39	142	40	40	36	140	45	45	41	41	144
			296A	33.5	32.2	46	50	42	138	51	60	47	142	48	50	44	140	53	60	49	49	144
			290A+296A	43.5	41.8	58	60	53	138	63	70	58	142	60	60	55	140	65	70	60	60	144
			293A+296A	50.0	48.1	54	60	60	138	59	60	65	142	56	60	62	140	61	70	67	70	67
50HC'D14	575-3-60	HIGH	—	—	—	27	30	28	150	31	35	32	154	29	35	30	152	33	40	34	156	
			293A	16.5	15.9	32	35	29	150	36	40	33	154	34	35	31	152	38	40	35	156	
			290A+293A	26.5	25.5	44	45	40	150	48	50	44	154	46	50	42	152	50	60	46	46	156
			296A	33.5	32.2	52	60	47	150	57	60	52	154	54	60	49	152	59	60	54	54	156
			290A+296A	43.5	41.8	64	70	58	150	69	70	63	154	66	70	60	152	71	80	65	65	156
			293A+296A	50.0	48.1	60	70	66	150	65	60	70	63	154	62	70	68	67	70	72	70	72

See "Legend and Notes for Tables 72 – 75" on page 141

ELECTRICAL INFORMATION

Table 75 - UNIT WIRE SIZING DATA WITH FACTORY INSTALLED HACR BREAKER AND 2 SPEED INDOOR FAN OPTION (cont)

(Units Produced On or Prior to 02/15/2015)

UNIT	NO M. V-PH-HZ	IFM TYPE	ELEC. HTR			NO C.O. or UNPWR C.O.						w/ PWRD C.O.					
			CRHEATER ***400	Nom (kW)	FLA	NO P.E.			w/ P.E. (pwrd fr/unit)			NO P.E.			w/ P.E. (pwrd fr/unit)		
						MCA	HACR BRKR	DISC. SIZE	MCA	HACR BRKR	DISC. SIZE	MCA	HACR BRKR	DISC. SIZE	MCA	HACR BRKR	DISC. SIZE
50HC*D14 (2-stage cool)	208/230-3-60	STD	NONE	-	-	59/58	70/70	63/62	315	61/61	70/70	64/63	316	65/65	80/80	69/68	320
			291A	12.4/16.5	34.4/39.7	59/58	70/70	63/62	315/315	66/66	70/70	64/63	316/316	71/71	80/80	69/68	320/320
			288A+291A	19.9/26.5	55.3/63.8	73/82	100/100	78/87	315/315	96/96	100/100	79/88	316/316	101/101	110/110	83/82	320/320
			294A	25.2/33.5	69.9/80.6	90/102	125/125	95/106	315/315	117/117	125/125	96/107	316/316	122/122	125/125	100/112	320/320
			288A+294A	32.7/43.5	90.7/104.7	114/129	150/150	119/134	315/315	147/147	150/150	120/135	316/316	152/152	175/175	124/139	320/320
			291A+294A	37.6/50.0	104.3/120.3	130/147	150/150	134/152	315/315	148/148	150/150	135/153	316/316	152/152	175/175	140/157	320/320
	208/230-3-60	MED	NONE	-	-	61/60	70/70	66/65	339	63/63	80/80	67/66	340	67/67	80/80	71/70	344
			291A	12.4/16.5	34.4/39.7	61/60	70/70	66/65	339/339	68/68	80/80	67/66	340/340	73/73	80/80	71/70	344/344
			288A+291A	19.9/26.5	55.3/63.8	76/85	100/100	80/89	339/339	98/98	100/100	82/90	340/340	103/103	110/110	86/85	344/344
			294A	25.2/33.5	69.9/80.6	93/104	125/125	97/108	339/339	119/119	125/125	98/109	340/340	124/124	125/125	103/114	344/344
			288A+294A	32.7/43.5	90.7/104.7	117/132	150/150	121/136	339/339	150/150	150/150	122/137	340/340	154/154	175/175	127/142	344/344
			291A+294A	37.6/50.0	104.3/120.3	132/150	150/150	137/154	339/339	150/150	150/150	138/155	340/340	155/155	175/175	142/160	344/344
460-3-60	HIGH	NONE	-	-	72	80	77	354	73	80	78	355	77	90	82	359	
		291A	12.4/16.5	34.4/39.7	72/72	80/80	77/77	354/354	82/82	90/90	78/78	355/355	86/86	90/90	82/82	359/359	
		288A+291A	19.9/26.5	55.3/63.8	87/97	110/110	91/101	354/354	112/112	125/125	93/102	355/355	116/116	125/125	97/107	359/359	
		294A	25.2/33.5	69.9/80.6	104/116	150/150	108/121	354/354	133/133	150/150	109/122	355/355	137/137	150/150	114/126	359/359	
		288A+294A	32.7/43.5	90.7/104.7	128/144	175/175	132/148	354/354	163/163	175/175	133/149	355/355	168/168	175/175	138/154	359/359	
		291A+294A	37.6/50.0	104.3/120.3	143/162	175/175	148/166	354/354	162/162	175/175	149/167	355/355	167/167	175/175	153/172	359/359	
460-3-60	STD	NONE	-	-	29	35	32	159	31	35	32	159	32	40	34	161	
		292A	16.5	19.9	29	35	32	159	33	35	32	159	35	40	34	161	
		289A+292A	26.5	31.9	41	45	43	159	48	50	44	159	50	50	46	161	
		295A	33.5	40.3	51	60	53	159	58	60	53	159	61	70	55	161	
		289A+295A	43.5	52.3	65	80	67	159	73	80	67	159	76	80	69	161	
		292A+295A	50.0	60.2	74	80	76	159	68	80	76	159	70	80	78	161	
460-3-60	MED	NONE	-	-	31	35	33	171	32	40	33	171	34	40	35	173	
		292A	16.5	19.9	31	35	33	171	34	40	33	171	36	40	35	173	
		289A+292A	26.5	31.9	42	50	44	171	49	50	45	171	51	60	47	173	
		295A	33.5	40.3	52	60	54	171	60	60	55	171	62	70	57	173	
		289A+295A	43.5	52.3	66	80	68	171	75	80	68	171	77	80	70	173	
		292A+295A	50.0	60.2	75	80	77	171	70	80	77	171	72	80	79	173	
460-3-60	HIGH	NONE	-	-	37	40	39	178	37	45	39	178	39	45	41	180	
		292A	16.5	19.9	37	40	39	178	41	45	39	178	43	45	41	180	
		289A+292A	26.5	31.9	48	60	50	178	56	60	51	178	58	60	53	180	
		295A	33.5	40.3	58	70	60	178	66	70	61	178	69	70	63	180	
		289A+295A	43.5	52.3	72	80	74	178	81	80	74	178	84	80	76	180	
		292A+295A	50.0	60.2	81	80	83	178	76	80	83	178	78	80	86	180	

ELECTRICAL INFORMATION

Table 75 - UNIT WIRE SIZING DATA WITH FACTORY INSTALLED HACR BREAKER AND 2 SPEED INDOOR FAN OPTION (cont)

UNIT	NO M. V-PH-HZ	ELEC. HTR			NO C.O. or UNPWR C.O.																										
		CRHEATER ***400	Nom (kW)	FLA	NO PE.			w/ P.E. (pwrdr fr/unit)			NO PE.			w/ PWR C.O.																	
					MCA	HACR BRKR	DISC. SIZE FLA LRA	MCA	HACR BRKR	DISC. SIZE FLA LRA	MCA	HACR BRKR	DISC. SIZE FLA LRA	MCA	HACR BRKR	DISC. SIZE FLA LRA															
STD		NONE	-	-	24	30	25	128	28	30	29	132	25	30	27	130	29	35	29	35	27	130	29	35	27	130	29	35	27	130	
		293A	16.5	15.9	26	30	25	128	31	35	29	132	28	30	27	130	33	35	29	35	27	130	33	35	27	130	33	35	27	130	
		290A+293A	26.5	25.5	38	40	35	128	43	45	39	132	40	40	40	36	130	45	45	36	40	36	130	45	45	36	130	45	45	36	130
		296A	33.5	32.2	46	50	42	128	51	60	47	132	48	50	44	130	53	60	44	50	44	130	53	60	44	130	53	60	44	130	
		290A+296A	43.5	41.8	58	60	53	128	63	70	58	132	60	60	60	55	130	65	70	55	60	55	130	65	70	55	130	65	70	55	130
		293A+296A	50.0	48.1	54	60	60	128	59	60	60	65	132	56	60	62	130	61	70	62	60	62	130	61	70	62	130	61	70	62	130
MED		NONE	-	-	24	30	25	128	28	30	29	132	25	30	27	130	29	35	29	35	27	130	25	30	27	130	29	35	27	130	
		293A	16.5	15.9	26	30	25	128	31	35	29	132	28	30	27	130	33	35	29	35	27	130	33	35	27	130	33	35	27	130	
		290A+293A	26.5	25.5	38	40	35	128	43	45	39	132	40	40	36	130	45	45	36	40	36	130	45	45	36	130	45	45	36	130	
		296A	33.5	32.2	46	50	42	128	51	60	47	132	48	50	44	130	53	60	44	50	44	130	53	60	44	130	53	60	44	130	
		290A+296A	43.5	41.8	58	60	53	128	63	70	58	132	60	60	60	55	130	65	70	55	60	55	130	65	70	55	130	65	70	55	130
		293A+296A	50.0	48.1	54	60	60	128	59	60	60	65	132	56	60	62	130	61	70	62	60	62	130	61	70	62	130	61	70	62	130
HIGH		NONE	-	-	29	35	30	140	32	40	34	144	30	35	32	142	34	40	34	40	32	142	30	35	32	142	34	40	32	142	
		293A	16.5	15.9	32	35	30	140	36	40	34	144	34	35	32	142	38	40	34	40	32	142	38	40	32	142	38	40	32	142	
		290A+293A	26.5	25.5	44	45	40	140	48	50	44	144	46	50	42	142	50	60	42	50	42	142	50	60	42	142	50	60	42	142	
		296A	33.5	32.2	52	60	47	140	57	60	52	144	54	60	49	142	59	60	49	60	49	142	59	60	49	142	59	60	49	142	
		290A+296A	43.5	41.8	64	70	58	140	69	70	63	144	66	70	60	142	71	80	60	70	60	142	71	80	60	142	71	80	60	142	
		293A+296A	50.0	48.1	60	70	66	140	65	70	70	144	62	70	68	142	67	70	68	70	68	142	67	70	68	142	67	70	68	142	

ELECTRICAL INFORMATION

Legend and Notes for Tables 72 — 75

LEGEND:

- BRKR — Circuit breaker
- CO — Convenience outlet
- DISC — Disconnect
- FLA — Full load amps
- IFM — Indoor fan motor
- LRA — Locked rotor amps
- MCA — Minimum circuit amps
- MOCP — MAX FUSE or HACR Breaker
- PE — Power exhaust
- PWRD CO — Powered convenient outlet
- UNPWR CO — Unpowered convenient outlet

NOTES:

1. In compliance with NEC requirements for multimotor and combination load equipment (refer to NEC Articles 430 and 440), the overcurrent protective device for the unit shall be fuse or HACR breaker. Canadian units may be fuse or circuit breaker.
2. **Unbalanced 3-Phase Supply Voltage**
Never operate a motor where a phase imbalance in supply voltage is greater than 2%. Use the following formula to determine the percentage of voltage imbalance.

$$\% \text{ Voltage Imbalance} = 100 \times \frac{\text{max voltage deviation from average voltage}}{\text{average voltage}}$$

Example: Supply voltage is 230-3-60



AB = 224 V
BC = 231 V
AC = 226 V

$$\text{Average Voltage} = \frac{(224 + 231 + 226)}{3} = \frac{681}{3} = 227$$

Determine maximum deviation from average voltage.

$$(AB) 227 - 224 = 3 \text{ V}$$

$$(BC) 231 - 227 = 4 \text{ V}$$

$$(AC) 227 - 226 = 1 \text{ V}$$

Maximum deviation is 4 v.

Determine percent of voltage imbalance.

$$\% \text{ Voltage Imbalance} = 100 \times \frac{4}{227} = 1.76\%$$

This amount of phase imbalance is satisfactory as it is below the maximum allowable 2%.
IMPORTANT: If the supply voltage phase imbalance is more than 2%, contact your local electric utility company immediately.

SEQUENCE OF OPERATION

General

The sequence below describes the sequence of operation for an electro-mechanical unit with and without a factory installed EconoMi\$er™ IV and X (called “economizer” in this sequence). For information regarding a direct digital controller, see the start-up, operations, and troubleshooting manual for the applicable controller.

Electro-mechanical units with no economizer

Cooling (Single speed indoor fan motor) —

When the thermostat calls for cooling, terminals G and Y1 are energized. As a result, the indoor-fan contactor (IFC) and the compressor contactor (C1) are energized, causing the indoor-fan motor (IFM), compressor #1, and outdoor fan to start. If the unit has 2 stages of cooling, the thermostat will additionally energize Y2. The Y2 signal will energize compressor contactor #2 (C2), causing compressor #2 to start. Regardless of the number of stages, the outdoor-fan motor runs continuously while unit is cooling.

Cooling (2-speed indoor fan motor) —

Per ASHRAE 90.1 standard section 6.4.3.10.b, during the first stage of cooling operation the VFD will adjust the fan motor to provide 2/3rd of the total cfm established for the unit. When a call for the second stage of cooling is required, the VFD will allow the total cfm for the unit established (100%).

Heating

NOTE: The 50HC is sold as cooling only. If electric heaters are required, use only factory-approved electric heaters. They will operate as described below.

Units have either 1 or 2 stages of electric heat. When the thermostat calls for heating, power is applied to the W1 terminal at the unit. The unit control will energize the indoor fan contactor and the first stage of electric heat. On units with two-stage heating, when additional heating is required, the second stage of electric heat (if equipped) will be energized when power is applied at the W2 terminal on the unit.

Electro-mechanical units with an economizer

Cooling —

When free cooling is not available, the compressors will be controlled by the zone thermostat. When free cooling is available, the outdoor-air damper is modulated by the EconoMi\$er IV and X control to provide a 50°F (10°C) to 55°F (13°C) mixed-air temperature into the zone. As the mixed air temperature fluctuates above 55°F (13°C) or below 50°F (10°C) dampers will be modulated (open or close) to bring the mixed-air temperature back within control. If mechanical cooling is utilized with free cooling, the outdoor-air damper will maintain its current position at the time the compressor is started. If the

increase in cooling capacity causes the mixed-air temperature to drop below 45°F (9°C), then the outdoor-air damper position will be decreased to the minimum position. If the mixed-air temperature continues to fall, the outdoor-air damper will close. Control returns to normal once the mixed-air temperature rises above 48°F (9°C). The power exhaust fans will be energized and de-energized, if installed, as the outdoor-air damper opens and closes.

If field-installed accessory CO₂ sensors are connected to the EconoMi\$er IV and X control, a demand controlled ventilation strategy will begin to operate. As the CO₂ level in the zone increases above the CO₂ setpoint, the minimum position of the damper will be increased proportionally. As the CO₂ level decreases because of the increase in fresh air, the outdoor-air damper will be proportionally closed. For EconoMi\$er IV and X operation, there must be a thermostat call for the fan (G). If the unit is occupied and the fan is on, the damper will operate at minimum position. Otherwise, the damper will be closed.

When the EconoMi\$er IV and X control is in the occupied mode and a call for cooling exists (Y1 on the thermostat), the control will first check for indoor fan operation. If the fan is not on, then cooling will not be activated. If the fan is on, then the control will open the EconoMi\$er IV and X damper to the minimum position.

On the initial power to the EconoMi\$er IV and X control, it will take the damper up to 2 1/2 minutes before it begins to position itself. After the initial power-up, further changes in damper position can take up to 30 seconds to initiate. Damper movement from full closed to full open (or vice versa) will take between 1 1/2 and 2 1/2 minutes. If free cooling can be used as determined from the appropriate changeover command (switch, dry bulb, enthalpy curve, differential dry bulb, or differential enthalpy), then the control will modulate the dampers open to maintain the mixed-air temperature setpoint at 50°F (10°C) to 55°F (13°C). If there is a further demand for cooling (cooling second stage - Y2 is energized), then the control will bring on compressor stage 1 to maintain the mixed-air temperature setpoint. The EconoMi\$er IV and X damper will be open at maximum position. EconoMi\$er IV and X operation is limited to a single compressor.

2-Speed Note: When operating in ventilation mode only, the indoor fan motor will automatically adjust to 2/3rd of the total cfm established.

Heating

The sequence of operation for the heating is the same as an electromechanical unit with no economizer. The only difference is how the economizer acts. The economizer will stay at the Economizer Minimum Position while the evaporator fan is operating. The outdoor-air damper is closed when the indoor fan is not operating.

SEQUENCE OF OPERATION (cont.)

Optional Humidi-MiZer Dehumidification System

Units with the factory equipped Humidi-MiZer option are capable of providing multiple modes of improved dehumidification as a variation of the normal cooling cycle. The Humidi-MiZer option includes additional valves in the liquid line and discharge line of each refrigerant circuit, a small reheat condenser coil downstream of the evaporator, and Motormaster variable-speed control of some or all outdoor fans. Operation of the revised refrigerant circuit for each mode is described below.

The Humidi-MiZer system provides three sub-modes of operation: Cool, Reheat1, and Reheat2.

Cool mode - provides a normal ratio of Sensible and Latent Cooling effect from the evaporator coil.


Reheat1 - provides increased Latent Cooling while slightly reducing the Sensible Cooling effect.

Reheat2 - provides normal Latent Cooling but with null or minimum Sensible Cooling effect delivered to the space.

The Reheat1 and Reheat2 modes are available when the unit is not in a Heating mode and when the Low Ambient Lockout switch is closed.


The following diagrams depict piping for Single Stage cooling units.

SEQUENCE OF OPERATION (cont.)

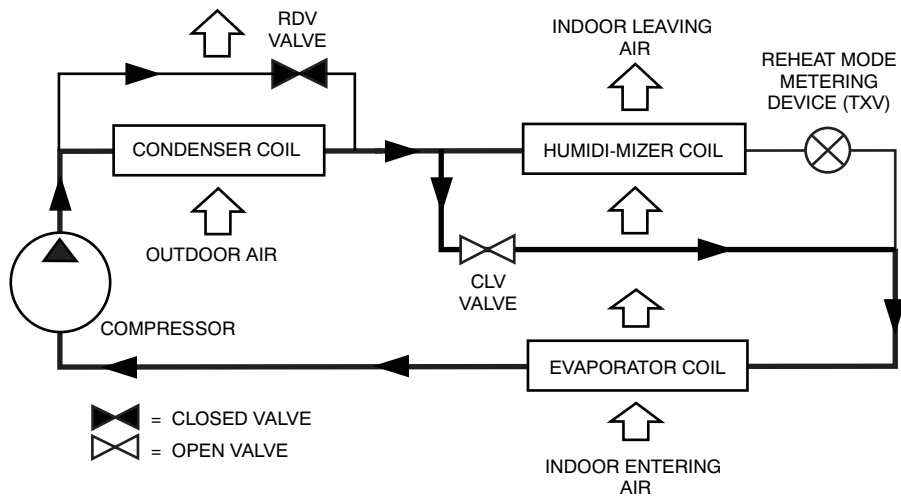


C12702

Normal Cooling Mode - Humidi-MiZer System with Single Stage Cooling

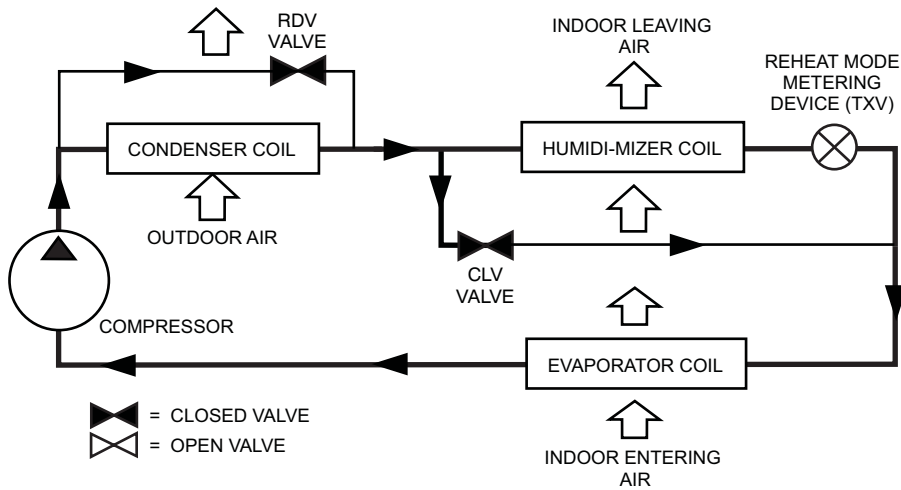

C12703

Subcooling Mode (Reheat 1) - Humidi-MiZer System with Single Stage Cooling

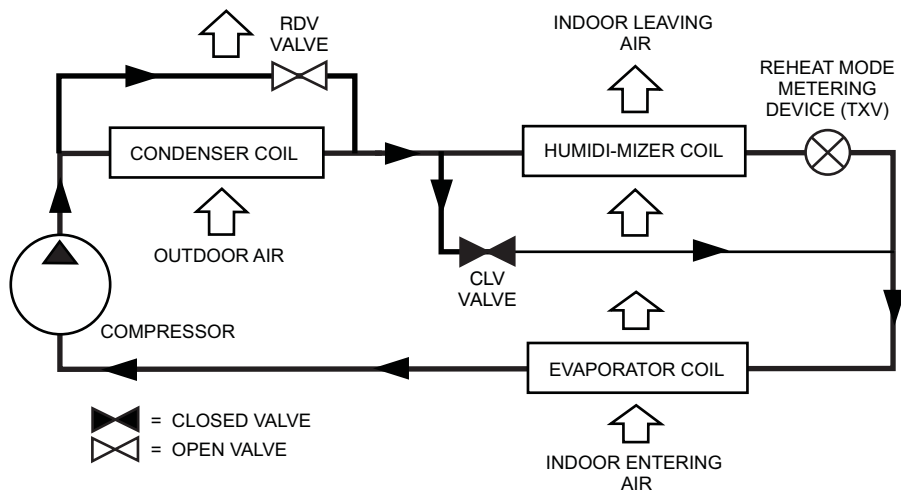

C12704

Hot Gas Reheat Mode (Reheat2) - Humidi-MiZer System with Single Stage Cooling

GUIDE SPECIFICATIONS - 50HC**04-14

Note about this specification:

This specification is in the “Masterformat” as published by the Construction Specification Institute. Please feel free to copy this specification directly into your building spec.

Cooling Only/Electric Heat Packaged Rooftop HVAC Guide Specifications

Size Range: 3 to 12.5 Nominal Tons



<u>Section</u>	<u>Description</u>
----------------	--------------------

23 06 80	Schedules for Decentralized HVAC Equipment
-----------------	---

- | | |
|----------------|---|
| 23 06 80.13 | Decentralized Unitary HVAC Equipment Schedule |
| 23 06 80.13.A. | Rooftop unit schedule |
| 1. | Schedule is per the project specification requirements. |

23 07 16	HVAC Equipment Insulation
-----------------	----------------------------------

- | | |
|----------------|---|
| 23 07 16.13 | Decentralized, Rooftop Units: |
| 23 07 16.13.A. | Evaporator fan compartment: |
| 1. | Interior cabinet surfaces shall be insulated with a minimum 1/2-in. thick, minimum 1 1/2 lb density, flexible fiberglass insulation bonded with a phenolic binder, neoprene coated on the air side. |
| 2. | Insulation and adhesive shall meet NFPA 90A requirements for flame spread and smoke generation. |
| 23 07 16.13.B. | Electric heat compartment: |
| 1. | Aluminum foil-faced fiberglass insulation shall be used. |
| 2. | Insulation and adhesive shall meet NFPA 90A requirements for flame spread and smoke generation. |

23 09 13	Instrumentation and Control Devices for HVAC
-----------------	---

- | | |
|----------------|---|
| 23 09 13.23 | Sensors and Transmitters |
| 23 09 13.23.A. | Thermostats |
| 1. | Thermostat must |
| a. | energize both “W” and “G” when calling for heat. |
| b. | have capability to energize 2 different stages of cooling, and 2 different stages of heating. |
| c. | include capability for occupancy scheduling. |

23 09 23	Direct-digital Control system for HVAC
-----------------	---

- | | |
|----------------|--|
| 23 09 23.13 | Decentralized, Rooftop Units: |
| 23 09 23.13.A. | PremierLink™ controller |
| 1. | Shall be ASHRAE 62 compliant. |
| 2. | Shall accept 18-32VAC input power. |
| 3. | Shall have an operating temperature range from -40°F (-40°C) to 158°F (70°C), 10% - 95% RH (non-condensing). |
| 4. | Shall include an integrated economizer controller to support an economizer with 4 to 20 mA actuator input and no microprocessor controller. |
| 5. | Controller shall accept the following inputs: space temperature, setpoint adjustment, outdoor air temperature, indoor air quality, outdoor air quality, indoor relative humidity, compressor lock-out, fire shutdown, enthalpy, fan status, remote time clock/door switch. |
| 6. | Shall accept a CO ₂ sensor in the conditioned space, and be Demand Control Ventilation (DCV) ready. |
| 7. | Shall provide the following outputs: Economizer, fan, cooling stage 1, cooling stage 2, heat stage 1, heat stage 2, heat stage 3/ exhaust/ reversing valve/ dehumidify/ occupied. |
| 8. | Unit shall provide surge protection for the controller through a circuit breaker. |
| 9. | Shall be Internet capable, and communicate at a Baud rate of 38.4K or faster. |
| 10. | Shall have an LED display independently showing the status of activity on the communication bus, and processor operation. |

11. Shall include an EIA-485 protocol communication port, an access port for connection of either a computer or a Carrier technician tool, an EIA-485 port for network communication to intelligent space sensors and displays, and a port to connect an optional LonWorks plug-in communications card.
12. Shall have built-in Carrier Comfort Network (CCN) protocol, and be compatible with other CCN devices, including ComfortLink and ComfortVIEW controllers.
13. Shall have built-in support for Carrier technician tool.
14. Software upgrades will be accomplished by local download. Software upgrades through chip replacements are not allowed.
15. Shall be shock resistant in all planes to 5G peak, 11ms during operation, and 100G peak, 11ms during storage.
16. Shall be vibration resistant in all planes to 1.5G @ 20-300 Hz.
17. Shall support a bus length of 4000 ft max, 60 devices per 1000 ft section, and 1 RS-485 repeater per 1000ft sections.

23 09 23.13.B. ComfortLink Unit Controls shall contain:

1. Four button detailed English scrolling marquee display.
2. CCN (Carrier Comfort Network) capable.
3. Unit control with standard suction pressure transducers and condensing temperature thermistors.
4. Shall provide a 5°F temperature difference between cooling and heating set points to meet ASHRAE 90.1 Energy Standard.
5. Shall provide and display a current alarm list and an alarm history list.
6. Service run test capability.
7. Shall accept input from a CO₂ sensor (both indoor and outdoor).
8. Configurable alarm light shall be provided which activates when certain types of alarms occur.
9. Compressor minimum run time (3 minutes) and minimum off time (5 minutes) are provided.
10. Service diagnostic mode.
11. Economizer control (optional).
12. Control multi capacity stages
13. Unit shall be complete with self-contained low voltage control circuit.
14. Unit shall have 0°F low ambient cooling operation.

23 09 23.13.C. RTU Open multi-protocol, direct digital controller:

1. Shall be ASHRAE 62 compliant.
2. Shall accept 18-30VAC, 50-60Hz, and consumer 15VA or less power.
3. Shall have an operating temperature range from -40°F (-40°C) to 130°F (54°C), 10% - 90% RH (non-condensing).
4. Shall include built-in protocol for BACNET (MS/TP and PTP modes), Modbus (RTU and ASCII), Johnson N2 and LonWorks. LonWorks Echelon processor required for all Lon applications shall be contained in separate communication board.
5. Shall allow access of up to 62 network variables (SNVT). Shall be compatible with all open controllers.
6. Baud rate Controller shall be selectable using a dipswitch.
7. Shall have an LED display independently showing the status of serial communication, running, errors, power, all digital outputs, and all analog inputs.
8. Shall accept the following inputs: space temperature, setpoint adjustment, outdoor air temperature, indoor air quality, outdoor air quality, compressor lock-out, fire shutdown, enthalpy switch, and fan status/filter status/humidity/ remote occupancy.
9. Shall provide the following outputs: economizer, fan, cooling stage 1, cooling stage 2, heat stage 1, heat stage 2, heat stage 3/ exhaust/ reversing valve.
10. Shall have built-in surge protection circuitry through solid state polyswitches. Polyswitches shall be used on incoming power and network connections. Polyswitches will return to normal when the "trip" condition clears.
11. Shall have a battery back-up capable of a minimum of 10,000 hours of data and time clock retention during power outages.
12. Shall have built-in support for Carrier technician tool.
13. Shall include an EIA-485 protocol communication port, an access port for connection of either a computer or a Carrier technician tool, an EIA-485 port for network communication to intelligent space sensors and displays, and a port to connect an optional LonWorks communications card.
14. Software upgrades will be accomplished by either local or remote download. No software upgrades through chip replacements are allowed.

23 09 33 Electric and Electronic Control System for HVAC

23 09 33.13 Decentralized, Rooftop Units:

23 09 33.13.A. General:

1. Shall be complete with self-contained low-voltage control circuit protected by a resettable circuit breaker on the 24-v transformer side. Transformer shall have 75VA capability.
2. Shall utilize color-coded wiring.
3. Shall include a central control terminal board to conveniently and safely provide connection points for vital control functions such as: smoke detectors, phase monitor, economizer, thermostat, DDC control options, and low and high pressure switches.
4. Unit shall include a minimum of one 8-pin screw terminal connection board for connection of control wiring.

23 09 33.23.B. Safeties:

1. Compressor over-temperature, over current.
2. Low-pressure switch.
 - a. Units with 2 compressors shall have different sized connectors for the circuit 1 and circuit 2 low and high pressure switches. They shall physically prevent the cross-wiring of the safety switches between circuits 1 and 2.
 - b. Low pressure switch shall use different color wire than the high pressure switch. The purpose is to assist the installer and service technician to correctly wire and or troubleshoot the rooftop unit.
3. High-pressure switch.
 - a. Units with 2 compressors shall have different sized connectors for the circuit 1 and circuit 2 low and high pressure switches. They shall physically prevent the cross-wiring of the safety switches between circuits 1 and 2.
 - b. High pressure switch shall use different color wire than the low pressure switch. The purpose is to assist the installer and service technician to correctly wire and or troubleshoot the rooftop unit.
4. Automatic reset, motor thermal overload protector.

23 09 93 Sequence of Operations for HVAC Controls

23 09 93.13 Decentralized, Rooftop Units:

23 09 93.13 INSERT SEQUENCE OF OPERATION

23 40 13 Panel Air Filters

23 40 13.13 Decentralized, Rooftop Units:

23 40 13.13.A. Standard filter section

1. Shall consist of factory-installed, low velocity, throwaway 2-in. thick fiberglass filters of commercially available sizes.
2. Unit shall use only one filter size. Multiple sizes are not acceptable.
3. Filters shall be accessible through an access panel with “no-tool” removal as described in the unit cabinet section of this specification (23 81 19.13.G).

23 81 19 Self-Contained Air Conditioners

23 81 19.13 Small-Capacity Self-Contained Air Conditioners (50HC**04-14)

23 81 19.13.A. General

1. Outdoor, rooftop mounted, electrically controlled, heating and cooling unit utilizing a(n) hermetic scroll compressor(s) for cooling duty and gas combustion for heating duty.
2. Factory assembled, single-piece heating and cooling rooftop unit. Contained within the unit enclosure shall be all factory wiring, piping, controls, and special features required prior to field start-up.
3. Unit shall use Puron[®] refrigerant.
4. Unit shall be installed in accordance with the manufacturer’s instructions.
5. Unit must be selected and installed in compliance with local, state, and federal codes.

23 81 19.13.B. Quality Assurance

1. Unit meets ASHRAE 90.1 minimum efficiency requirements.
2. 3 phase units are Energy Star qualified.
3. Unit shall be rated in accordance with AHRI Standards 210/240 and 340/360.
4. Unit shall be designed to conform to ASHRAE 15.
5. Unit shall be UL-tested and certified in accordance with ANSI Z21.47 Standards and UL-listed and certified under Canadian standards as a total package for safety requirements.
6. Insulation and adhesive shall meet NFPA 90A requirements for flame spread and smoke generation.

7. Unit casing shall be capable of withstanding 500-hour salt spray exposure per ASTM B117 (scribed specimen).
 8. Unit shall be designed in accordance with ISO 9001, and shall be manufactured in a facility registered by ISO 9001.
 9. Roof curb shall be designed to conform to NRCA Standards.
 10. Unit shall be subjected to a completely automated run test on the assembly line. The data for each unit will be stored at the factory, and must be available upon request.
 11. Unit shall be designed in accordance with UL Standard 1995, including tested to withstand rain.
 12. Unit shall be constructed to prevent intrusion of snow and tested to prevent snow intrusion into the control box up to 40 mph.
 13. Unit shake tested to assurance level 1, ASTM D4169 to ensure shipping reliability.
 14. High Efficient Motors listed shall meet section 313 of the Energy Independence and Security Act of 2007 (EISA 2007).
- 23 81 19.13.C. Delivery, Storage, and Handling
1. Unit shall be stored and handled per manufacturer's recommendations.
 2. Lifted by crane requires either shipping top panel or spreader bars.
 3. Unit shall only be stored or positioned in the upright position.
- 23 81 19.13.D. Project Conditions
1. As specified in the contract.
- 23 81 19.13.E. Operating Characteristics
1. Unit shall be capable of starting and running at 125°F (52°C) ambient outdoor temperature, meeting maximum load criteria of AHRI Standard 210/240 or 340/360 at ± 10% voltage.
 2. Compressor with standard controls shall be capable of operation down to 35°F (2°C), ambient outdoor temperatures. Accessory low ambient kits shall be available if operation below 35°F (2°C), is required. See below for head pressure control package or winter start kit.
 3. Unit shall discharge supply air vertically or horizontally as shown on contract drawings.
 4. Unit shall be factory configured for vertical supply & return configurations.
 5. Unit shall be field convertible from vertical to horizontal airflow on all models. No special kit required on 04-12 models. Supply duct kit required for 14 size model only.
 6. Unit shall be capable of mixed operation: vertical supply with horizontal return or horizontal supply with vertical return.
- 23 81 19.13.F. Electrical Requirements
1. Main power supply voltage, phase, and frequency must match those required by the manufacturer.
- 23 81 19.13.G. Unit Cabinet
1. Unit cabinet shall be constructed of galvanized steel, and shall be bonderized and coated with a pre-painted baked enamel finish on all externally exposed surfaces.
 2. Unit cabinet exterior paint shall be: film thickness, (dry) 0.003 inches minimum, gloss (per ASTM D523, 60°F): 60, Hardness: H-2H Pencil hardness.
 3. Evaporator fan compartment interior cabinet insulation shall conform to AHRI Standards 210/240 or 340/360 minimum exterior sweat criteria. Interior surfaces shall be insulated with a minimum 1/2-in. thick, 1 lb density, flexible fiberglass insulation, neoprene coated on the air side. Aluminum foil-faced fiberglass insulation shall be used in the heat compartment.
 4. Base of unit shall have a minimum of four locations for thru-the-base gas and electrical connections (factory installed or field installed), standard.
 5. Base Rail
 - a. Unit shall have base rails on a minimum of 3 sides.
 - b. Holes shall be provided in the base rails for rigging shackles to facilitate maneuvering and overhead rigging.
 - c. Holes shall be provided in the base rail for moving the rooftop by fork truck.
 - d. Base rail shall be a minimum of 16 gauge thickness.
 6. Condensate pan and connections:
 - a. Shall be an internally sloped condensate drain pan made of a non-corrosive material.
 - b. Shall comply with ASHRAE Standard 62.
 - c. Shall use a 3/4" -14 NPT drain connection, possible either through the bottom or end of the drain pan. Connection shall be made per manufacturer's recommendations.
 7. Top panel:
 - a. Shall be a single piece top panel on 04 thru 12 sizes, two piece on 14 size.

8. Electrical Connections

- a. All unit power wiring shall enter unit cabinet at a single, factory-prepared, knockout location.
- b. Thru-the-base capability
 - (1.) Standard unit shall have a thru-the-base electrical location(s) using a raised, embossed portion of the unit basepan.
 - (2.) Optional, factory-approved, water-tight connection method must be used for thru-the-base electrical connections.
 - (3.) No basepan penetration, other than those authorized by the manufacturer, is permitted.

9. Component access panels (standard)

- a. Cabinet panels shall be easily removable for servicing.
- b. Unit shall have one factory installed, tool-less, removable, filter access panel.
- c. Panels covering control box, indoor fan, indoor fan motor, gas components (where applicable), and compressors shall have molded composite handles.
- d. Handles shall be UV modified, composite, permanently attached, and recessed into the panel.
- e. Screws on the vertical portion of all removable access panel shall engage into heat resistant, molded composite collars.
- f. Collars shall be removable and easily replaceable using manufacturer recommended parts.

23 81 19.13.H. Coils

1. Standard Aluminum Fin/Copper Tube Coils:

- a. Standard evaporator and condenser coils shall have aluminum lanced plate fins mechanically bonded to seamless internally grooved copper tubes with all joints brazed.
- b. Evaporator coils shall be leak tested to 150 psig, pressure tested to 450 psig, and qualified to UL 1995 burst test at 1775 psig.
- c. Condenser coils shall be leak tested to 150 psig, pressure tested to 650 psig, and qualified to UL 1995 burst test at 1980 psig.

2. Optional Pre-coated aluminum-fin condenser coils (3 phase models only):

- a. Shall have a durable epoxy-phenolic coating to provide protection in mildly corrosive coastal environments.
- b. Coating shall be applied to the aluminum fin stock prior to the fin stamping process to create an inert barrier between the aluminum fin and copper tube.
- c. Epoxy-phenolic barrier shall minimize galvanic action between dissimilar metals.

3. Optional Copper-fin evaporator and condenser coils (3 phase models only):

- a. Shall be constructed of copper fins mechanically bonded to copper tubes and copper tube sheets.
- b. Galvanized steel tube sheets shall not be acceptable.
- c. A polymer strip shall prevent coil assembly from contacting the sheet metal coil pan to minimize potential for galvanic corrosion between coil and pan.

4. Optional E-coated aluminum-fin evaporator and condenser coils (3 phase models only):

- a. Shall have a flexible epoxy polymer coating uniformly applied to all coil surface areas without material bridging between fins.
- b. Coating process shall ensure complete coil encapsulation of tubes, fins and headers.
- c. Color shall be high gloss black with gloss per ASTM D523-89.
- d. Uniform dry film thickness from 0.8 to 1.2 mil on all surface areas including fin edges.
- e. Superior hardness characteristics of 2H per ASTM D3363-92A and cross-hatch adhesion of 4B-5B per ASTM D3359-93.
- f. Impact resistance shall be up to 160 in.-lb (ASTM D2794-93).
- g. Humidity and water immersion resistance shall be up to minimum 1000 and 250 hours respectively (ASTM D2247-92 and ASTM D870-92).
- h. Corrosion durability shall be confirmed through testing to be no less than 1000 hours salt spray per ASTM B117-90.

23 81 19.13.I. Refrigerant Components

1. Refrigerant circuit shall include the following control, safety, and maintenance features:

- a. Thermostatic Expansion Valve (TXV) shall help provide optimum performance across the entire operating range. Shall contain removable power element to allow change out of power element and bulb without removing the valve body.
- b. Refrigerant filter drier.
- c. Service gauge connections on suction and discharge lines.

- d. Pressure gauge access through a specially designed access port in the top panel of the unit.
- 2. There shall be gauge line access port in the skin of the rooftop, covered by a black, removable plug.
 - a. The plug shall be easy to remove and replace.
 - b. When the plug is removed, the gauge access port shall enable maintenance personnel to route their pressure gauge lines.
 - c. This gauge access port shall facilitate correct and accurate condenser pressure readings by enabling the reading with the compressor access panel on.
 - d. The plug shall be made of a leak proof, UV-resistant, composite material.

3. Compressors

- a. Unit shall use one fully hermetic, scroll compressor for each independent refrigeration circuit.
- b. Models shall be available with single compressor/single stage cooling designs on 04-07 sizes and 2 compressor/2-stage cooling models on 08-14 sizes.
- c. Compressor motors shall be cooled by refrigerant gas passing through motor windings.
- d. Compressors shall be internally protected from high discharge temperature conditions.
- e. Compressors shall be protected from an over-temperature and over-ampereage conditions by an internal, motor overload device.
- f. Compressor shall be factory mounted on rubber grommets.
- g. Compressor motors shall have internal line break thermal, current overload and high pressure differential protection.
- h. Crankcase heaters shall not be required for normal operating range, unless provided by the factory.

23 81 19.13.J. Filter Section

- 1. Filters access is specified in the unit cabinet section of this specification.
- 2. Filters shall be held in place by a pivoting filter tray, facilitating easy removal and installation.
- 3. Shall consist of factory-installed, low velocity, throw-away 2-in. thick fiberglass filters.
- 4. Filters shall be standard, commercially available sizes.
- 5. Only one size filter per unit is allowed.

23 81 19.13.K. Evaporator Fan and Motor

- 1. Evaporator fan motor:
 - a. Shall have permanently lubricated bearings.
 - b. Shall have inherent automatic-reset thermal overload protection or circuit breaker.
 - c. Shall have a maximum continuous bhp rating for continuous duty operation; no safety factors above that rating shall be required.
- 2. Electric Drive (Direct Drive) X13 – 5 Speed/Torque Evaporator Fan:
 - a. Multi speed motor with easy quick adjustment settings.
 - b. Blower fan shall be double-inlet type with forward-curved blades.
 - c. Shall be constructed from steel with a corrosion resistant finish and dynamically balanced.
 - d. Standard on all 04-06 models with 208/230/1/60 operation without Humidi-MiZer.
 - e. Standard on all 04-06 3-phase models without Humidi-MiZer, with optional belt drive.
- 3. Belt-driven Evaporator Fan:
 - a. Belt drive shall include an adjustable-pitch motor pulley.
 - b. Shall use sealed, permanently lubricated ball-bearing type.
 - c. Blower fan shall be double-inlet type with forward-curved blades.
 - d. Shall be constructed from steel with a corrosion resistant finish and dynamically balanced.
 - e. Standard on all 04-07 size and 04-06 size models with Humidi-MiZer. Optional on all 04-06 3-phase models.

23 81 19.13.L. Condenser Fans and Motors

- 1. Condenser fan motors:
 - a. Shall be a totally enclosed motor.
 - b. Shall use permanently lubricated bearings.
 - c. Shall have inherent thermal overload protection with an automatic reset feature.
 - d. Shall use a shaft-down design on 04 to 14 models.
- 2. Condenser Fans:
 - a. Shall be a direct-driven propeller type fan.
 - b. Shall have galvalum blades riveted to corrosion-resistant steel spiders and shall be dynamically balanced.

23 81 19.13.M. Special Features, Options and Accessories

1. Staged Air Volume System (SAV) for 2-stage cooling models only:
 - a. Evaporator fan motor:
 - (1.) Shall have permanently lubricated bearings.
 - (2.) Shall have a maximum continuous bhp rating for continuous duty operation; no safety factors above that rating.
 - (3.) Shall be Variable Frequency duty and 2-speed control.
 - (4.) Shall contain motor shaft grounding ring to prevent electrical bearing fluting damage by safely diverting harmful shaft voltages and bearing currents to ground.
2. Variable Frequency Drive (VFD). Only available on 2-speed indoor fan motor option (SAV):
 - a. Shall be installed inside the unit cabinet, mounted, wired and tested.
 - b. Shall contain Electromagnetic Interference (EMI) frequency protection.
 - c. Insulated Gate Bi-Polar Transistors (IGBT) used to produce the output pulse width modulated (PWM) waveform, allowing for quiet motor operation.
 - d. Self diagnostics with fault and power code LED indicator. Field accessory Display Kit available for further diagnostics and special setup applications.
 - e. RS485 capability standard.
 - f. Electronic thermal overload protection.
 - g. 5% swinging chokes for harmonic reduction and improved power factor.
 - h. All printed circuit boards shall be conformal coated.
3. Integrated EconoMi\$er IV, EconoMi\$er2, and EconoMi\$er X standard leak rate models. (Factory installed on 3 phase models only. Field installed on all 3 and 1 phase models)
 - a. Integrated, gear driven opposing modulating blade design type capable of simultaneous economizer and compressor operation.
 - b. Independent modules for vertical or horizontal return configuration shall be available. Vertical return modules shall be available as a factory installed option.
 - c. Damper blades shall be galvanized steel with composite gears. Plastic or composite blades on intake or return shall not be acceptable.
 - d. Shall include all hardware and controls to provide free cooling with outdoor air when temperature and/or humidity are below setpoints.
 - e. Shall be equipped with gear driven dampers for both the outdoor ventilation air and the return air for positive air stream control.
 - f. Standard leak rate shall be equipped with dampers not to exceed 2% leakage at 1 in. wg pressure differential.
 - g. Economizer controller on EconoMi\$er IV models shall be the Honeywell W7212 that provides:
 - (1.) Combined minimum and DCV maximum damper position potentiometers with compressor staging relay.
 - (2.) Functions with solid state analog enthalpy or dry bulb changeover control sensing.
 - (3.) Contain LED indicates for: when free cooling is available, when module is in DCV mode, when exhaust fan contact is closed.
 - h. Economizer controller on EconoMi\$er X models shall be the Honeywell W7220 that provides:
 - (1.) 2-line LCD interface screen for setup, configuration and troubleshooting
 - (2.) On-board Fault Detection and Diagnostics (FDD) that senses and alerts when the economizer is not operating properly, per California Title 24.
 - (3.) Sensor failure loss of communication identification
 - (4.) Automatic sensor detection
 - (5.) Capabilities for use with multiple-speed indoor fan systems
 - (6.) Utilize digital sensors: Dry bulb and Enthalpy
 - i. Economizer controller on EconoMi\$er 2 models with PremierLink shall be 4-20mA design and controlled by the PremierLink controller. PremierLink does not comply with California Title 24 Fault Detection & Diagnostic (FDD) requirements.
 - j. Economizer controller on EconoMi\$er 2 models with RTU Open models shall be a 4-20mA design controlled directly by the RTU Open controller. RTU Open meets California Title 24 Fault Detection & Diagnostic (FDD) requirements.
 - k. Economizer controller on EconoMi\$er 2 models with ComfortLink models shall be controlled directly by the ComfortLink controller. ComfortLink meets California Title 24 Fault Detection & Diagnostic (FDD) requirements.
 - l. Shall be capable of introducing up to 100% outdoor air.

- m. Shall be equipped with a barometric relief damper capable of relieving up to 100% return air and contain seals that meet ASHRAE 90.1 requirements.
 - n. Shall be designed to close damper(s) during loss-of-power situations with spring return built into motor.
 - o. Dry bulb outdoor air temperature sensor shall be provided as standard. Enthalpy sensor is also available on factory installed only. Outdoor air sensor setpoint shall be adjustable and shall range from 40 to 100° F / 4 to 38° C. Additional sensor options shall be available as accessories.
 - p. The economizer controller shall also provide control of an accessory power exhaust unit function. Factory set at 100%, with a range of 0% to 100%.
 - q. The economizer shall maintain minimum airflow into the building during occupied period and provide design ventilation rate for full occupancy.
 - r. Dampers shall be completely closed when the unit is in the unoccupied mode.
 - s. Economizer controller shall accept a 2-10 Vdc CO₂ sensor input for IAQ/DCV control. In this mode, dampers shall modulate the outdoor air damper to provide ventilation based on the sensor input.
 - t. Compressor lockout temperature on W7220 is adjustable from -45° F to 80° F, set at a factory default of 32° F. Others shall open at 35° F (2° C) and closes at 50° F (10° C)
 - u. Actuator shall be direct coupled to economizer gear. No linkage arms or control rods shall be acceptable.
 - v. Economizer controller shall provide indications when in free cooling mode, in the DCV mode, or the exhaust fan contact is closed.
4. Integrated EconoMi\$er 2, and EconoMi\$er X Ultra Low Leak rate models. (Factory installed on 3 phase models only. Field installed on all 3 and 1 phase models)
- a. Integrated, gear driven opposing modulating blade design type capable of simultaneous economizer and compressor operation.
 - b. Independent modules for vertical or horizontal return configuration shall be available. Vertical return modules shall be available as a factory installed option.
 - c. Damper blades shall be galvanized steel with composite gears. Plastic or composite blades on intake or return shall not be acceptable.
 - d. Shall include all hardware and controls to provide free cooling with outdoor air when temperature and/or humidity are below setpoints.
 - e. Shall be equipped with gear driven dampers for both the outdoor ventilation air and the return air for positive air stream control.
 - f. Ultra Low Leak design meets California Title 24 section 140.4 and ASHRAE 90.1 requirements of 4 cfm per sq. ft. on the outside air dampers and 10 cfm per sq. ft. on the return dampers.
 - g. Economizer controller on EconoMi\$er X models shall be the Honeywell W7220 that provides:
 - (1.) 2-line LCD interface screen for setup, configuration and troubleshooting
 - (2.) On-board Fault Detection and Diagnostics (FDD) that senses and alerts when the economizer is not operating properly, per California Title 24.
 - (3.) Sensor failure loss of communication identification
 - (4.) Automatic sensor detection
 - (5.) Capabilities for use with multiple-speed indoor fan systems
 - (6.) Utilize digital sensors: Dry bulb and Enthalpy
 - h. Economizer controller on EconoMi\$er 2 models with RTU Open models shall be a 4-20mA design controlled directly by the RTU Open controller. RTU Open meets California Title 24 Fault Detection & Diagnostic (FDD) requirements
 - i. Economizer controller on EconoMi\$er 2 models with ComfortLink models shall be controlled directly by the ComfortLink controller. ComfortLink meets California Title 24 Fault Detection & Diagnostic (FDD) requirements.
 - j. Shall be capable of introducing up to 100% outdoor air.
 - k. Shall be equipped with a barometric relief damper capable of relieving up to 100% return air and contain seals that meet ASHRAE 90.1 requirements.
 - l. Shall be designed to close damper(s) during loss-of-power situations with spring return built into motor.
 - m. Dry bulb outdoor air temperature sensor shall be provided as standard. Enthalpy sensor is also available on factory installed only. Outdoor air sensor setpoint shall be adjustable and shall range from 40 to 100° F / 4 to 38° C. Additional sensor options shall be available as accessories.
 - n. The economizer controller shall also provide control of an accessory power exhaust unit function. Factory set at 100%, with a range of 0% to 100%.
 - o. The economizer shall maintain minimum airflow into the building during occupied period and provide design ventilation rate for full occupancy.

- p. Dampers shall be completely closed when the unit is in the unoccupied mode.
 - q. Economizer controller shall accept a 2-10 Vdc CO₂ sensor input for IAQ/DCV control. In this mode, dampers shall modulate the outdoor air damper to provide ventilation based on the sensor input.
 - r. Compressor lockout temperature on W7220 is adjustable from -45 F to 80 F, set at a factory default of 32° F. Others shall open at 35° F (2° C) and closes at 50° F (10° C)
 - s. Actuator shall be direct coupled to economizer gear. No linkage arms or control rods shall be acceptable.
 - t. Economizer controller shall provide indications when in free cooling mode, in the DCV mode, or the exhaust fan contact is closed.
5. Two-Position Damper (Factory installed on 3 Phase Models Only. Field installed on all 3 and 1 Phase Models)
 - a. Damper shall be a Two-Position Damper. Damper travel shall be from the full closed position to the field adjustable %-open setpoint.
 - b. Damper shall include adjustable damper travel from 25% to 100% (full open).
 - c. Damper shall include single or dual blade, gear driven dampers and actuator motor.
 - d. Actuator shall be direct coupled to damper gear. No linkage arms or control rods shall be acceptable.
 - e. Damper will admit up to 100% outdoor air for applicable rooftop units.
 - f. Damper shall close upon indoor (evaporator) fan shutoff and/or loss of power.
 - g. The damper actuator shall plug into the rooftop unit's wiring harness plug. No hard wiring shall be required.
 - h. Outside air hood shall include aluminum water entrainment filter.
 - i. Not available with Staged Air Volume (SAV) models.
 6. Manual damper
 - a. Manual damper package shall consist of damper, air inlet screen, and rain hood which can be preset to admit up to 50% outdoor air for year round ventilation.
 - b. Not available with Staged Air Volume (SAV) models.
 7. Humidi-MiZer Adaptive Dehumidification System (3 phase models only):
 - a. The Humidi-MiZer Adaptive Dehumidification System shall be factory-installed and shall provide greater dehumidification of the occupied space by two modes of dehumidification operations beside its normal design cooling mode:
 - (1.) Subcooling mode further subcools the hot liquid refrigerant leaving the condenser coil when both temperature and humidity in the space are not satisfied.
 - (2.) Hot gas reheat mode shall mix a portion of the hot gas from the discharge of the compressor with the hot liquid refrigerant leaving the condenser coil to create a two-phase heat transfer in the system, resulting in a neutral leaving- air temperature when only humidity in the space is not satisfied.
 - (3.) Includes Head Pressure Controller.
 8. Head Pressure Control Package (MotorMaster)
 - a. Controller shall control coil head pressure by condenser-fan speed modulation or condenser-fan cycling and wind baffles.
 - b. Shall consist of solid-state control and condenser-coil temperature sensor to maintain condensing temperature at outdoor ambient temperatures down to -20° F (-29° C).
 9. Low Ambient Controller (Factory installed only)
 - a. Controller shall control coil head pressure by condenser-fan speed modulation or condenser-fan cycling and wind baffles.
 - b. Shall consist of solid-state control and condenser-coil temperature sensor to maintain condensing temperature at outdoor ambient temperatures down to 0° F (-18° C). (Not available on 11 size models as standard unit cooling operation down to 0° F/-18° C.)
 10. Condenser Coil Hail Guard Assembly (Factory installed option on 3 phase models. Field installed on all 3 and 1 phase models)
 - a. Shall protect against damage from hail.
 - b. Shall be louvered design.
 11. Unit-Mounted, Non-Fused Disconnect Switch:
 - a. Switch shall be factory-installed, internally mounted.
 - b. National Electric Code (NEC) and UL or ETL approved non-fused switch shall provide unit power shutoff.
 - c. Shall be accessible from outside the unit
 - d. Shall provide local shutdown and lockout capability.
 12. HACR Breaker

- a. These manual reset devices provide overload and short circuit protection for the unit. Factory wired and mounted with the units, with access cover to help provide environmental protection. On 575V applications, HACR breaker can only be used with WYE power distribution systems. Use on Delta power distribution systems is prohibited.
13. Convenience Outlet:
- a. Powered convenience outlet (3 phase models only).
 - (1.) Outlet shall be powered from main line power to the rooftop unit.
 - (2.) Outlet shall be powered from line side or load side of disconnect by installing contractor, as required by code. If outlet is powered from load side of disconnect, unit electrical ratings shall be UL or ETL certified and rated for additional outlet amperage.
 - (3.) Outlet shall be factory-installed and internally mounted with easily accessible 115-v female receptacle.
 - (4.) Outlet shall include 15 amp GFI receptacles with independent fuse protection.
 - (5.) Voltage required to operate convenience outlet shall be provided by a factory-installed step-down transformer.
 - (6.) Outlet shall be accessible from outside the unit.
 - (7.) Outlet shall include a field-installed "Wet in Use" cover.
 - b. Non-Powered convenience outlet.
 - (1.) Outlet shall be powered from a separate 115/120v power source.
 - (2.) A transformer shall not be included.
 - (3.) Outlet shall be factory-installed and internally mounted with easily accessible 115-v female receptacle.
 - (4.) Outlet shall include 15 amp GFI receptacles with independent fuse protection.
 - (5.) Outlet shall be accessible from outside the unit.
 - (6.) Outlet shall include a field-installed "Wet in Use" cover.
14. Thru-the-Base Connectors:
- a. Kits shall provide connectors to permit electrical connections to be brought to the unit through the unit basepan.
 - b. Minimum of four connection locations per unit.
15. Propeller Power Exhaust:
- a. Power exhaust shall be used in conjunction with an integrated economizer.
 - b. Independent modules for vertical or horizontal return configurations shall be available.
 - c. Horizontal power exhaust is shall be mounted in return ductwork.
 - d. Power exhaust shall be controlled by economizer controller operation. Exhaust fans shall be energized when dampers open past the 0-100% adjustable setpoint on the economizer control.
16. Roof Curbs (Vertical):
- a. Full perimeter roof curb with exhaust capability providing separate air streams for energy recovery from the exhaust air without supply air contamination.
 - b. Formed galvanized steel with wood nailer strip and shall be capable of supporting entire unit weight.
 - c. Permits installation and securing of ductwork to curb prior to mounting unit on the curb.
17. High-Static Indoor Fan Motor(s) and Drive(s):
- a. High-static motor(s) and drive(s) shall be factory-installed to provide additional performance range.
18. Condenser Coil Grille:
- a. Shall protect against damage from hail.
 - b. Shall be of louvered style.
19. Thru-the-Bottom Utility Connectors:
- a. Kit shall provide connectors to permit gas and electrical connections to be brought to the unit through the basepan.
20. Outdoor Air Enthalpy Sensor:
- a. The outdoor air enthalpy sensor shall be used to provide single enthalpy control. When used in conjunction with a return air enthalpy sensor, the unit will provide differential enthalpy control. The sensor allows the unit to determine if outside air is suitable for free cooling.
21. Return Air Enthalpy Sensor:
- a. The return air enthalpy sensor shall be used in conjunction with an outdoor air enthalpy sensor to provide differential enthalpy control.
22. Indoor Air Quality (CO₂) Sensor:
- a. Shall be able to provide demand ventilation indoor air quality (IAQ) control.

- b. The IAQ sensor shall be available in duct mount, wall mount, or wall mount with LED display. The setpoint shall have adjustment capability.
23. Smoke detectors (factory-installed only):
- a. Shall be a Four-Wire Controller and Detector.
 - b. Shall be environmental compensated with differential sensing for reliable, stable, and drift-free sensitivity.
 - c. Shall use magnet-activated test/reset sensor switches.
 - d. Shall have tool-less connection terminal access.
 - e. Shall have a recessed momentary switch for testing and resetting the detector.
 - f. Controller shall include:
 - (1.) One set of normally open alarm initiation contacts for connection to an initiating device circuit on a fire alarm control panel.
 - (2.) Two Form-C auxiliary alarm relays for interface with rooftop unit or other equipment.
 - (3.) One Form-C supervision (trouble) relay to control the operation of the Trouble LED on a remote test/reset station.
 - (4.) Capable of direct connection to two individual detector modules.
 - (5.) Can be wired to up to 14 other duct smoke detectors for multiple fan shutdown applications.
24. Winter start kit
- a. Shall contain a bypass device around the low pressure switch.
 - b. Shall be required when mechanical cooling is required down to 25°F (-4°C).
 - c. Shall not be required to operate on an economizer when below an outdoor ambient of 40°F (4°C).
25. Time Guard
- a. Shall prevent compressor short cycling by providing a 5-minute delay (± 2 minutes) before restarting a compressor after shutdown for any reason.
 - b. One device shall be required per compressor.
26. Electric Heat:
- a. Heating Section
 - (1.) Heater element open coil resistance wire, nickel-chrome alloy, 0.29 inches inside diameter, strung through ceramic insulators mounted on metal frame. Coil ends are staked and welded to terminal screw slots.
 - (2.) Heater assemblies are provided with integral fusing for protection of internal heater circuits not exceeding 48 amps each. Auto reset thermo limit controls, magnetic heater contactors (24 v coil) and terminal block all mounted in electric heater control box (minimum 18 ga galvanized steel) attached to end of heater assembly.
27. Hinged access panels:
- a. Shall provide easy access through integrated quarter turn latches.
 - b. Shall be on major panels of; filter, control box, fan motor and compressor.
28. Display Kit for Variable Frequency Drive
- a. Kit allows the ability to access the VFD controller programs to provide special setup capabilities and diagnostics.
 - b. Kit contains display module and communication cable.
 - c. Display Kit can be permanently installed in the unit or used on any SAV system VFD controller as needed.
29. Foil faced insulation
- a. Throughout unit cabinet air stream, non-fibrous and cleanable foil faced insulation is used.

